


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

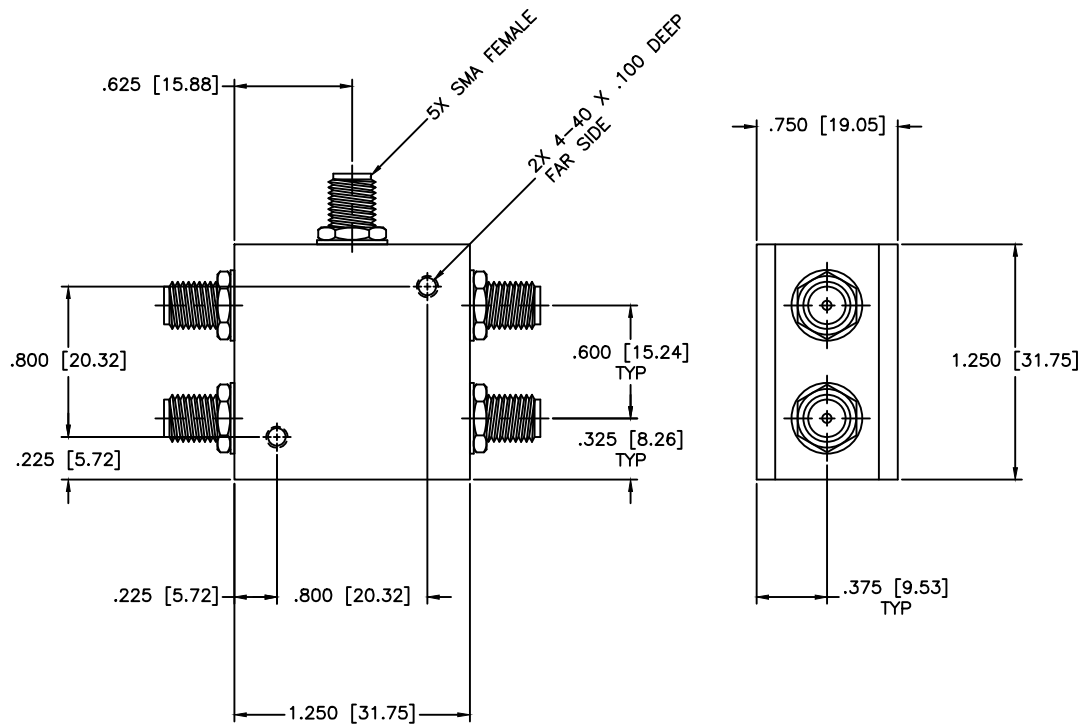

**SPECIFICATIONS**

Frequency Range: 200–1000 MHz  
 Insertion Loss: 3.0dB Max.  
 Input Power: 1 Watt  
 Impedance: 50 Ohms  
 Isolation: 15dB Min.  
 Phase Balance:  $\pm 7$  Deg. Max.  
 Amplitude Balance:  $\pm 0.7$ dB Max.  
 Operating Temperature:  $-20^{\circ}\text{C}$  to  $+70^{\circ}\text{C}$

MATERIAL:		<b>MCLI</b> MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 <a href="http://www.mcli.com">http://www.mcli.com</a>	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^{\circ}$		DRAWING TITLE: <b>4-WAY POWER DIVIDER</b>		
DRAWN: Paiboon Luekhamhan		PART NO. <b>PL4-3</b>		
DATE: 03-20-2008		CAGE CODE: OD2L5		
APPROVED: T. Nguyen		DATE: 03-20-2008		
THIRD ANGLE PROJECTION		SIZE: A REV: A DWG NO. 82810		
		DO NOT SCALE THE DRAWING		