

SMP-MALE PCB SMOOTH BORE CATCHERS MITT

SC5361

SPECIFICATIONS


ELECTRICAL:

FREQUENCY: 0-18 GHZ
IMPEDANCE: 50 OHMS
OP. TEMP RANGE: -55C- +155C

MECHANICAL:

MATERIAL BODY: BeCu
CENTER CONTACT: BeCu
PLATING: Au MIL-G-45204
INSULATOR: TEFLON
INTERFACE: DESC 94007
SMOOTH BORE
CATCHERS MITT
FORCE TO ENGAGE: 2.0 LBS MAX
FORCE TO DISENGAGE: 0.5 LBS MIN

ROHS COMPLIANT

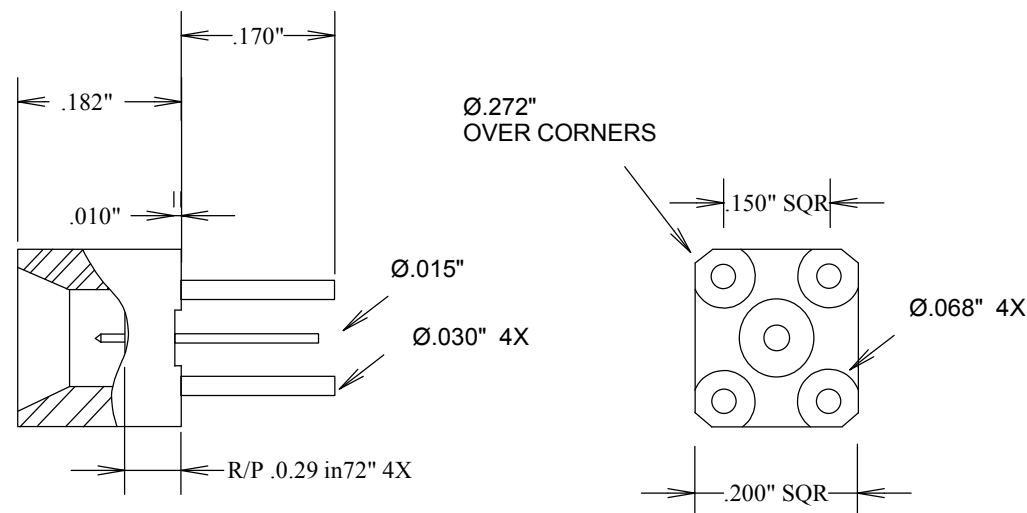

FAIRVIEW MICROWAVE INC.				
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM				
TITLE				
SMP-MALE PCB SMOOTH BORE CATCHERS MITT				
SIZE	CAGE CODE	DWG NO	REV	
A	3FKR5	SC5361	--	
SCALE			SHEET	