


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

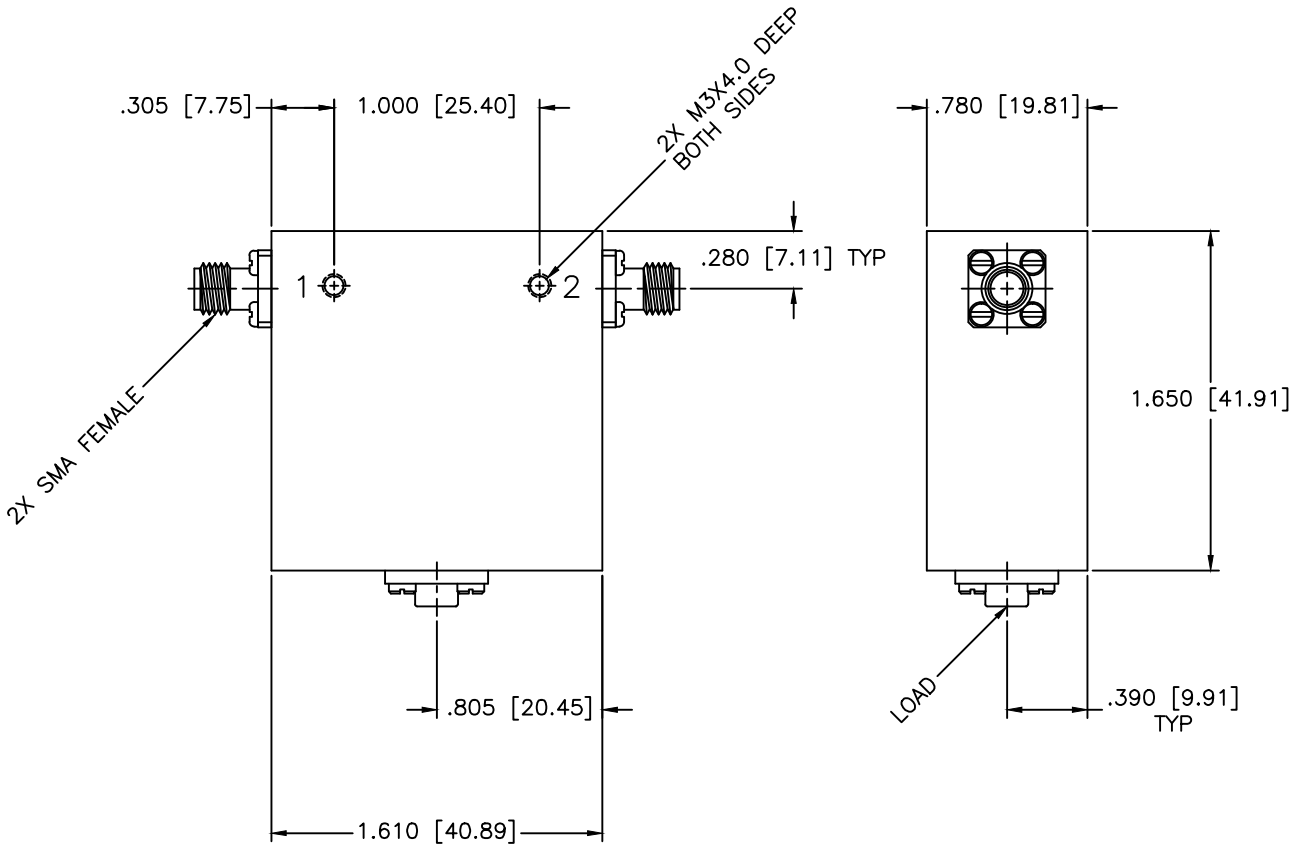

**SPECIFICATIONS**

Frequency Range: 2–4.5 GHz  
 Isolation: 16dB Min.  
 Insertion loss: 0.7dB Max.  
 VSWR: 1.40:1 Max.  
 Power Avg, Peak: 50W, 250W

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 10-08-1998
APPROVED: T. Nguyen	DATE: 10-08-1998




MICROWAVE COMMUNICATIONS LABORATORIES INC.  
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710  
 TEL: (727) 344-6254 FAX: (727) 381-6116  
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:  
 TOLERANCES  
 IN (INCHES) OR [mm] (MILLIMETERS)  
 FRACTIONS: ± 1/64  
 DECIMALS: ±.01 ±.005  
 ANGLE: ±1/2°

DRAWING TITLE:  
**COAXIAL ISOLATOR**

PART NO.  
**IS-11**



CAGE CODE: OD2L5	SIZE: N/A	REV: N/A	DWG NO. 82102
DO NOT SCALE THE DRAWING			