



### ROTARY KNOB MANUAL CONTROL STEP ATTENUATOR (DC-5GHZ 10DB RANGE)

#### Product description



- Very small package and broadband performance
- Continuous variable attenuation during operation
- Excellent Repeatability and Long Life Switch
- Low Deviation from Nominal Value
- 50Ω impedance standard upon request
- Higher average power available upon request
- Custom Configurations Available Upon Request.



#### Applications:

Include Communication, 3G, Digital Transmission, Radar, Military, Broadcast & Television, science & Research department etc.

Part Number	Frequency	Power (Watts)	Attenuation Range (dB)	Attenuation Step (dB)	VSWR max.	Insertion Loss (dB)	Accuracy (dB)
RKT2G5A10	DC-5.0GHz	2	10	1	1.60	<0.70	± 0.50

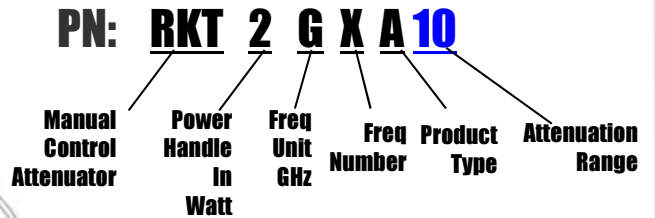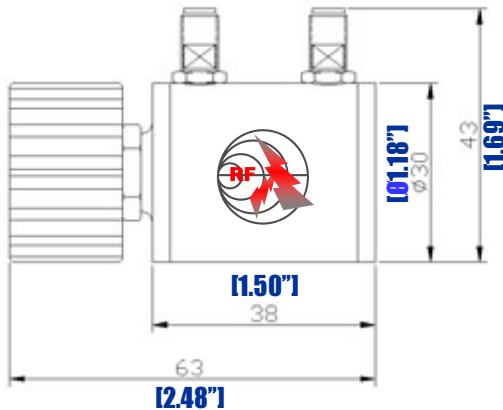

Connector: SMA type, weight: 250g

Temperature (Operational): -10° C~+50° C (Storage) -40° C~+70° C

MANUAL CONTROL ROTARY ATTENUATOR (DC-5GHZ 10DB RANGE)




# RF-LAMBDA

The power beyond expectations

## RKT2G5A10

MANUAL CONTROL ROTARY ATTENUATOR (DC-5GHz 100B RANGE)

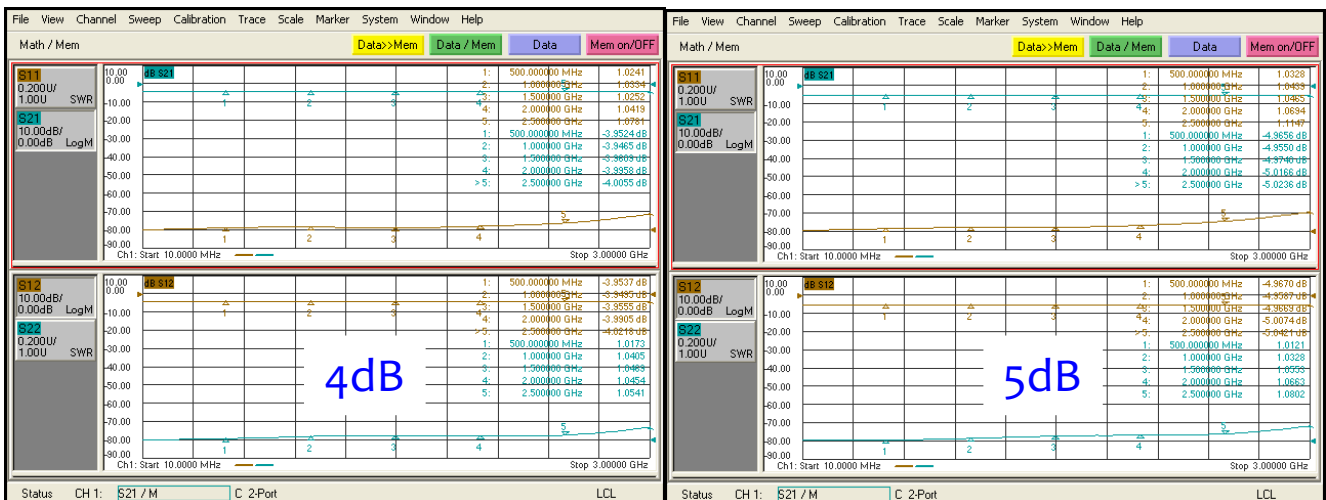



# RF-LAMBDA

The power beyond expectations

## RKT2G5A10

MANUAL CONTROL ROTARY ATTENUATOR (DC-5GHz 100B RANGE)

