


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

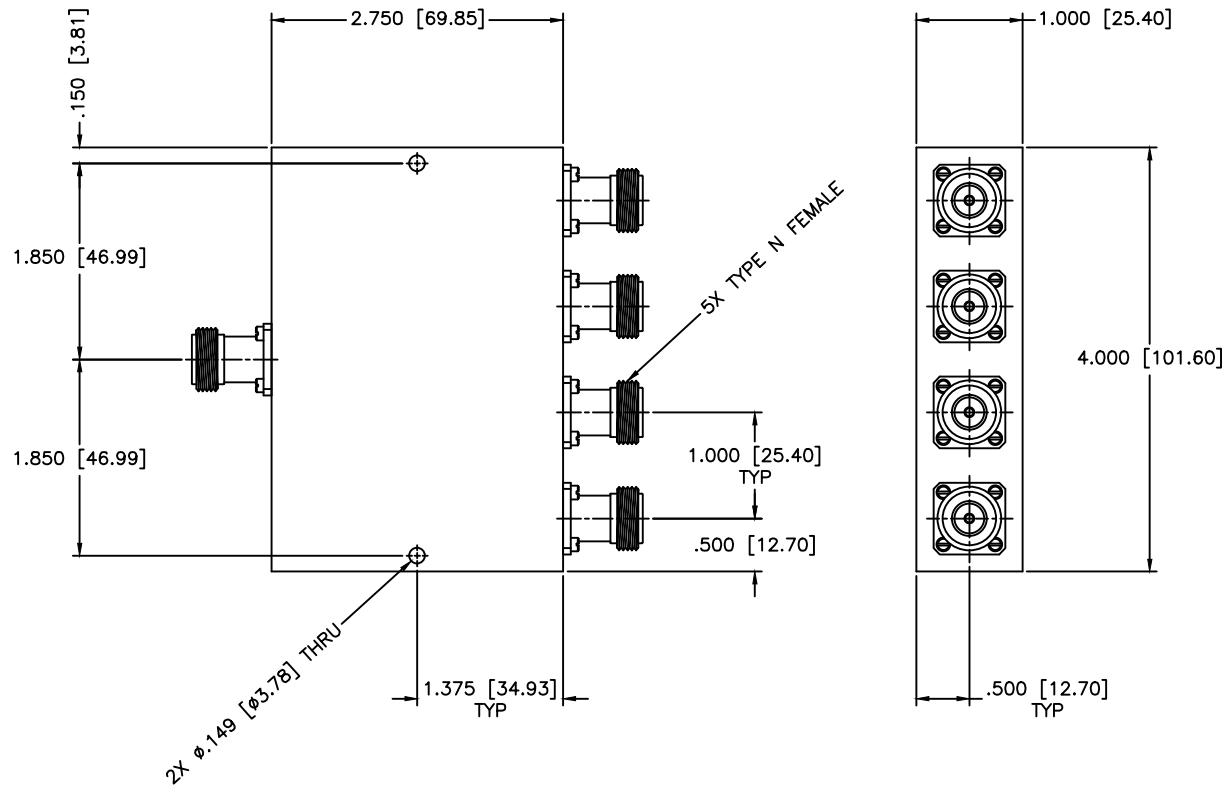

SPECIFICATIONS

Frequency Range: 0.5–2.0 GHz
 Insertion Loss: 1.3dB Max.
 Isolation: 17dB Min.
 VSWR In/Out: 1.60:1/1.50:1 Max.
 Phase Balance: ±5 Deg. Max.
 Amplitude Balance: ±0.4dB Max.
 Power: 30W (Load vswr@1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE: 4-WAY POWER DIVIDER		SHEET: N/A
PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		PART NO.: PS4-34/NF			
DRAWN: Paiboon Luexhamhan	DATE: 08-10-1999	CAGE CODE: OD2L5	SIZE: N/A	REV: N/A	DWG NO.: 81901
APPROVED: T. Nguyen	DATE: 08-10-1999	DO NOT SCALE THE DRAWING			