


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

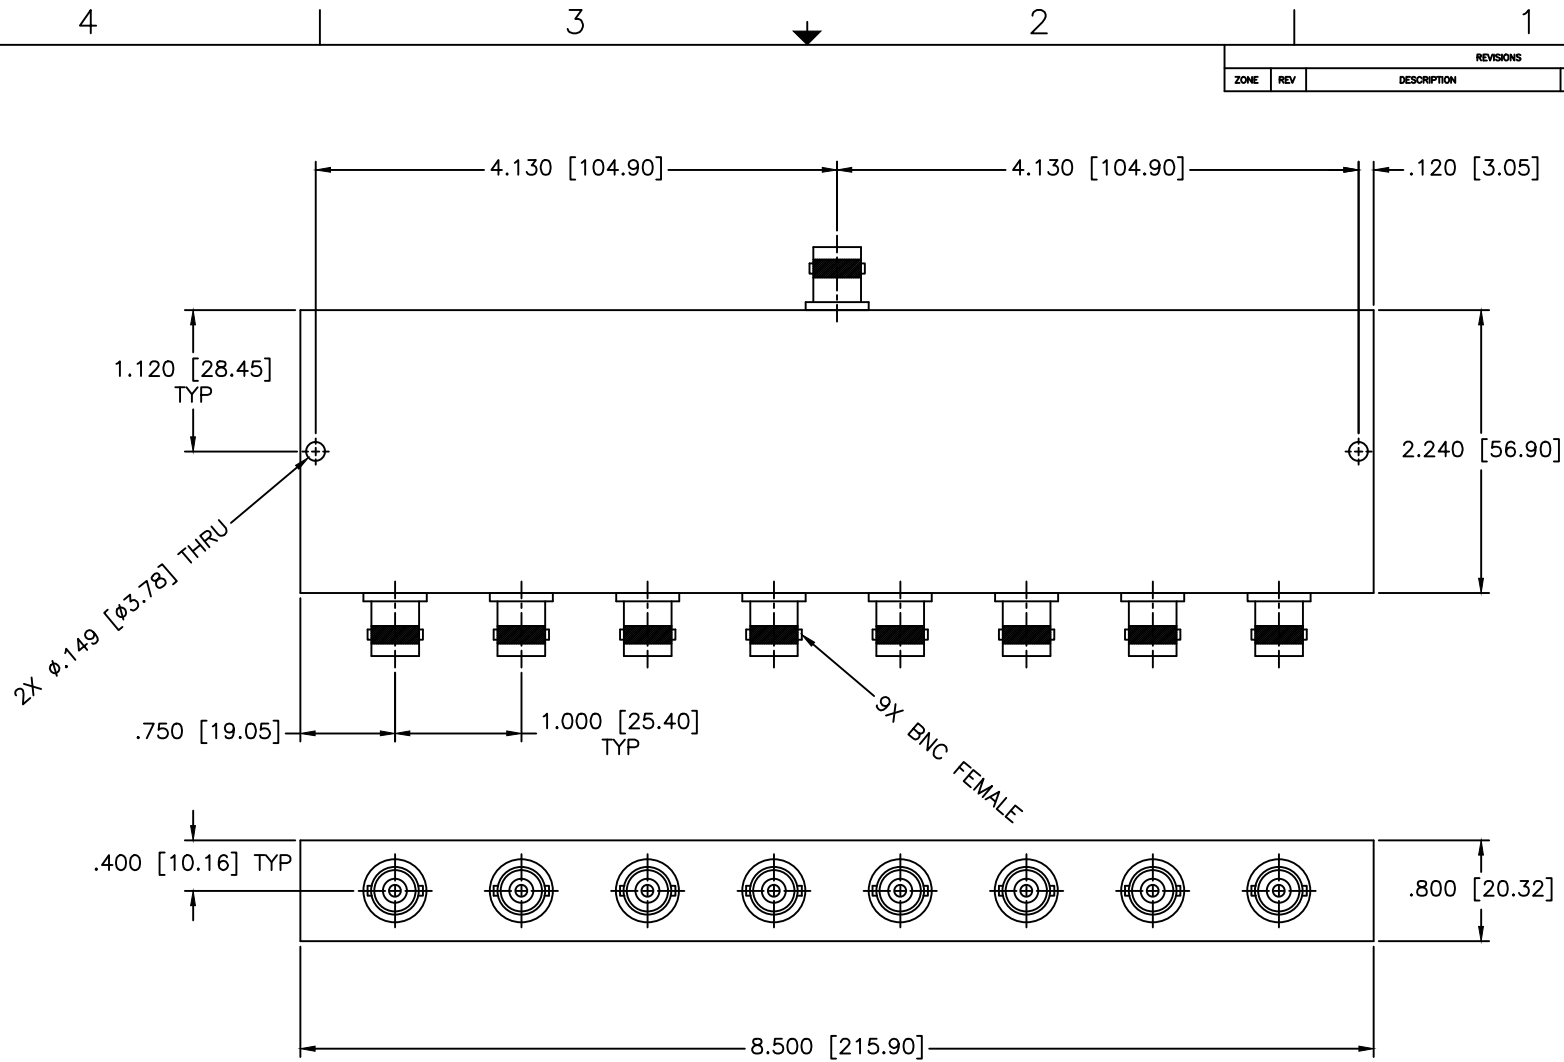

SPECIFICATIONS

Frequency Range: 950–1750 MHz
 Insertion Loss: 0.9dB Max.
 Isolation: 16dB Min.
 VSWR: 1.50:1 Max.
 Amplitude Balance: ±0.8dB Max.
 Phase Balance: ±12 Deg. Max.
 Impedance: 75 Ohms

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-6116 http://www.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE:	8-WAY POWER DIVIDER	
DRAWN: Paiboon Luekhamhan		DATE: 03-28-1998	PART NO. PM8-41-75/BF	
APPROVED: T. Nguyen		DATE: 03-28-1998	CAGE CODE: 0D2L5	SIZE: N/A
		PERMANENT NOTICE: THE INFORMATION ON THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	REV: A	DWG NO. 81106
		THIRD ANGLE PROJECTION	DO NOT SCALE THE DRAWING	