


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

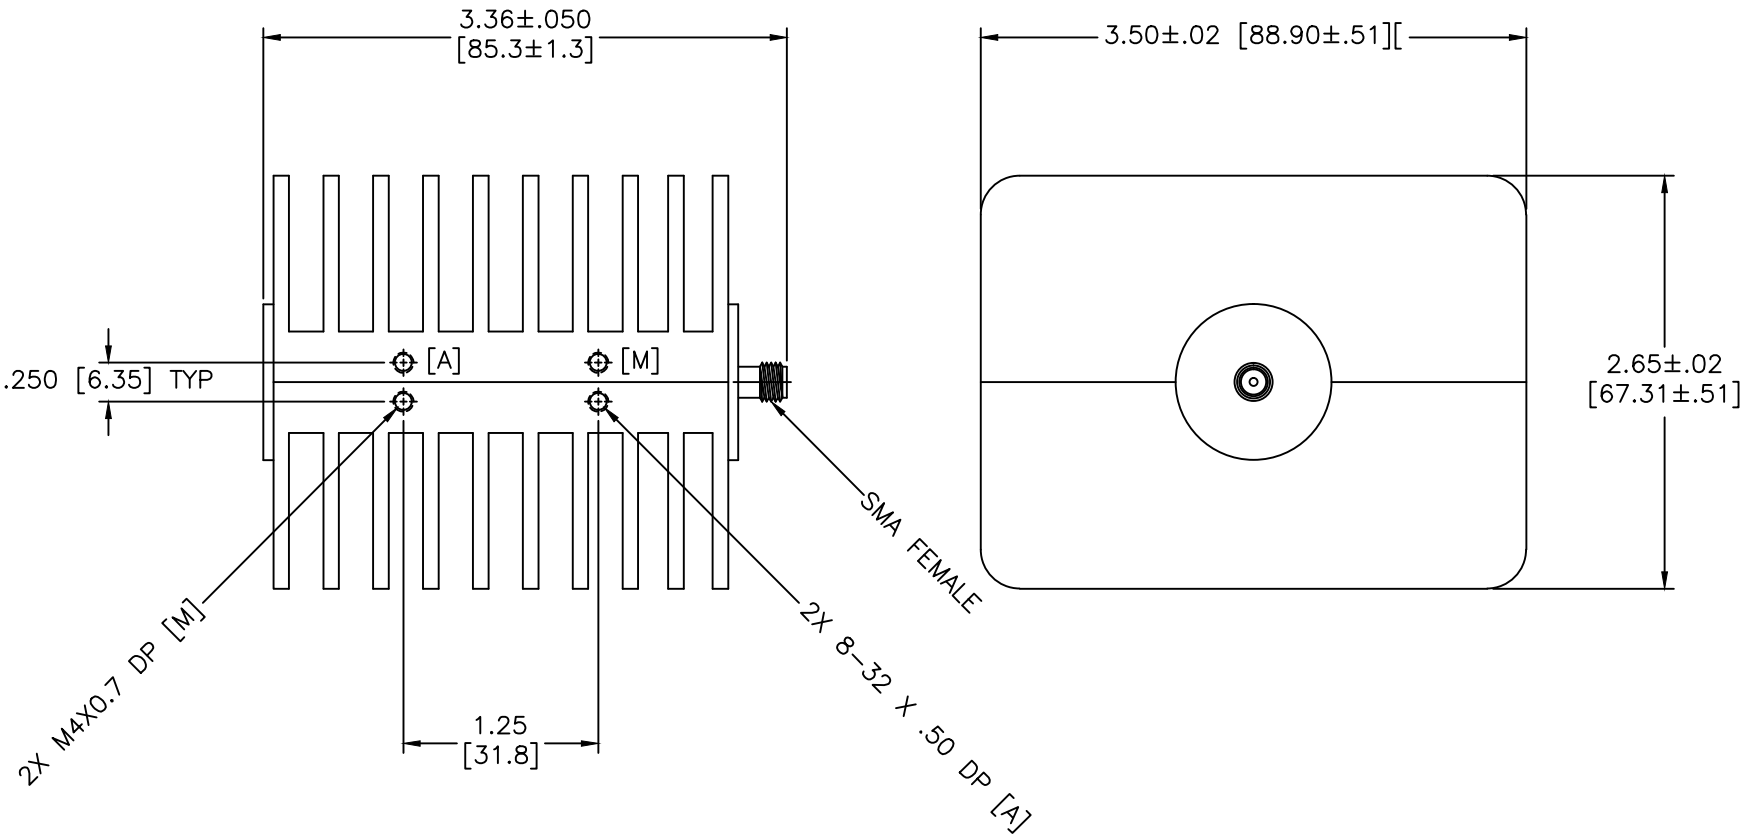

SPECIFICATIONS	
FREQUENCY RANGE	DC-6 GHz
VSWR	Max.
DC-6 GHz	1.25:1
IMPEDANCE	50 Ohms
INPUT POWER	50 Watts Avg @ +25°C
	Derated Linearly to 10 Watts @ +125°C
PEAK POWER	500 Watts Max.
OPERATING TEMP. RANGE	-65°C to +125°C

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°	DRAWING TITLE:		TERMINATION-OUTLINE DRAWING	
DRAWN:		DATE:		PART NO.:		TSF-17	
Paiboon Luexhamhan		02-22-2006		CAGE CODE:		82500	
APPROVED:		DATE:		SIZE:		REV:	
T. Nguyen		02-22-2006		N/A		N/A	
		PRECEDENCE NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		DO NOT SCALE THE DRAWING			
				OD2L5			