


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

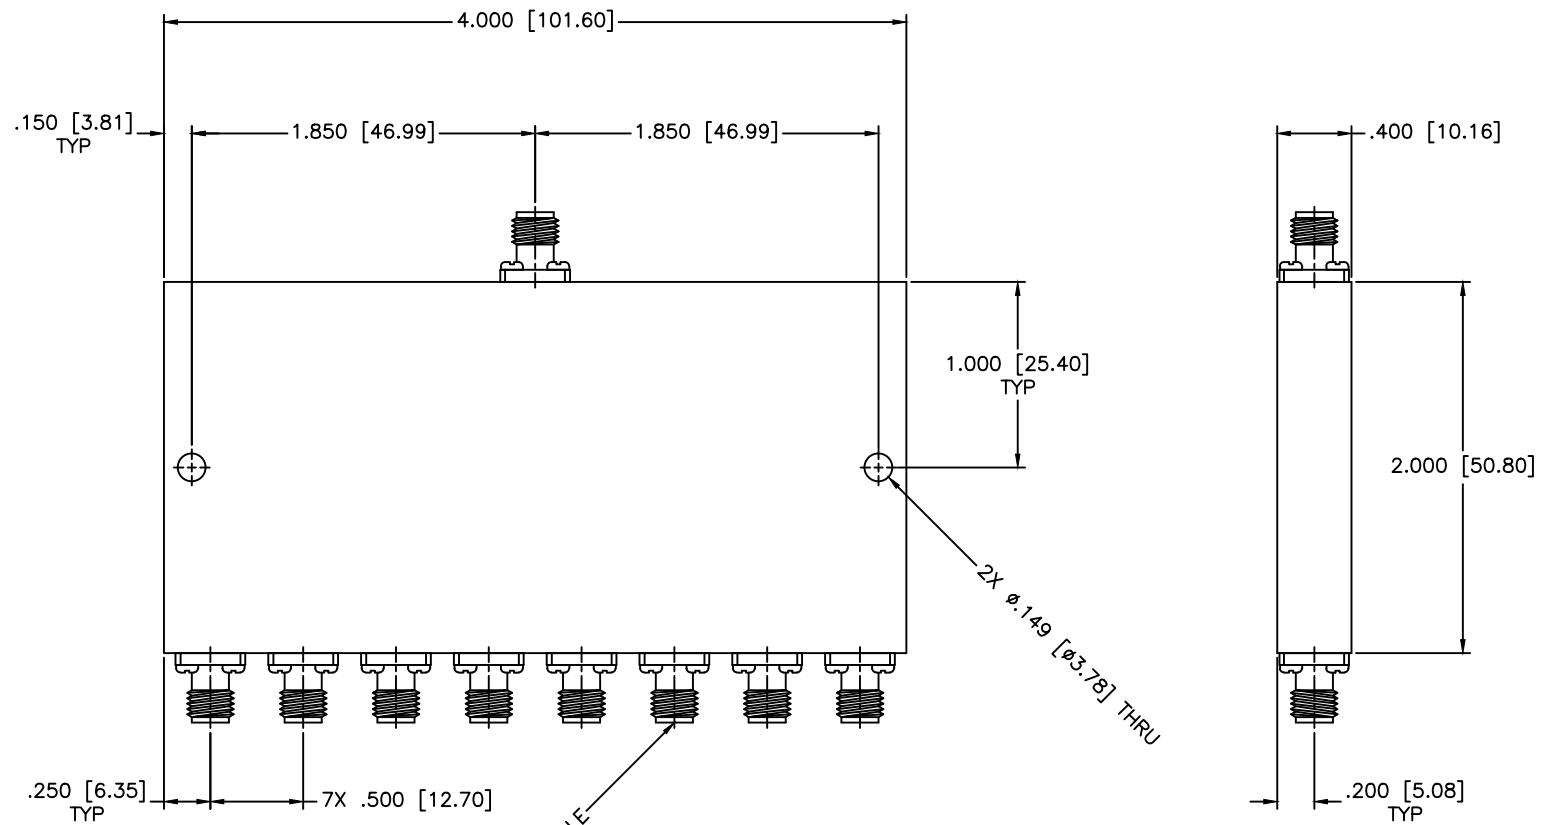

**SPECIFICATIONS**

Frequency Range: 2–4 GHz  
 Isolation: 18dB Min.  
 VSWR In/Out: 1.45:1/1.35:1 Max.  
 Insertion Loss: 1.2dB Max.  
 Amplitude Balance: ±0.4dB Max.  
 Phase Balance: ±8° Max.  
 Power: 30W @ 1.2 VSWR load

9X SMA FEMALE

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A	
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°			DRAWING TITLE:		SHEET:		N/A
DRAWN:		PART NO.		DRAWING TITLE:			8-WAY POWER DIVIDER
DATE:		CAGE CODE:		PART NO.			PS8-4
APPROVED:		DATE:		SIZE:	REV:	DWG NO.	
T. Nguyen		11-01-1997		A	N/A	80244	
THIRD ANGLE PROJECTION		OD2L5		DO NOT SCALE THE DRAWING			