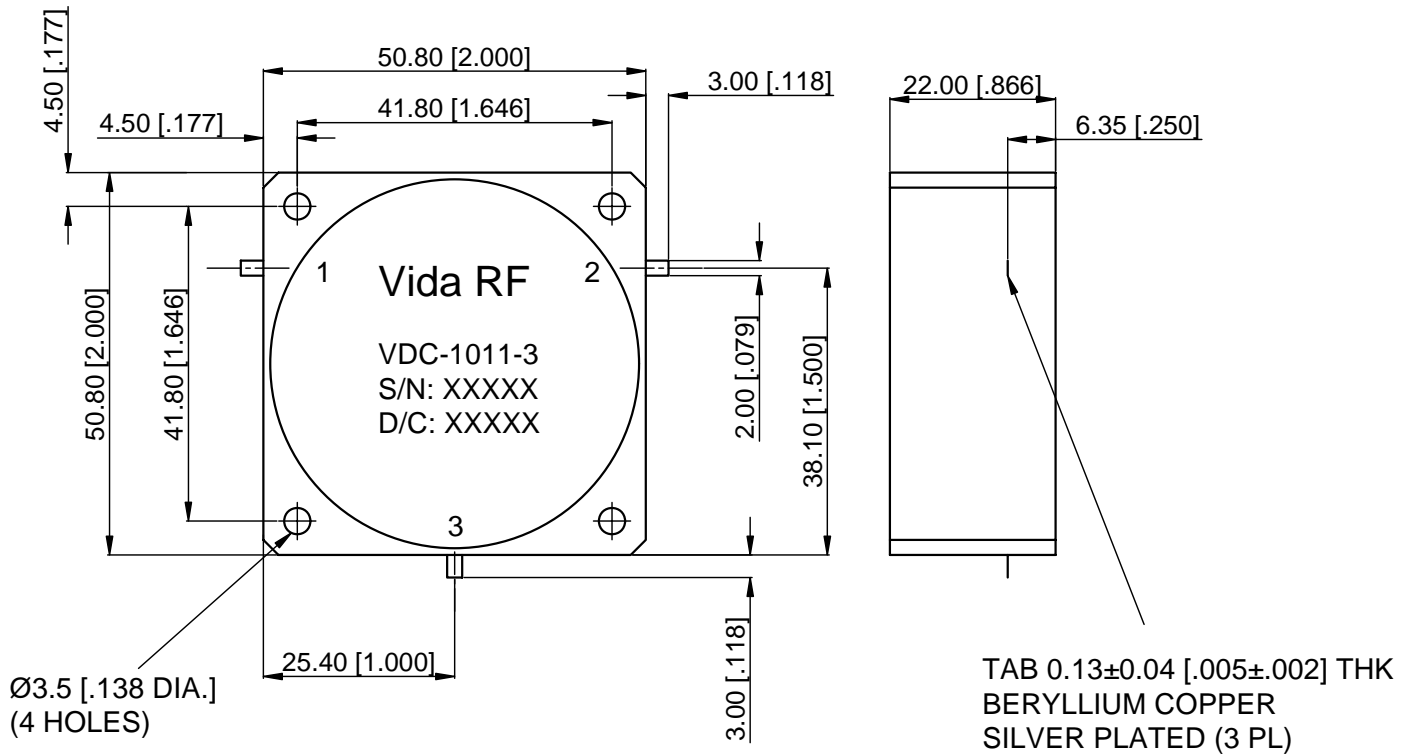




Drop-in Circulator

ELECTRICAL SPECIFICATION

Product Model:	VDC-1011-3
Frequency Range (GHz):	1.01-1.10
Isolation ( dB ) min:	22
Insertion Loss ( dB ) max:	0.15
VSWR max:	1.30
Power Average (W)	350
Peck Power ( W)	5000
Harmonics output ( dBC)	40
Operating Temp. Range ( °C):	-40~+80



				Drawn: TP 06/04/12	Title: <b>Drop-in Circulator</b>					
				Checked: DR 06/04/12						
Description				Approved: SK 06/04/12						
				Cage Code <b>6KQ83</b>	Part No: <b>VDC-1011-3</b>					
 Tel: 877-777-8432 www.vidaRF.com				Unless otherwise specified dimensions are in millimeters, dimensions in [ ] are in inches for customer reference only. Unless Otherwise Specified tolerance are: .XX ±0.13 [.005"] .X ±0.20 [.008"] X ±0.50 [.019"] .X° ±1° X° ±2°		View: 	Size: A4	Scale: 2:1	Sheet: 1/1	Rev: A