


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

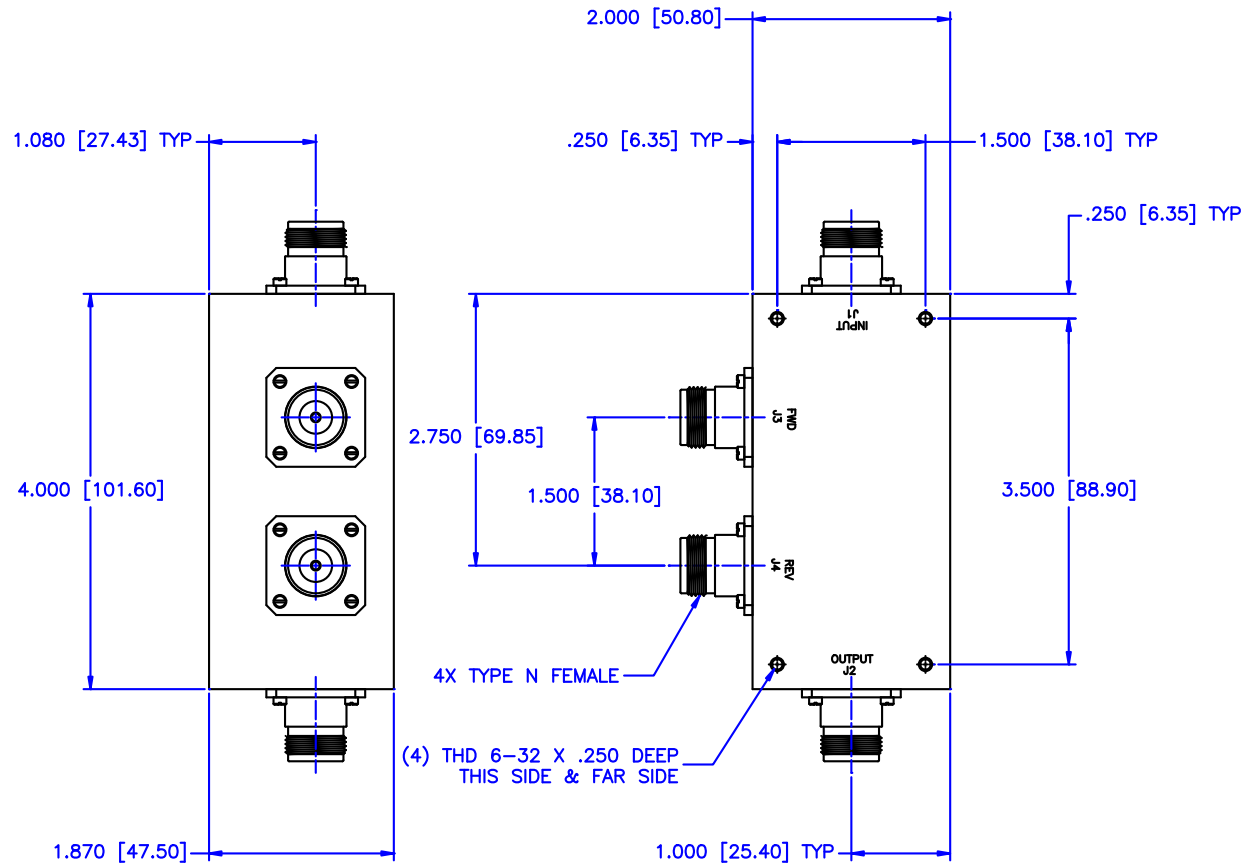

SPECIFICATIONS

- FREQUENCY RANGE: 20–100 MHz
- FLATNESS: ± 0.50 dB Max.
- INSERTION LOSS: 0.2dB Max.
- DIRECTIVITY: 25dB Min.
- VSWR PRIME LINE: 1.15:1 Max.
- POWER: 750 Watts

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE: N/A
			SHEET: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: HIGH POWER DUAL DIRECTIONAL COUPLER	
DRAWN: Paiboon Luekhamhan		PART NO.: HDL-12-30	
DATE: 03-27-1999		CAGE CODE: OD2L5	
APPROVED: T. Nguyen		DATE: 03-27-1999	
THIRD ANGLE PROJECTION		SIZE: C	REV: N/A
		DWG NO.: 81244	
DO NOT SCALE THE DRAWING			