





### Wide Band Power Divider

# 800MHz-2000MHz 10-Way 50Ω Power Divider

- Very small package
- Excellent phase and amplitude balance
- Bi-Directional as divider and combiner \*
- Low Insertion loss and high isolation
- Standard: MIL E-5400, MIL E-16400
- 10W forward power handling capability
- \* 2W maximum input when work as combiner.

Frequency Range (MHz)	Insertion Loss (dB)		Isolation (dB)			Phase Unbalance (degree)			Amplitude Unbalance (dB)		
	L	U	L	M	U	L	M	U	L	M	U
	TypMax	TypMax	TypMin	TypMin	TypMin	TypMax	TypMax	TypMax	TypMax	TypMax	TypMax
800-2000	1.5	1.5	18	18	18	5	5	5	0.8	0.8	0.8

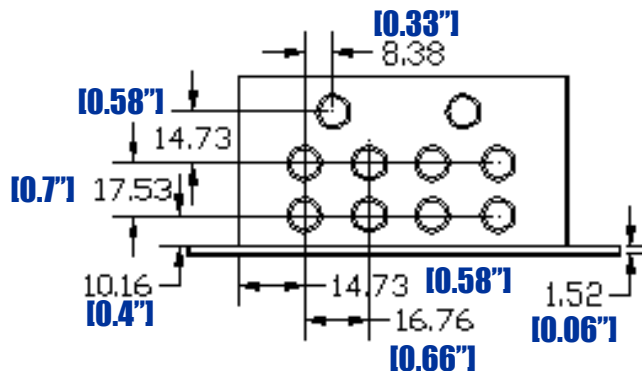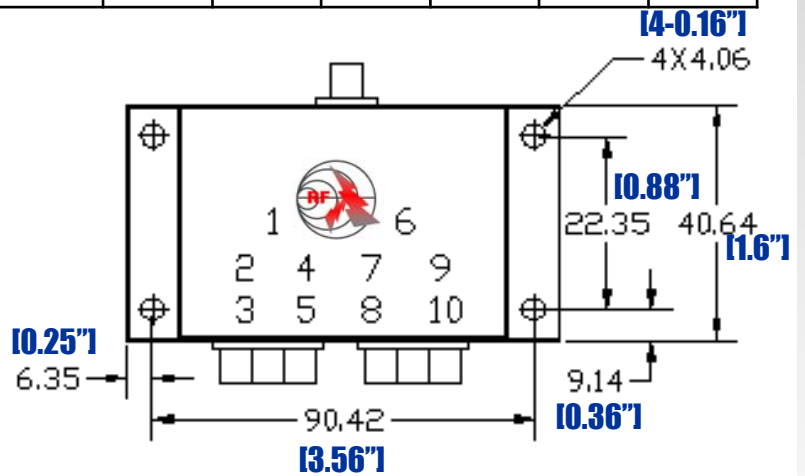

- Notes:**
1. Case material: Aluminum alloy with Nickel-plating.
  2. Connector: N/SMA/BNC/TNC...
  3. Temperature -40° C ~ +85° C

800MHz-2000MHz 10-Way Power Divider