


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

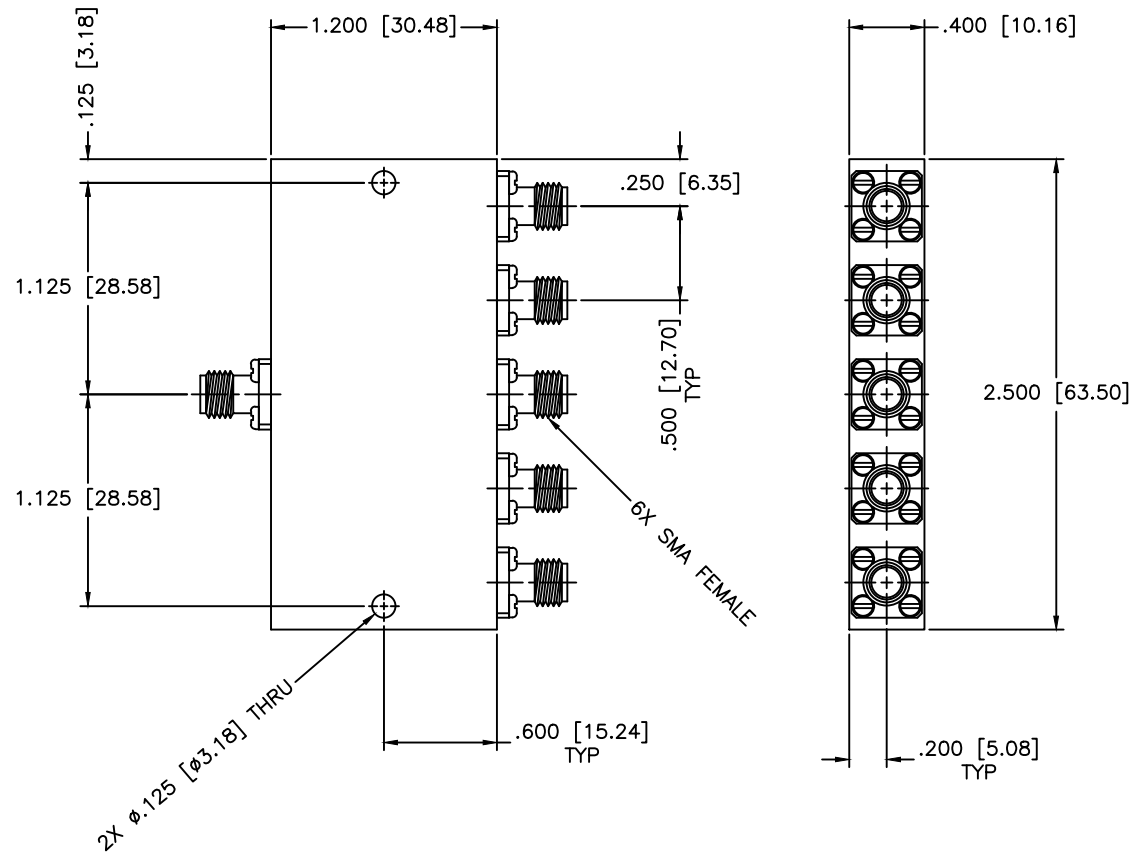

SPECIFICATIONS

Frequency Range: 18–26.5 GHz
 Insertion Loss: 5.6dB Max.
 Isolation: 9dB Min.
 VSWR: 2.00:1 Max.
 Amplitude Balance: ±2.5dB Max.
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL:	
DRAWN:	DATE:
Paiboon Luekhamhan	08-11-2003
APPROVED:	DATE:
T. Nguyen	08-11-2003



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

DRAWING TITLE:
5-WAY POWER DIVIDER

PART NO.
PS5-12

PROPRIETARY NOTES:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

CAGE CODE:	SIZE:	REV:	DWG NO.
0D2L5	A	N/A	82001
DO NOT SCALE THE DRAWING			

