REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
NC	INITIAL RELEASE		

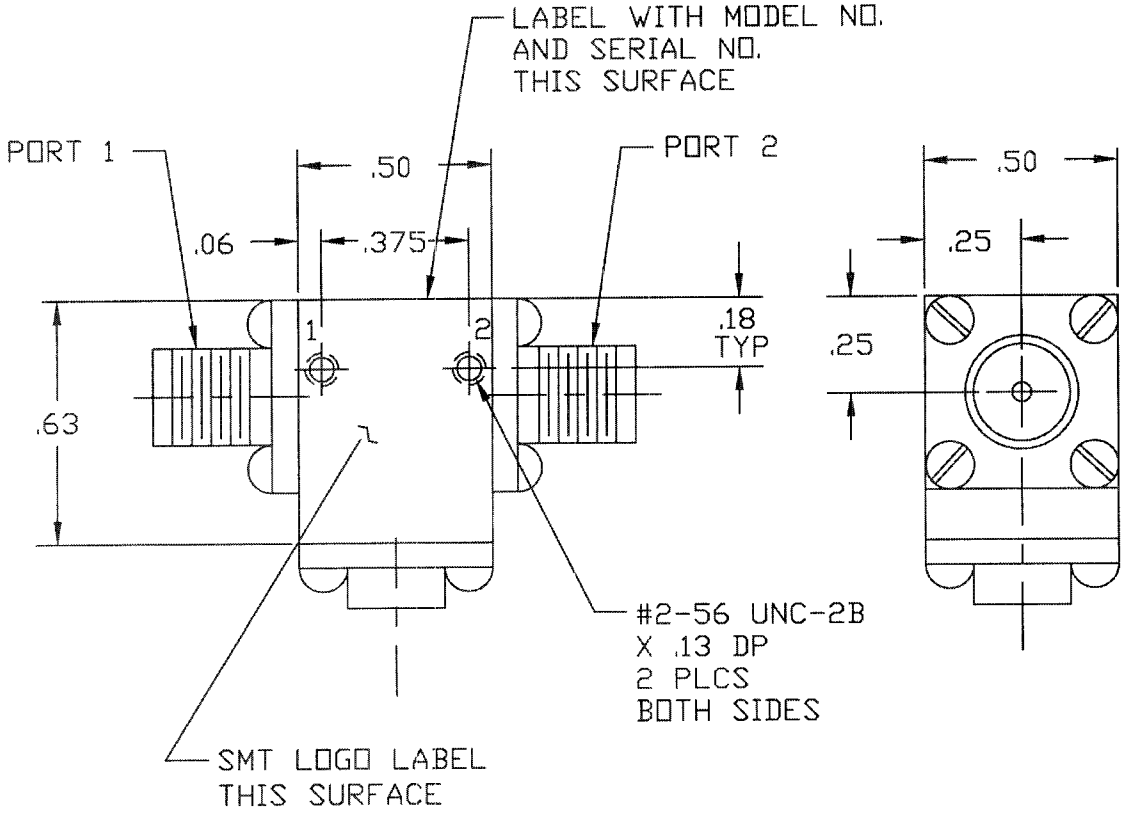

SPECIFICATIONS

FREQUENCY RANGE:	5.0 TO 6.0 GHz
VSWR:	1.25:1 MAX
ISOLATION:	23 dB MIN
INSERTION LOSS:	0.4 dB MAX
TEMPERATURE:	
OPERATING:	-20°C TO +65°C
STORAGE:	-54°C TO +100°C

CONNECTOR ORIENTATION			
DASH NO.	PORT 1	PORT 2	PORT 3
NONE	SMA FEMALE	SMA FEMALE	TERMINATED
-1	SMA MALE	SMA FEMALE	TERMINATED
-2	SMA FEMALE	SMA MALE	TERMINATED
-3	SMA MALE	SMA MALE	TERMINATED

PART DRAWN IS SMI5060 -- NO DASH NUMBER

QTY REQD	FSCM NO.	PART OR IDENTIFING NO.	NOMENCLATURE OR DESCRIPTION	MATERIAL SPECIFICATION

PARTS LIST

204-0322-001	SMI5060-1&2
NEXT ASSY	USED ON
APPLICATION	

FRACTIONS ± DECIMALS .XX± .02 .XXX± .010 ANGLES ±

MATERIAL

FINISH

APPROVALS	DATE
DRAWN	
CHECKED	
ISSUED	

SIERRA MICROWAVE TECHNOLOGY

OUTLINE FOR SMI5060-X

SIZE	FSCM NO.	DWG. NO.	REV.
B	1CY63	205-2521-001	

SCALE SHEET