

Model 1425 Medium Power, N Connectors

dc to 12.4 GHz
10 Watts

RoHS



Features

- /// **Quality Connectors** - Choice of male or female N connector that mate nondestructively with connector manufactured in accordance with MIL-C-39012.
- /// **Rugged Construction.**


Specifications

NOMINAL IMPEDANCE: 50 Ω

FREQUENCY RANGE: dc to 12.4 GHz

MAXIMUM SWR:

Frequency (GHz)	SWR
dc - 2	1.03
2 - 4	1.05
4 - 8	1.15
8 - 12.4	1.30

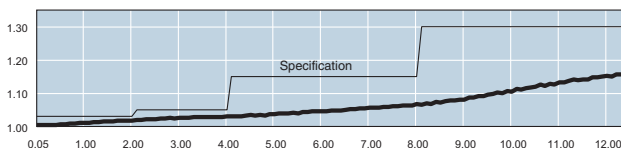

Typical 1425-4 SWR Performance

POWER RATING: 10 watts **average (mounted horizontally)** @ 25°C ambient temperature, derated linearly to 0 watts @ 125°C. 1 kilowatt **peak** (5 μsec pulse width; 0.5% duty cycle).

TEMPERATURE RANGE: -55°C to +125°C

TEST DATA: Swept data plots of SWR from 50 MHz to 12.4 GHz is available at additional cost.


CONNECTOR: Type N connector per MIL-STD-348 interface dimensions - mate nondestructively with MIL-C-39012 connector.

Connector Options	Type/Description
3	Type N, Female
4	Type N, Male

CONSTRUCTION: Black, finned aluminum body, stainless steel connector; gold plated beryllium copper contacts

WEIGHT: Net 110 g (4 oz)

PHYSICAL DIMENSIONS:

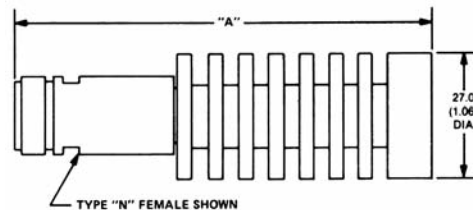

Model #	DIM A	Connector Type
1425-4	84.58 (3.33)	N, male
1425-3	86.36 (3.40)	N, female

NOTE: All dimensions are given in mm (inches) and are maximum, unless otherwise specified.