


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

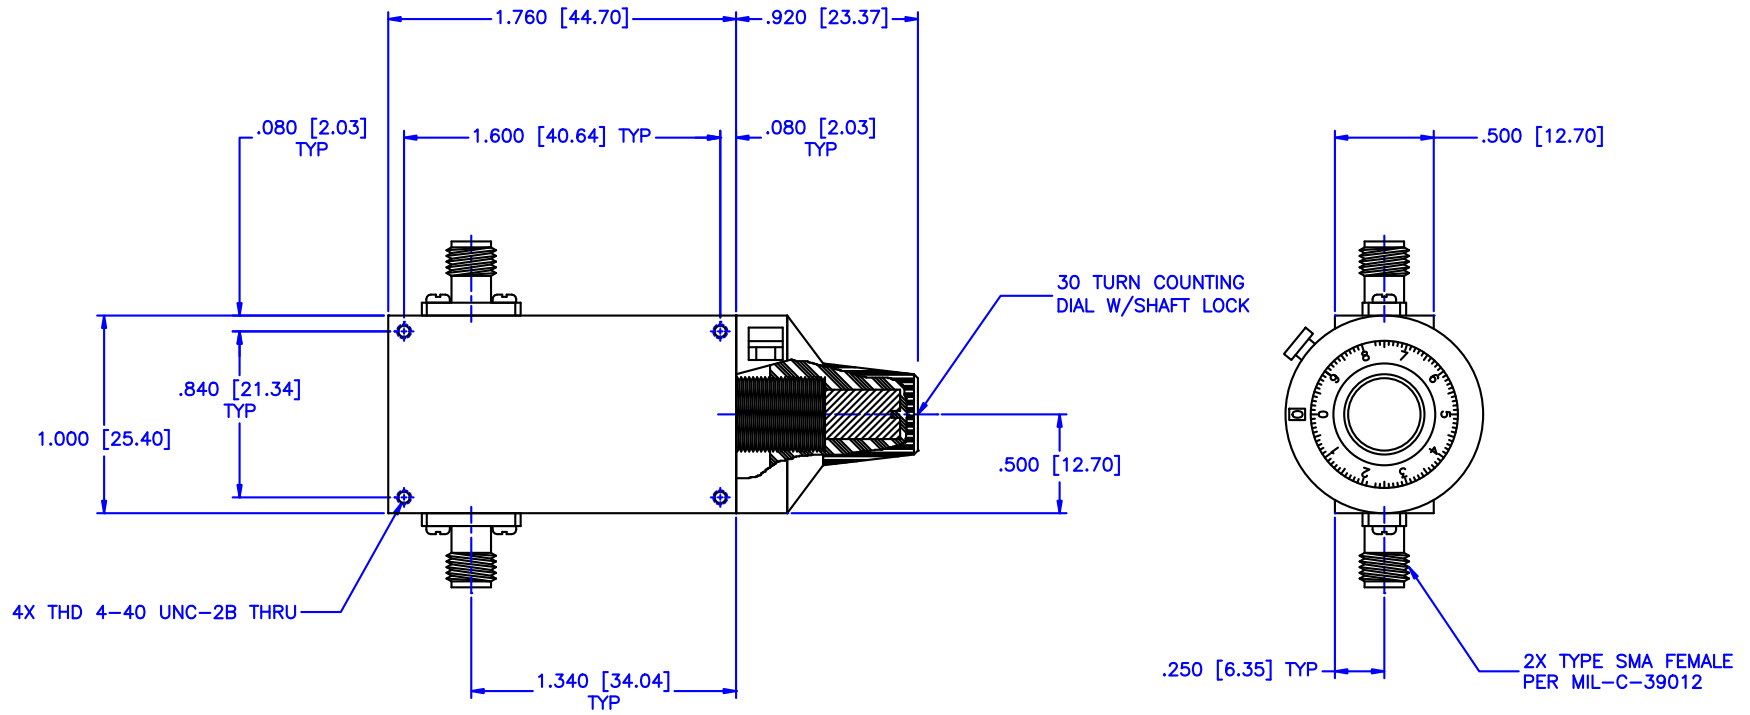

Specifications:

Frequency Range: 14–26.5 GHz
 Attenuation: 30dB
 Insertion Loss: 0.75dB Max.
 VSWR: 1.70:1 Max.
 RF Power: 7W Average / 3kW Peak

Environmental

Temperature range: -55°C to +110°C
 Shock: 15 G's, 11mS, 1/2 sine
 Vibration: 3 G's overall
 Altitude: 40,000 ft. Survival 25,000ft Operating

* Dial option units include wrench kit

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± 0.015 ANGLE: ± 1/2°			DRAWING TITLE: CONTINUOUSLY VARIABLE ATTENUATOR WITH DIAL		SHEET:	N/A
DRAWN: Paiboon Luekhamhan		DATE: 02-08-2011		PART NO. CVA14-30/D		
APPROVED: T. Nguyen		DATE: 02-08-2011		CAGE CODE: OD2L5	SIZE: A	REV: N/A
THIRD ANGLE PROJECTION				DWG NO. 85444		DO NOT SCALE THE DRAWING