


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

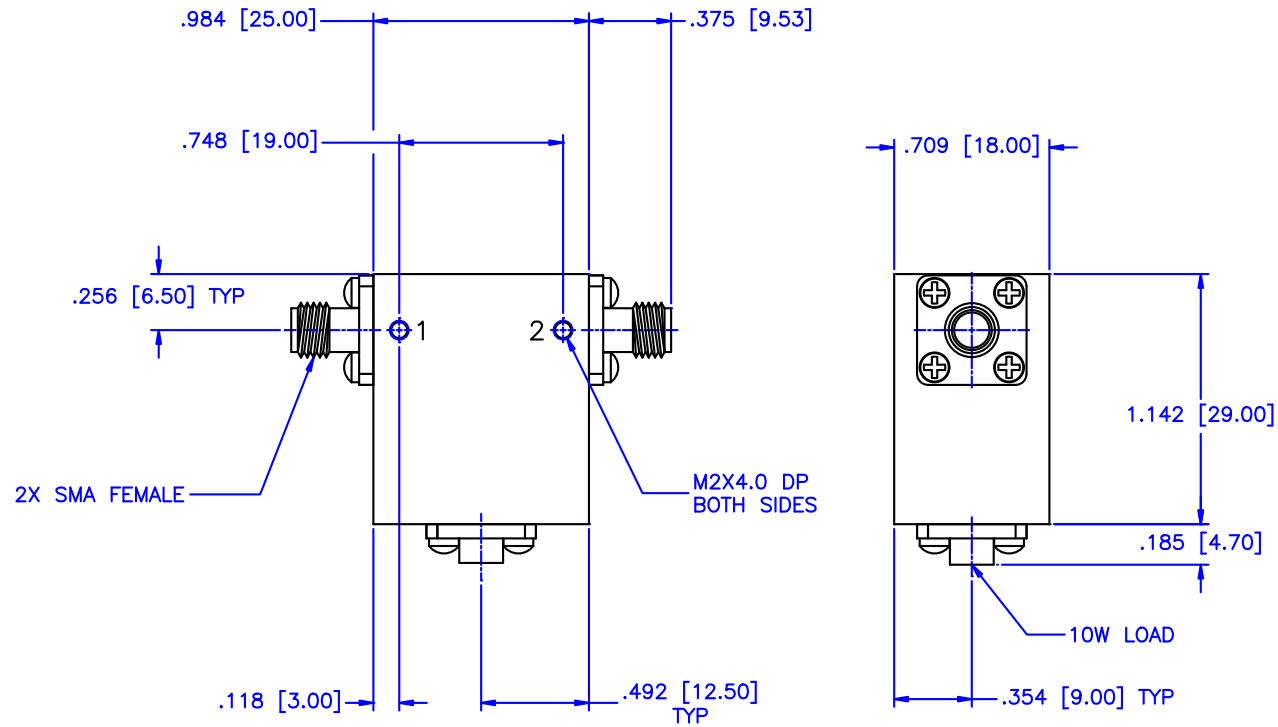

**SPECIFICATIONS**

- Frequency Range: 3.5–10.5 GHz
- Isolation: 14dB Min.
- Insertion loss: 0.80dB Max.
- VSWR: 1.50:1 Max.
- Operating Temperature: -20°C to +65°C
- Forward Power: 20 Watts
- Reverse Power: 10 Watts

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE:	N/A
			UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET:	N/A
DRAWN:		DATE:	DRAWING TITLE:			
Paiboon Luekhamhan		03-22-2011	COAXIAL ISOLATOR			
APPROVED:		DATE:	PART NO.			
T. Nguyen		03-22-2011	IS-190			
PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)		CAGE CODE:		SIZE:	REV:	DWG NO.
THIRD ANGLE PROJECTION		OD2L5		N/A	N/A	86176
DO NOT SCALE THE DRAWING						