

Fixed Coaxial Attenuators



Model 86 Medium Power, 3.5mm Connectors Conduction Cooled, Bi-directional Design


dc to 22.0 GHz
50 Watts



CONSTRUCTION: Aluminum body, stainless steel connectors; gold plated beryllium copper contacts.

WEIGHT: 60 g (2.1 oz.) maximum

PHYSICAL DIMENSIONS:

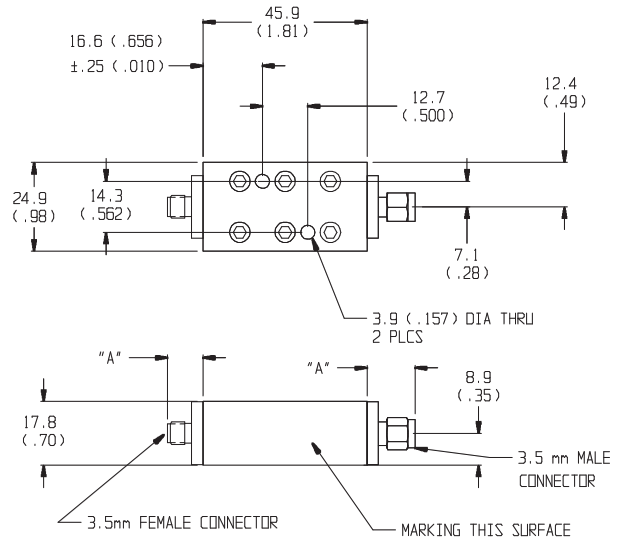

Features

- /// **Compact Construction** - Lowest size/power ratio.
- /// **Precision Injection Molded Connectors.**
- /// **Designed to meet environmental requirements of MIL-DTL-3933.**
- /// **Ideal for Airborne or Space Applications.**

Specifications

NOMINAL IMPEDANCE: 50 Ω
FREQUENCY RANGE: dc to 22.0 GHz

MAXIMUM DEVIATION OVER FREQUENCY:

Nominal ATTN (dB)	Deviation (dB)
3, 6, 10, 20, 30	± 0.80

MAXIMUM SWR: 1.30

POWER RATING 50 watts **average (bi-directional)**, 1 kilowatts **peak** (5 μsec pulse width; 2.5 % duty cycle) with case temperature held within **90°C maximum** with appropriate conductive heat sink.

POWER COEFFICIENT: <0.0003 dB/dB/watt

TEMPERATURE COEFFICIENT: <0.0004 dB/dB/°C

TEMPERATURE RANGE: -55°C to 90°C (case)

TEST DATA: Swept data plots of attenuation and SWR from 50 MHz to 22 GHz.

CONNECTORS: 3.5mm connectors - mate nondestructively with SMA per MIL-C-39012, 2.92mm and other 3.5mm connectors.


Options	Description
1	3.5mm Female
2	3.5mm Male

Connector	DIM A
3.5mm Male	13.4±0.5 (0.53±0.02)
3.5mm Female	9.9±0.5 (0.32±0.02)

NOTE: All dimensions are given in mm (inches) and are nominal, unless otherwise specified.

MODEL NUMBER DESCRIPTION:

Example:

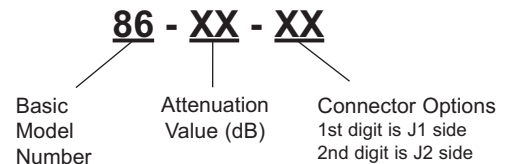

*Unit is bi-directional and full power may be applied to either J1 or J2.