


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

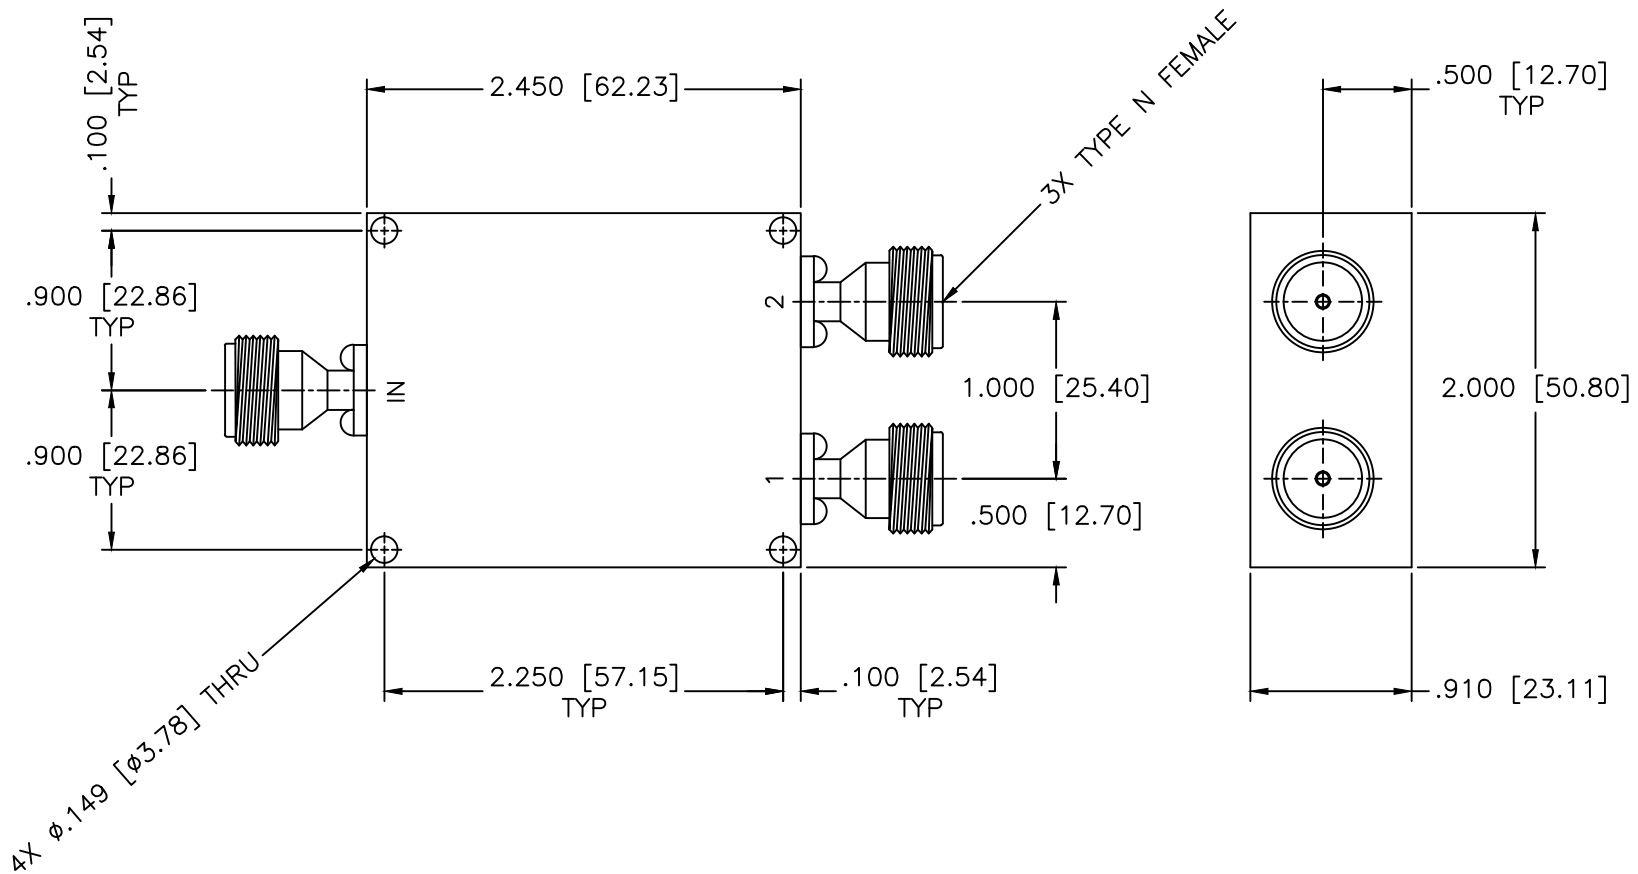

SPECIFICATIONS

Frequency Range: 20–500 MHz
 Insertion Loss: 0.3dB Max.
 Isolation: 20dB Min.
 Phase Balance: ±3 Deg. Max.
 Amplitude Balance: ±0.2dB Max.
 VSWR: 1.30:1 Max.
 Input Power: 100 W CW

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±0.01 ±0.005 ANGLE: ±1/2°	DRAWING TITLE: 2-WAY POWER DIVIDER	
		PROPERTY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR REPRODUCED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	PART NO. PLH2-23-100/NF	
DRAWN: Paiboon Luekhamhan	DATE: 03-30-2012	THIRD ANGLE PROJECTION	CAGE CODE:	OD2L5
APPROVED: T. Nguyen	DATE: 03-30-2012		SIZE: A	REV: N/A
			DO NOT SCALE THE DRAWING	