

Product Features

- GaN Broadband Power Amplifier
- 20 ~ 1000MHz Operation Bandwidth
- Small Signal Gain 34dB min.
- 20W Typical. P3dB

Applications

- Broadcasting
- Medical equipment
- General Purpose

**Description**

The power amplifier module is designed for Broadcasting, Telecommunication, Medical and Other markets.

The operating frequency range is from 20 ~ 1000MHz.

Gallium Nitride on SiC technology is used and attached to an aluminum sub carrier. Full in/out matching for broadband performance is already applied.

Improved thermal handling by patented technology.

Electrical Specifications @ $V_{CC} = 28V$; $T = 25^{\circ}C$; $Z_S = Z_L = 50\Omega$

PARAMETER	UNIT	MIN	TYP	MAX	CONDITION
Operating Frequency	MHz	20	-	1000	-
Small Signal Gain	dB	34	36	38	-
Gain Variation vs Temperature	dB	-2	-	2	-20 ~ 60°C
Gain Variation vs Frequency	dBpp	-	± 1	± 1.5	-
P_3dB	dBm	42	44	-	20 ~ 500 MHz
		41	43	-	500 ~ 1000 MHz
OIP3 @ $P_o = +33dBm$ (1MHz Tone spacing, CW 2-Tone)	dBm	48	51	-	20 ~ 500 MHz
		45	48	-	500 ~ 1000 MHz
Input Return Loss	dB	-	-10	-6	-
N^{TH} Harmonic suppression	dBc	15	25	-	CW 1-tone @ $P_o = +40dBm$
Supply Voltage	V	27.5	28	30	$V_{CC} (=V_{ds})$
Quiescent Current consumption	mA	-	1.7	1.9	-
Current Consumption @ P_3dB	A	-	2.3	3	CW 1-tone

Absolute Maximum Ratings

PARAMETER	UNIT	RATING
Operating Case Temperature	°C	80
Input RF Power	dBm	14
Supply Voltage	V	30
Load Mismatch Value	-	3 : 1 @ all load phase

Note

Input Signal Condition : CW 1-tone.

For more information, please contact RFHIC.

Environmental Characteristics

PARAMETER	UNIT	MIN	TYP	MAX
Operating Temperature	°C	-20	-	60
Storage Temperature	°C	-40	-	105
Vibration	MIL-STD-810G Method 514.6 ANNEX C			

Typical Performance @ 25°C


Frequency (MHz)	P1dB (dBm)	P3dB (dBm)	Current@P1dB (A)	Current@P3dB (A)	N TH Harmonic @ 40dBm (dBc)		OIP3 @30dBm/Tone (dBm)
					2 nd Harm	3 rd Harm	
20	41.0	43.1	1.8	2.0	35.4	26.9	53.0
100	41.8	44.3	1.9	2.3	45.8	25.8	53.2
200	40.8	44.2	1.9	2.5	43.1	22.5	52.0
300	40.1	43.8	1.9	2.4	41.7	20.1	50.7
400	41.2	44.4	1.8	2.4	44.8	26.8	51.0
500	41.7	44.2	1.8	2.3	34.7	29.6	50.8
600	41.3	43.3	1.7	2.0	33.3	27.7	49.4
700	41.0	42.9	1.6	1.9	35.1	28.2	48.6
800	40.7	42.4	1.7	1.9	36.3	40.4	48.0
900	40.2	42.4	1.7	2.0	36.9	47.5	47.6
1000	39.3	41.6	1.7	2.0	35.9	52.1	46.3

Precautions

- This product is designed to be used for broadband amplification.
Heat generation is higher when there is no RF signal in the device.
Therefore, the worst case scenario is when there is no RF signal, and the amplifier is “on” with current draw.
The temperature must be calculated properly.
Case temperature must be maintained below 80°C.
- Thermal Grease or Metal Thermal Interface Materials are recommended for heat dissipation.
An example would be spreading thermal grease on the bottom of the device.

Package Dimensions

* Unit: mm[inch] | Tolerance: ± 0.15 [.006]

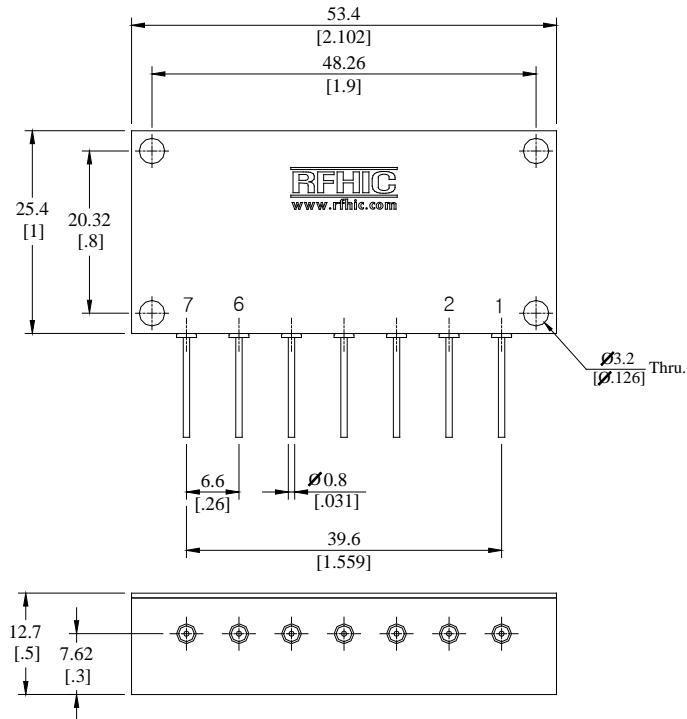

Pin Description			
Pin No	Function	Pin No	Function
1	GND	5	Vcc
2	RF IN	6	RF OUT
3	NC(Not Connection)	7	GND
4	GND	-	-

Revision History

Part Number	Release Date	Version	Modification	Data Sheet Status
RWS05020-10	2012.11.9	1.2	Electrical Specifications modification.	-
RWS05020-10	2012.9.5	1.1	-	-

RFHIC Corporation reserves the right to make changes to any products herein or to discontinue any product at any time without notice. While product specifications have been thoroughly examined for reliability, RFHIC Corporation strongly recommends buyers to verify that the information they are using is accurate before ordering. RFHIC Corporation does not assume any liability for the suitability of its products for any particular purpose, and disclaims any and all liability, including without limitation consequential or incidental damages. RFHIC products are not intended for use in life support equipment or application where malfunction of the product can be expected to result in personal injury or death. Buyer uses or sells such products for any such unintended or unauthorized application, buyer shall indemnify, protect and hold RFHIC Corporation and its directors, officers, stockholders, employees, representatives and distributors harmless against any and all claims arising out of such unauthorized use.

Sales, inquiries and support should be directed to the local authorized geographic distributor for RFHIC Corporation. For customers in the US, please contact the US Sales Team at 919-677-8780. For all other inquiries, please contact the International Sales Team at 82-31-250-5078.