

## HyperLink Wireless 2.4/5.8 GHz 4 dBi Spatial Diversity MIMO Ceiling Antenna Model: HG2458-4SDC-6

### Applications

- IEEE 802.11a/b/g/n and 802.11ac applications
- Coverage of 2.4GHz /5GHz WiMAX
- Use in 2.4GHz/5GHz WLAN systems
- Access points and routers with diversity
- Indoor wireless hotspot

### Features

- Space Diversity, MIMO Technique
- Compact Ceiling Mount design
- Suitable for Indoor Use
- Durable UV-stable white ABS radome
- Multiple connector options



### Description

The HyperLink Wireless HG2458-4SDC-6 series 2.4 GHz/5.8GHz MIMO antennas feature six independent antenna elements in a single package. The antenna is omni-directional for improved coverage in large areas. The unit is designed for use with access points and routers with up to six antenna ports for spatial diversity. The spatially diverse elements allow the radios to select the antennas with the best signal quality.

Designed for indoor operations, the HG2458-4SDC-6 features a compact radome permitting mounting in many areas where space is at a premium for the antenna. This allows the antenna to be positioned for optimal performance. The HG2458-4SDC-6 has great appeal for office, health facilities, educational settings, industrial sites, and retail complexes, all where broad area coverage is demanded. In addition to being compatible with IEEE 802.11a/b/g/n applications, the HG2458-4SDC-6 can be used with IEEE 802.11ac applications which provides up to 1 Gbps wireless transmissions as well as 80 MHz channel bandwidth.

The lightweight and aesthetically pleasing UV-stable white ABS UL flame rated radome easily installs in many different types of ceilings found in today's offices and factories. The antenna cables are hidden when the mounted in the ceiling via the threaded mounting post built into the antenna base plate.



## Specifications

### Mechanical Specifications

Output Connectors	Six (6) each on 18-inch Coax Cable Lead
Mounting	Threaded post on Back Plate
Radome	UV-Inhibited ABS, UL Flame Rated
Operating Temperature	-40° C to 55° C (-40° F to 131° F)
Dimensions	5.8 X 2.4 inch (148 x 60 mm)
Weight - Antenna	1.2 lbs. (0.5 Kg)
RoHS Compliant	Yes


### Electrical Specifications

Frequency	2400-2500 MHz /5150-5850 MHz
Gain ( dBi )	4 dBi
Polarization	Vertical
Vertical Beamwidth	50°
Horizontal Beamwidth	360° Omni-directional
Max. Input Power	50W
Impedance	50 Ohms
VSWR	≤1.8:1 / ≤2.5:1
Lightning Protection	DC Ground


### Antenna Models

ANTENNA MODEL	CONNECTOR OPTIONS
HG2458-4SDC-6NF	6-Coax 18" Cables with N-Female Connectors
HG2458-4SDC-6NM	6-Coax 18" Cables with N-Male Connectors
HG2458-4SDC-6RSP	6-Coax 18" Cables with RP SMA Plug Connectors
HG2458-4SDC-6RTP	6-Coax 18" Cables with RP TNC Plug Connectors
Special Orders	Call for Connector Options

## RF Antenna Patterns

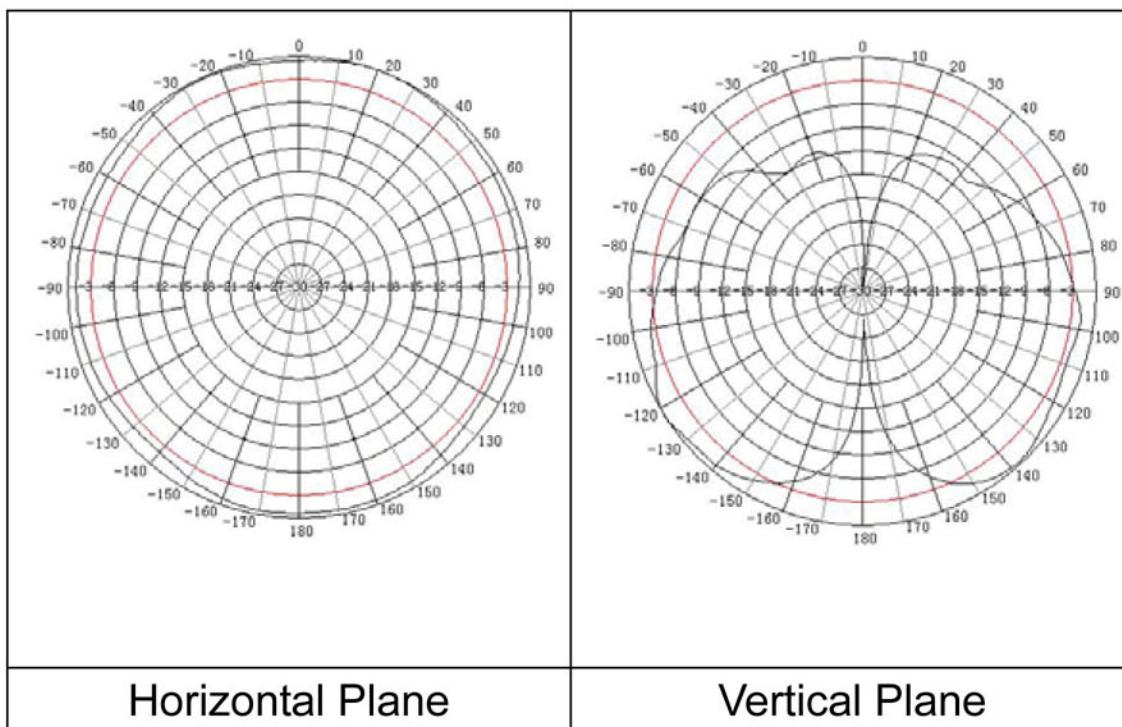

**2.4GHz**

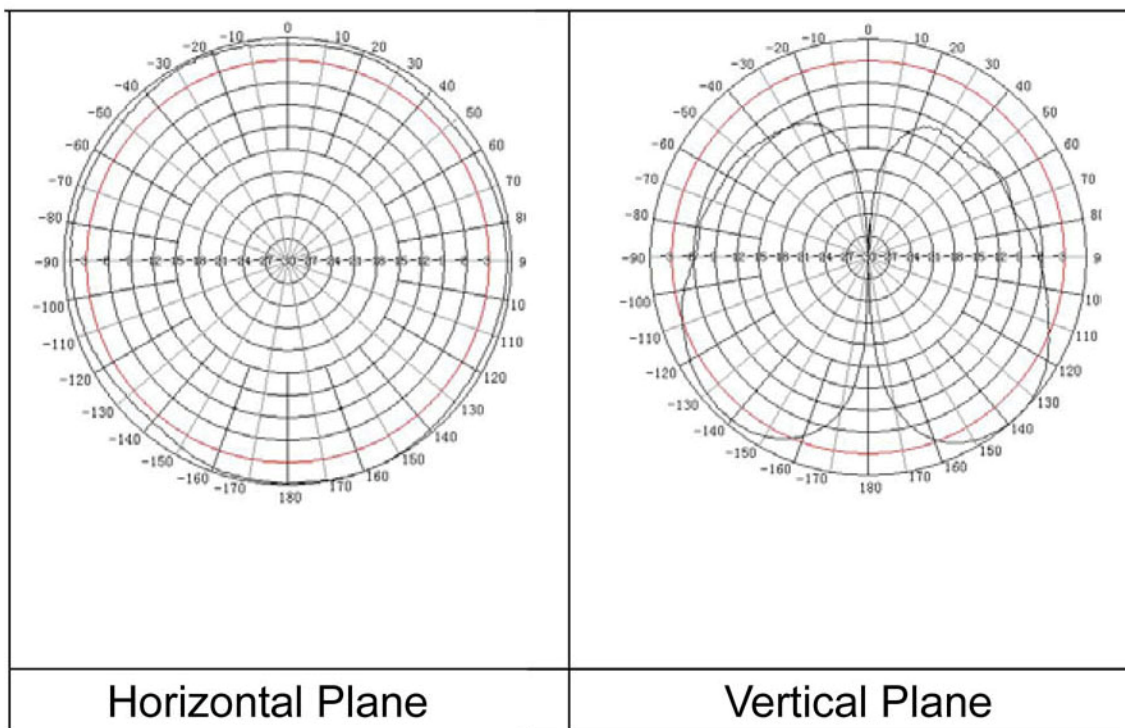

**5 GHz**