

# SMA-M CONNECTOR RG174 RG316 CRIMP

SC7060

## SPECIFICATIONS









### ELECTRICAL:

FREQUENCY: 0-18 GHZ  
VSWR 1.3:1 MAX  
IMPEDANCE: 50 OHMS  
OP. TEMP RANGE: -55C- +155C

### MECHANICAL:

MATERIAL BODY: NICKLE PLATED BRASS  
CENTER CONTACT: BRASS  
CONTACT PLATING: Au PER MIL-G-45204  
INSULATOR: TEFLON  
INTERFACE: MIL-STD-348A

ROHS COMPLIANT

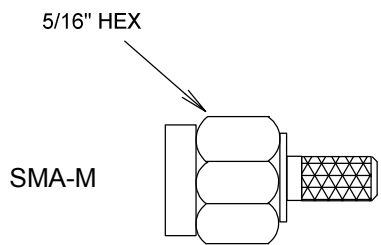

STRIPPING DIMENSIONS

					FAIRVIEW MICROWAVE INC.		
					ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM		
					TITLE		
					SMA-M CONNECTOR RG174 RG316		
					CRIMP		
SIZE		CAGE CODE	DWG NO		REV		
A		3FKR5	SC7060		--		
SCALE			SHEET				