


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

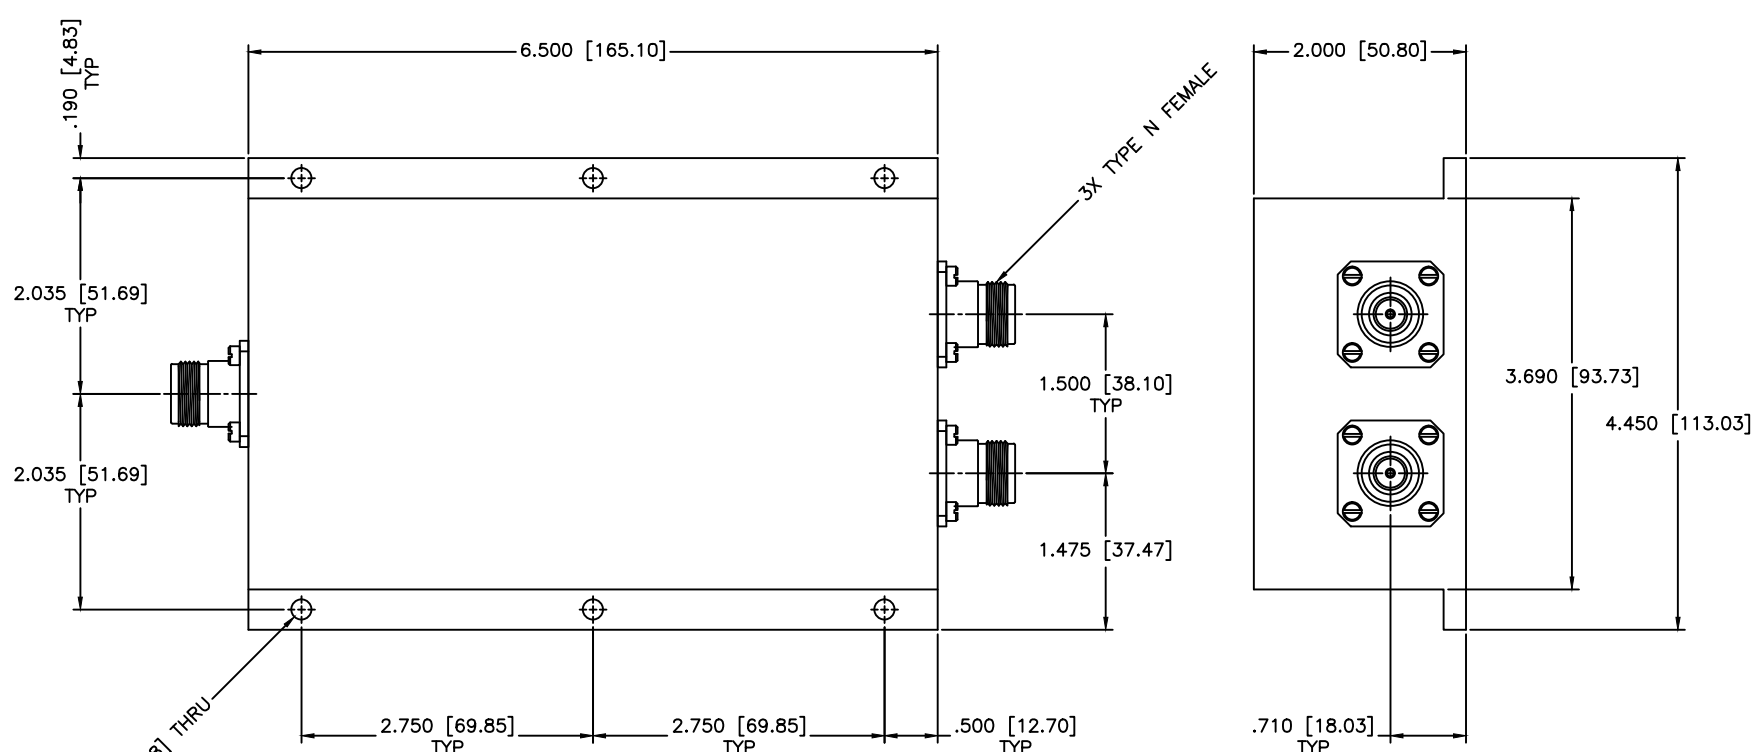

SPECIFICATIONS

Frequency Range: 30–400 MHz
 Insertion Loss: 0.4dB Max.
 Isolation: 20dB Min.
 VSWR: 1.35:1 Max.
 Power: 300 Watts CW
 Amplitude Balance: ±0.2dB Max.
 Phase Balance: ±5 Deg. Max.

MATERIAL:				MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-8254 FAX: (727) 381-8118 http://www.MCLI.COM		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED:		TOLERANCES		DRAWING TITLE:		N/A	
IN (INCHES) OR (mm) (MILLIMETERS)		FRACTIONS: ± 1/64		2-WAY POWER DIVIDER/COMBINER		SHEET:	
DECIMALS: ±0.01 ±0.005		ANGLE: ±1/2°		PART NO.:		N/A	
DRAWN: Paiboon Luethamhan		DATE: 01-31-2011		PLH2-32		CAGE CODE:	
APPROVED: T. Nguyen		DATE: 01-31-2011		OD2L5		SIZE:	
						REV:	
						N/A	
						N/A	
						DWG NO.:	
						85270	
						DO NOT SCALE THE DRAWING	