

## DC-170MHz – Low Pass Filter

### Design Features


- ◆ High RF performance, ultra-competitive price.
- ◆ Military, space and commercial applications.
- ◆ Custom design available upon request.
- ◆ Guaranteed for one year standard.

### RF Characteristics

Model Number	Pass Band (MHz)	Insertion Loss Max(dB)	VSWR Max	Rejection	Power (W)	Connector Type	Temp.(°C)
UIYLPF13827A170NF	DC-170	0.5	1.35	45dB @850MHz	100	N-F	-40 ~ +85
UIYLPF13827A170SF	DC-170	0.5	1.35	45dB @850MHz	100	SMA-F	-40 ~ +85

- <sup>2</sup> Listed are specific frequency ranges and other ranges are available.
- <sup>2</sup> Please provide the below informations when inquiring and mark \* is required.
- \* 1. The specific pass band frequency range
  - \* 2. The specific rejection and frequency
  - 3. Other special requests (such as Insertion Loss, VSWR, Connector Type, Dimension, etc.)

### Mechanical Drawing

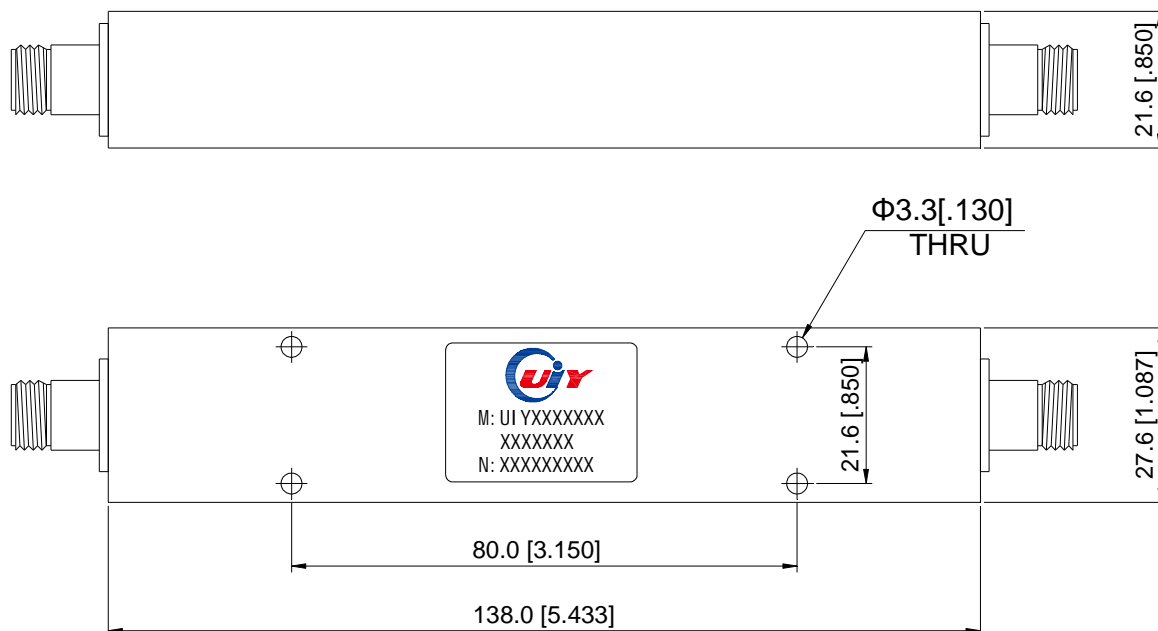

Unit: mm/ inch, General part tolerance is ±0.2mm unless otherwise stated.

Ver. 5

A2-5G, Zhujiang Plaza, Longxiang Blvd, Longgang District, Shenzhen 518172, China.

Tel: +86-755-25999990 25999909 Fax: +86-755-25999959 E-mail: sales@uiy.com Web: www.uiy.com