


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

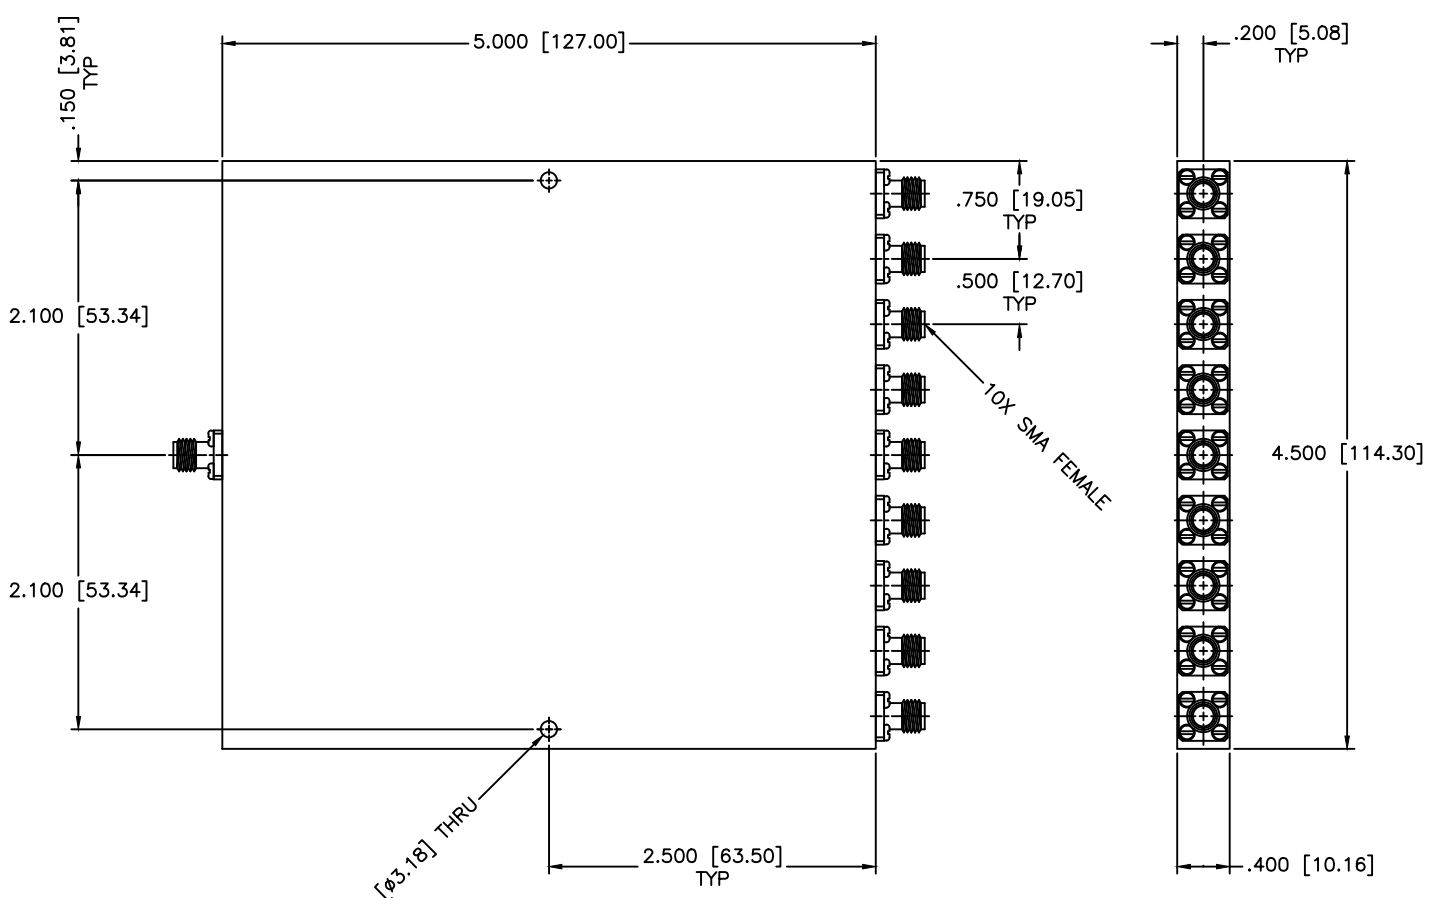

SPECIFICATION

Frequency Range: 824–849 MHz
 Insertion Loss: 1.2dB Max.
 Isolation: 17dB Min.
 VSWR IN/OUT: 1.60:1/1.45:1 MAX.
 Amplitude Balance: ±0.4dB
 Input Power: 10 Watts

2X Ø.125 [Ø3.18] THRU

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 12-30-2004
APPROVED: T. Nguyen	DATE: 12-30-2004



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

DRAWING TITLE:
9-WAY POWER DIVIDER

PART NO.
PS9-4

FREQUENTLY USED:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)
 THIRD ANGLE PROJECTION

CAGE CODE:
OD2L5

SIZE: A	REV: N/A
DO NOT SCALE THE DRAWING	

DWG. NO.
82073