


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

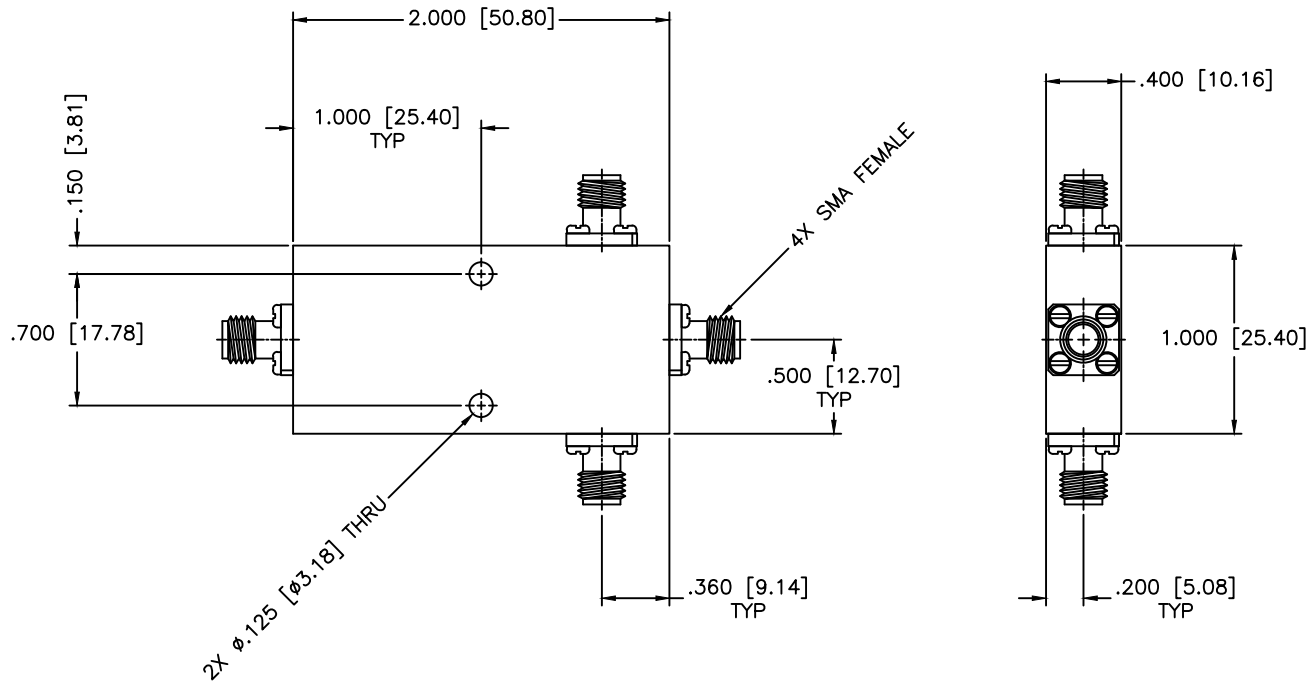

SPECIFICATIONS

Frequency Range: 4–8.5 GHz
 Insertion Loss: 1.2dB Max.
 Isolation: 15dB Min.
 Phase Balance: ±6 Deg. Max.
 Amplitude Balance: ±0.4dB Max.
 VSWR: 1.60:1 Max.
 Power: 20W (Load vswr@1.2)

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com	SCALE:	N/A
			SHEET:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		DRAWING TITLE: 3-WAY POWER DIVIDER		
DRAWN: Paiboon Luekhamhan		PART NO. PS3-39		
DATE: 06-08-1999	DATE: 06-08-1999	CAGE CODE: OD2L5	SIZE: A	REV: N/A
APPROVED: T. Nguyen	DATE: 06-08-1999	DO NOT SCALE THE DRAWING		DWG NO. 80919