
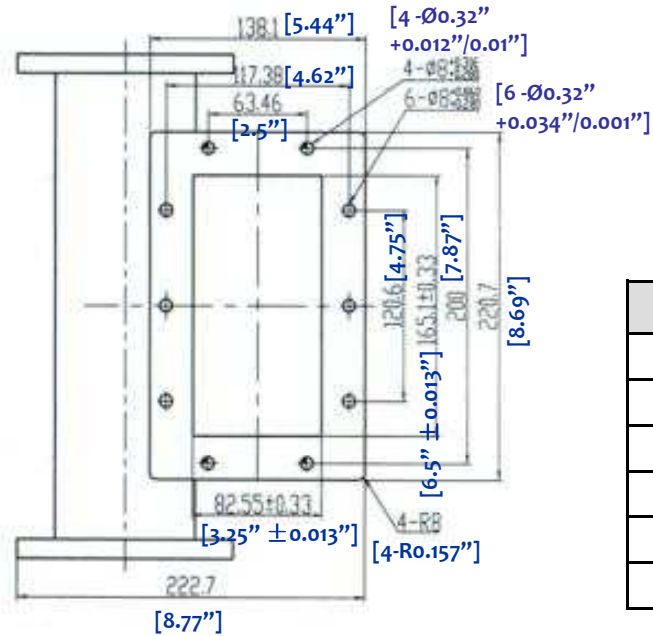


# WAVEGUIDE WR650 5000W DIRECTIONAL COUPLER- RWGCP650SA

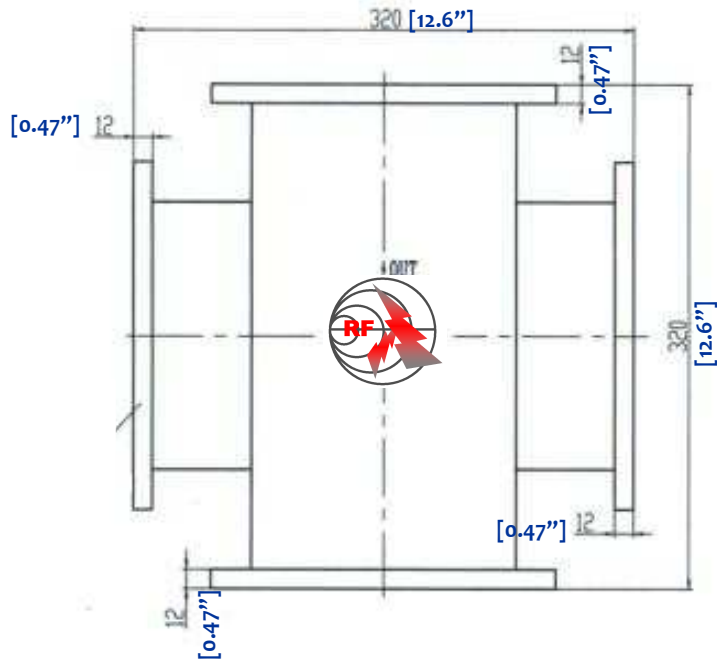

3.0	Electrical Specifications	
3.1	Frequency Range	1.13~1.73GHz
3.2	Coupling	17~60dB
3.3	Directivity	20dB
3.4	VSWR (master)	1.1
3.5	VSWR (2 <sup>nd</sup> Line)	1.25
3.6	Insertion Loss	0.15dB

1.0	Mechanical Specifications	
1.1	Waveguide type	Rectangular Waveguide WR650
1.2	Flange type	CPRG, CPRF, COVER, CHOKE available
1.3	Flange Holes	Through
1.4	Basis-material	Cuprum
1.5	Internal Body Finish	Plated chromate or conversion
1.6	External Body Finish	Body painted with gray/black epoxy enamel

2.0	Environment specifications	
2.1	Operation Temp.	-40°C~+85°C
2.2	Storage Temp.	-60°C~+125°C
2.3	Altitude	45000 ft
2.4	Vibration	10g rms (15 degree 2KHz)
2.5	Humidity	100% RH at 35c, 95%RH at 40 deg c
2.6	Shock	20G for 11msc

PAGE	OF	DATE
		Feb 14 <sup>th</sup> 2007
<small>PROPRIETARY INFORMATION THE INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF RF-LAMBDA EXCEPT AS SPECIFICALLY AUTHORIZED IN WRITING BY RF-LAMBDA. THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN THE WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION OF ALL THIRD PARTIES AND SHALL USE SAME FOR OPERATING AND MAINTENANCE PURPOSES ONLY</small>		DESIGN
		RFPC
		RF-LAMBDA
		RFPC
		CAD MODEL REVISION
		1-4
		ASSEMBLY REVISION
		VS20-3
		ASSEMBLY NAME
		RFLVR04
		DRAWING NUMBER
		D02-5
<a href="http://www.rflambda.com">www.rflambda.com</a>		
<b>RF-LAMBDA</b>		
SIZE	LT	SHEETS
		1 OF 1

