


**Key Features:**

- Frequency range: 1.70~2.60GHz, bandwidth up to 100MHz
- WR-430 waveguide, Cover flange
- Power handling >1000Watts CW
- Customer specify center frequency and bandwidth

**Electrical Specifications**

Part No.	Freq Range MHz	Insertion Loss, dB	Reverse Isolation, dB	VSWR	CW Power, Watts CW	Temp. Range, °C
F3540-0207-05	2.02~2.12	0.3 Max	≥ 20	≤1.20	1000	-30 ~ +55
F3540-0215-05	2.10~2.20	0.3 Max	≥ 20	≤1.20	1000	-30 ~ +55
F3540-0245-04	2.40~2.50	0.3 Max	≥ 20	≤1.20	1000	-30 ~ +55

**Mechanical Structure:**

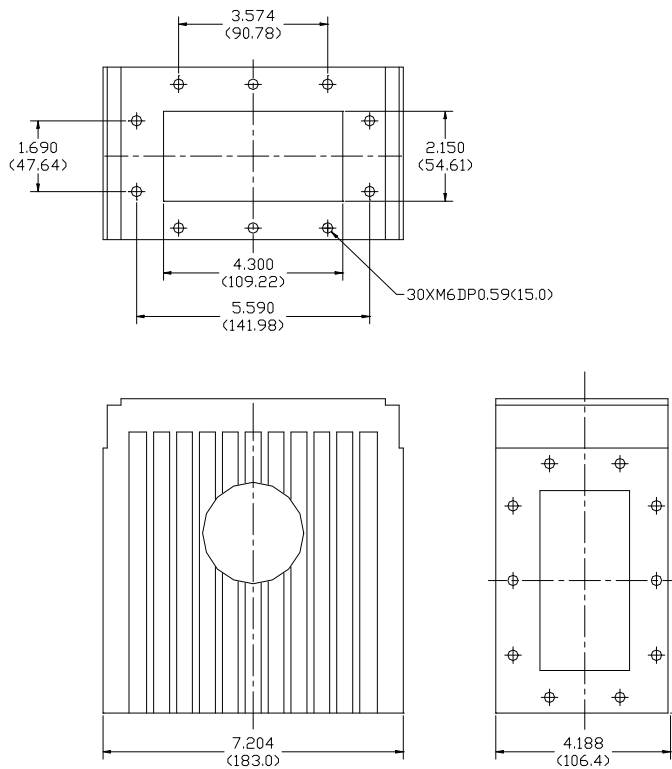

All units in inches (mm)

**Ordering Information:**

