


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

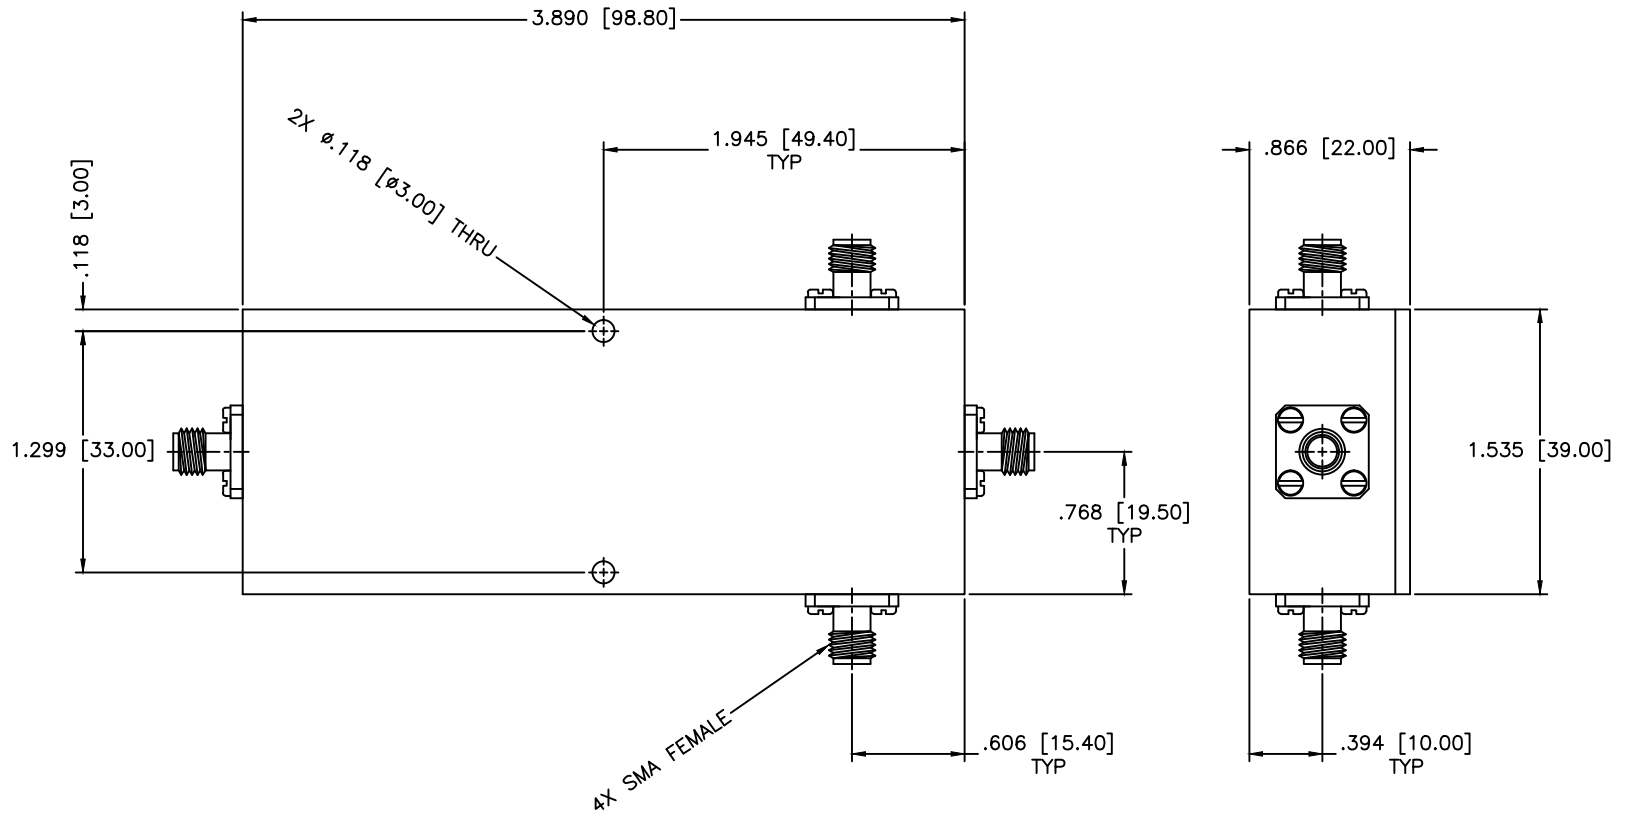

SPECIFICATIONS

Frequency Range: 800–2500 MHz
 Insertion Loss: 5.4dB Max.
 Isolation: 20dB Min.
 Power Rating: 50 W
 Impedance: 50 Ohms
 VSWR: 1.25:1 Max.
 Operating Temperature: -35°C to +55°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 07-17-2006
APPROVED: T. Nguyen	DATE: 07-17-2006

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: <h3>3-WAY POWER DIVIDER</h3>		PART NO. PM3-114	
CAGE CODE: 0D2L5	SIZE: A	REV: N/A	DWG NO. 82593
DO NOT SCALE THE DRAWING			

PROPRIETARY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES, INC. (MCLI)

THIRD ANGLE PROJECTION