


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

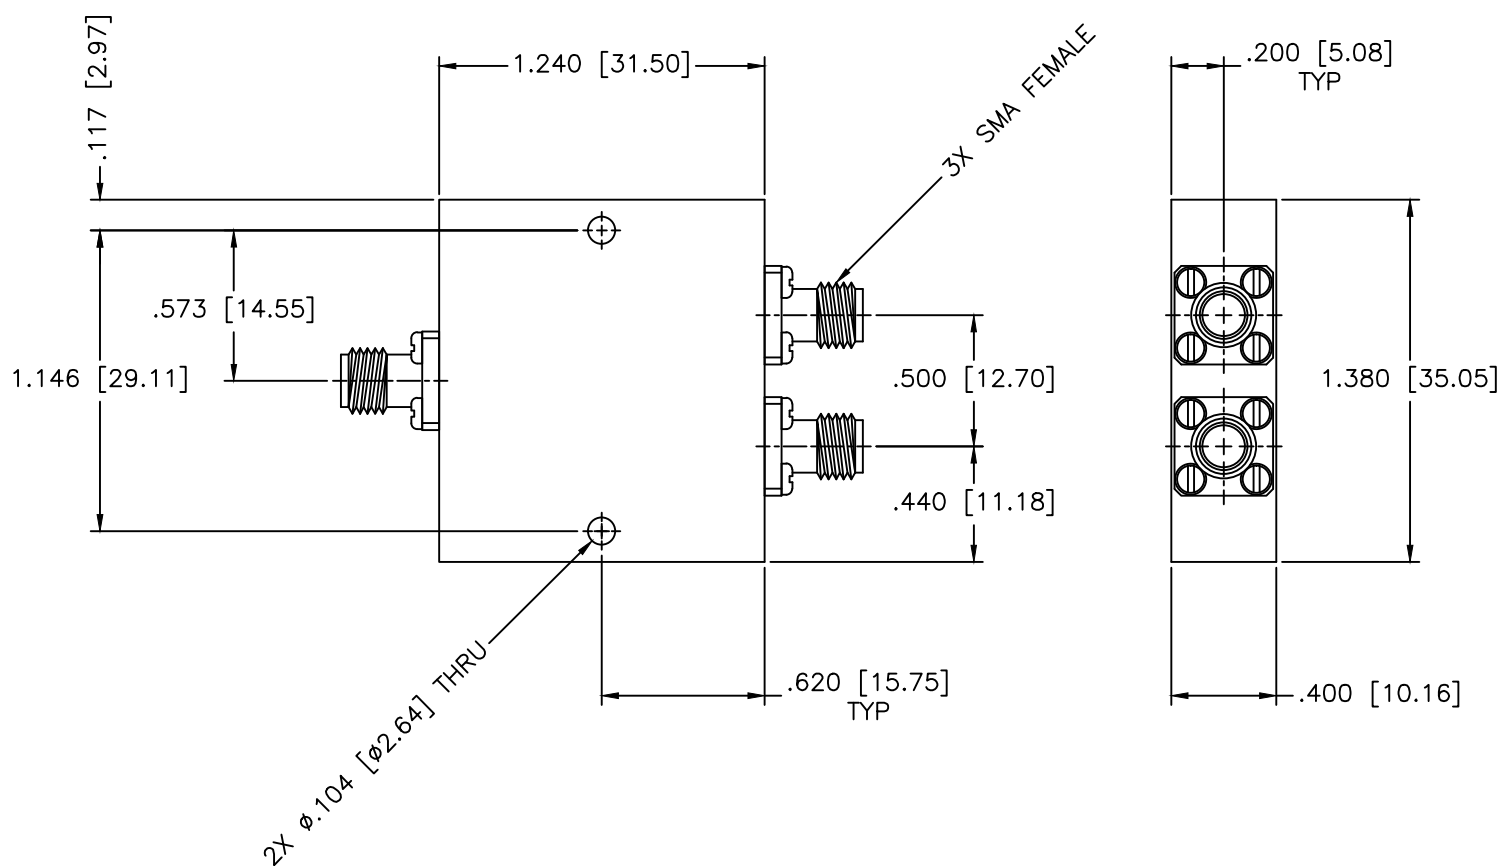

SPECIFICATIONS

Frequency Range: 0.5–2.0 GHz
 Insertion Loss: 0.6dB Max.
 Isolation: 22dB Min.
 VSWR Input/Output: 1.25:1/1.15:1 Max.
 Phase Balance: ±2 Deg. Max.
 Amplitude Balance: ±0.2dB Max.
 Power: 30 Watts (Load vswr@1.2)

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 04-15-1999
APPROVED: T. Nguyen	DATE: 04-15-1999



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

DRAWING TITLE:
2-WAY POWER DIVIDER

PART NO.
PS2-3NAD

THIRD ANGLE PROJECTION

CAGE CODE:
OD2L5

SIZE: N/A
 REV: A
 DO NOT SCALE THE DRAWING

DWG NO.
81166