

DIRECTIONAL COUPLER

C20-0R612

The C20-0R612 is a broadband 0.6-12 GHz, 20 dB directional coupler. The multisection tri-plate stripline design exhibits excellent coupling flatness and VSWR at all ports. Custom designs are also available; contact the factory for details.

Features

- Broadband Performance
- High Directivity
- Low VSWR




Electrical Specifications

Parameter ¹	Frequency Range (GHz)	Min	Typ	Max	
Mean Coupling (dB)	0.6-12		20		
Amplitude Flatness (dB) ²			±0.6	±1.2	
Direct Line Insertion Loss (dB)					1.5
VSWR				1.2	1.35
Directivity (dB)			15	22	
Weight (g)				90	

¹Specifications guaranteed when operated in a 50Ω system.

²Deviation from average coupling.

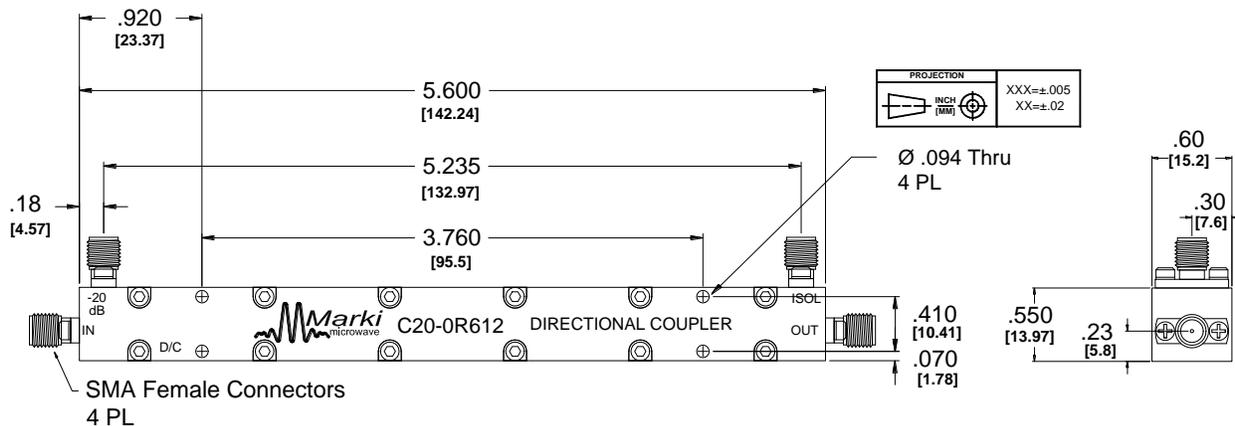

Typical Performance

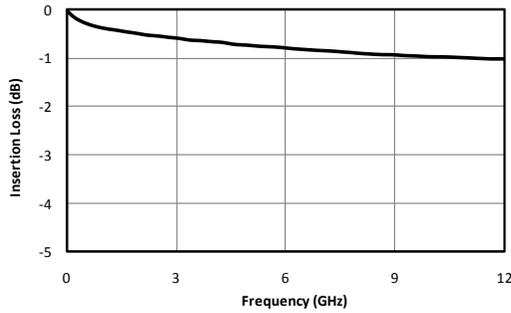


Fig. 1. Direct line insertion loss.

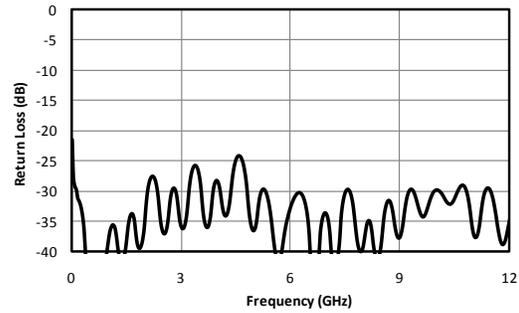


Fig. 2. Typical port return loss.

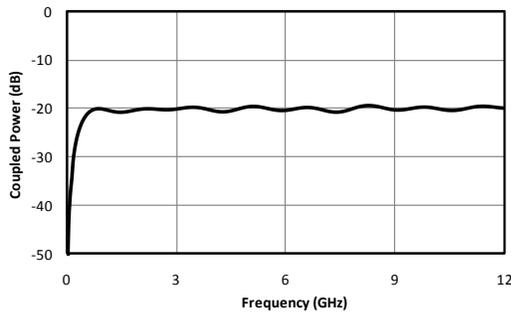


Fig. 3. Coupled port power.

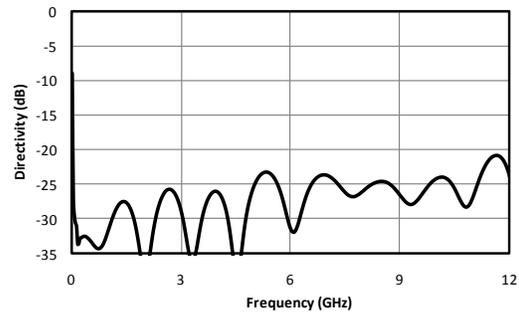


Fig. 4. Typical directivity.

Model Number	Description
C20-0R612	0.6-12 GHz 20 dB Directional Coupler with SMA connectors

¹Default is SMA female connectors. Consult factory for other connector options.

Marki Microwave reserves the right to make changes to the product(s) or information contained herein without notice. Marki Microwave makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does Marki Microwave assume any liability whatsoever arising out of the use of or application of any product.

© Marki Microwave, Inc.

