


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

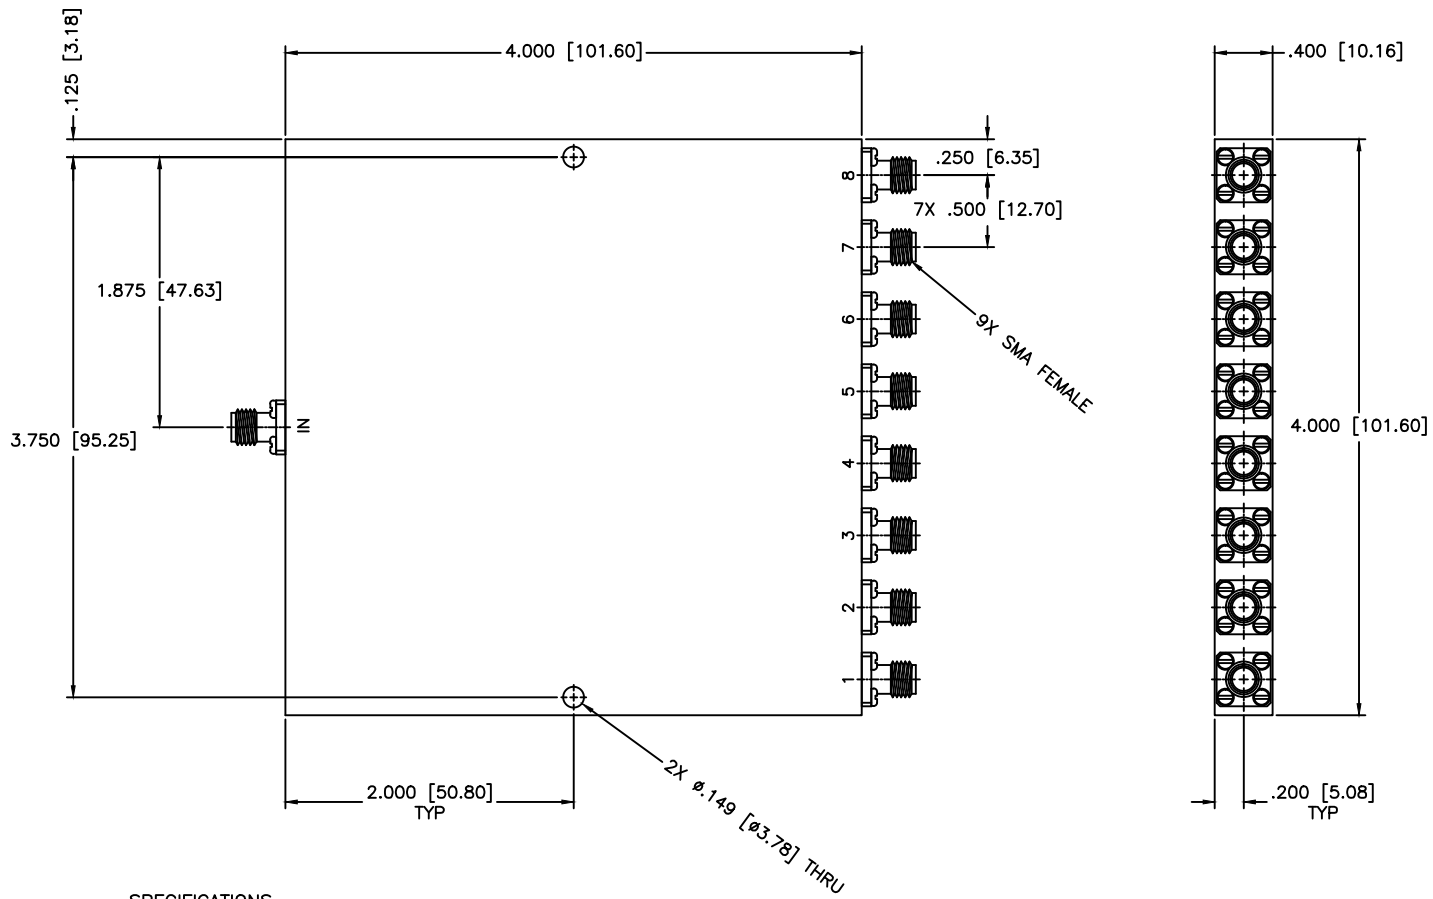

SPECIFICATIONS

Frequency Range: 3–6 GHz
 Insertion Loss: 1.8dB Max.
 Isolation: 17dB Min.
 Power Rating: 10W
 Amplitude Balance: ±0.7dB
 VSWR: 1.65:1 Max.
 Phase Balance: ±10° Deg
 Operating Temperature: -55°C to +85°C

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 03-08-1998
APPROVED: T. Nguyen	DATE: 03-08-1998



MICROWAVE COMMUNICATIONS LABORATORIES INC.
 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
 TEL: (727) 344-6254 FAX: (727) 381-6116
 http://WWW.MCLI.COM

SCALE:	N/A
SHEET:	N/A

UNLESS OTHERWISE SPECIFIED:
 TOLERANCES
 IN (INCHES) OR [mm] (MILLIMETERS)
 FRACTIONS: ± 1/64
 DECIMALS: ±.01 ±.005
 ANGLE: ±1/2°

DRAWING TITLE:
8-WAY POWER DIVIDER

PART NO.
PS8-81

PROPERTY NOTICE:
 THE INFORMATION IN THIS DRAWING IS PROPRIETARY
 AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN
 PERMISSION FROM MICROWAVE COMMUNICATIONS
 LABORATORIES INC. (MCLI)

CAGE CODE:	SIZE:	REV:	DWG NO.
OD2L5	N/A	N/A	80994
DO NOT SCALE THE DRAWING			

