

## 8 to 20GHz – Coaxial Circulator

### Design Features

- ◆ Can be dual junction even three for high isolation.
- ◆ Military, space and commercial applications.
- ◆ Guaranteed for one year standard.
- ◆ High RF performance, ultra-competitive price.
- ◆ Custom design available upon request.

### RF Characteristics


Model Number	Freq. Range (GHz)	Insertion Loss Max(dB)	Isolation Min(dB)	VSWR Max	Forward Power(W)	Reverse Power(W)	Connector Type	Temp.(°C)
UIYCC1215A8T10SF	8.0 ~ 10.0	0.4	20	1.2	30	30	SMA-F	-40 ~ +85
UIYCC1215A93T95SM	9.3 ~ 9.5	0.3	23	1.2	30	30	SMA-M	-40 ~ +85
UIYCC1215A10T13SF	10.0 ~ 13.0	0.4	21	1.2	30	30	SMA-F	-40 ~ +85
UIYCC1215A107T133SFTSM	10.7 ~ 13.3	0.35	23	1.2	30	30	SMA-F to SMA-M	-40 ~ +85
UIYCC1215A12T18SF	12.0 ~ 18.0	0.6	18	1.35	30	30	SMA-F	-40 ~ +85
UIYCC1215A1375T145SF	13.75 ~ 14.5	0.3	23	1.2	30	30	SMA-F	-40 ~ +85
UIYCC1215A138T178SF	13.8 ~ 17.8	0.5	18	1.3	30	30	SMA-F	-40 ~ +85
UIYCC1215A155T165SF	15.5 ~ 16.5	0.3	23	1.2	30	30	SMA-F	-40 ~ +85
UIYCC1215A177T197SF	17.7 ~ 19.7	0.5	20	1.2	30	30	SMA-F	-40 ~ +85
UIYCC1215A18T20SF	18.0 ~ 20.0	0.5	20	1.2	30	30	SMA-F	-40 ~ +85

<sup>2</sup> List are specify frequency range and other ranges available.

<sup>2</sup> Please enter below information when inquiry and mark \* is must.

- \* 1. The specific frequency range
- \* 2. Power handling (Forward, Reverse, Peak, etc.)
- \* 3. Connect type (SMA Male/ Female, N Male/ Female, etc.)
- 4. Other special request if have (Insertion Loss, Isolation, VSWR, Temperature, Dimension, etc.)

### Mechanical Drawing

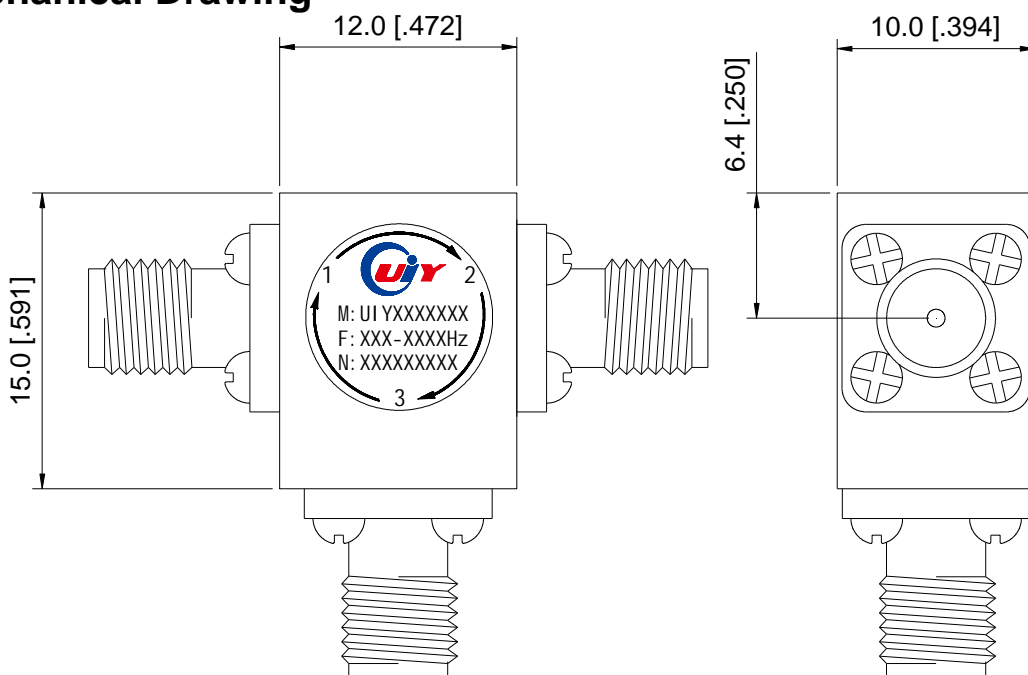

Unit: mm/ inch, General part tolerance is  $\pm 0.2$ mm unless otherwise stated.

Ver. 5

A2-5G, Zhujiang Plaza, Longxiang Blvd, Longgang District, Shenzhen 518172, China.

Tel: +86-755-25999990 25999909 Fax: +86-755-25999959 E-mail: sales@uiy.com Web: www.uiy.com