


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

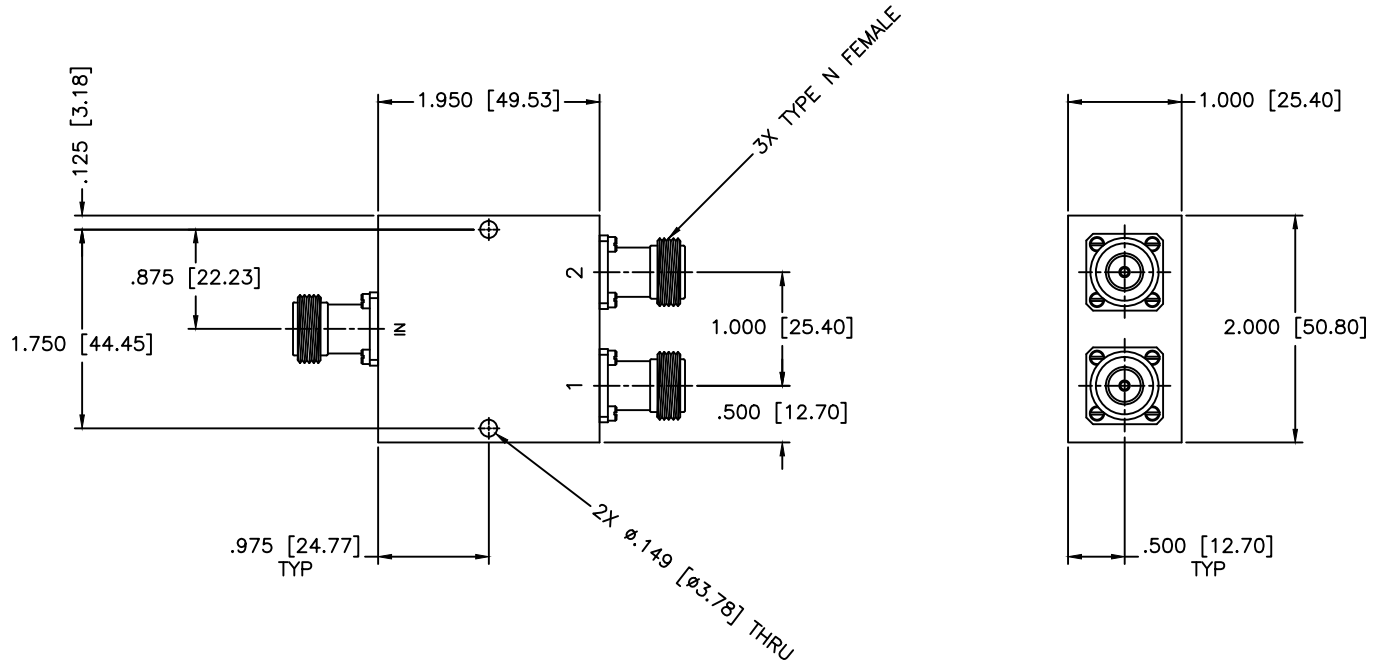

SPECIFICATIONS

- Frequency Range: 400–500 MHz
- Insertion Loss: 0.5dB Max.
- Isolation: 20dB Min.
- VSWR: 1.35:1 Max.
- Power Rating: 50W CW
- Amplitude Balance: ± 0.25 dB Max.
- Phase Balance: ± 5 Deg. Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-8110 http://www.mcli.com		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: 2-WAY POWER DIVIDER		SHEET: N/A
DRAWN: Paiboon Luakharnhan		DATE: 03-12-2010		PART NO.: PS2-189-50
APPROVED: T. Nguyen		DATE: 03-12-2010		CAGE CODE: OD2L5
		SIZE: N/A	REV: N/A	DWG NO.: 84739
DO NOT SCALE THE DRAWING				