

# ACLM-4932

## Coaxial High Power Limiter

### Features

- Low Insertion Loss
- Low Leakage Power Circuit Protection
- High CW Power Handling
- Assorted Package Styles



### Specifications:

| Parameter                     | Specification | Units |
|-------------------------------|---------------|-------|
| Frequency Range (min)         | 2.0 – 1500    | MHz   |
| Peak Input Power (max)        | 1.0           | kW    |
| CW Input Power (max)          | 60.0          | W     |
| Flat Leakage (CW Power) (max) | 14.0          | dBm   |
| Insertion Loss (max)          | 0.25          | dB    |
| VSWR (max)                    | 1.25:1        | ratio |

### Notes:

Test conditions: Full rated power for 30 seconds. Insertion loss is slightly higher for the high power versions.

Most models are broadband and will operate beyond the frequency ranges shown.

Typical leakage is 3dB below the maximum shown. Power handling is linearly derated from full power at +25°C to zero power at +150°C.

All models require external DC blocks for proper operation.

### Environmental Specifications:

Designed to meet:

MIL-E-5400, MIL-STD-202, MIL-E-16400

Operating Temp: -55°C to +125°C

Storage Temp: -65°C to +150°C

Humidity: MIL-STD-202F, M103, Cond B

Shock: MIL-STD-202F, M213, Cond B

Altitude: MIL-STD-202F, M105, Cond B

Vibration: MIL-STD-202F, M204, Cond B

Thermal Shock: MIL-STD-202F, M107, Cond A

Temperature Cycle: MIL-STD-202F, M105C, Cond D

### SCREENING:

Internal Visual per MIL-STD-883, Method 2017  
Temperature Cycle: -65°C to +100°C, 10 cycles

### OPTIONAL HIGH-REL SCREENING (Ref MIL-PRF-38534):

Stabilization Bake per MIL-STD-883, Method 1008  
Temperature Cycle per MIL-STD-883, Method 1010  
Constant Acceleration per MIL-STD-883, Method 2001

Burn-in per MIL-STD-883, Method 1015


Leak Test per MIL-STD-883, Method 1014

External Visual per MIL-STD-883, Method 2009



Revision Date: 2/23/2011

40 Industrial Way East, Eatontown, NJ 07724 [USA]  
Phone: (732) 460-0212, Fax: (732) 460-0214  
www.aeroflex.com/acc, email: acc-sales@eroflex.com

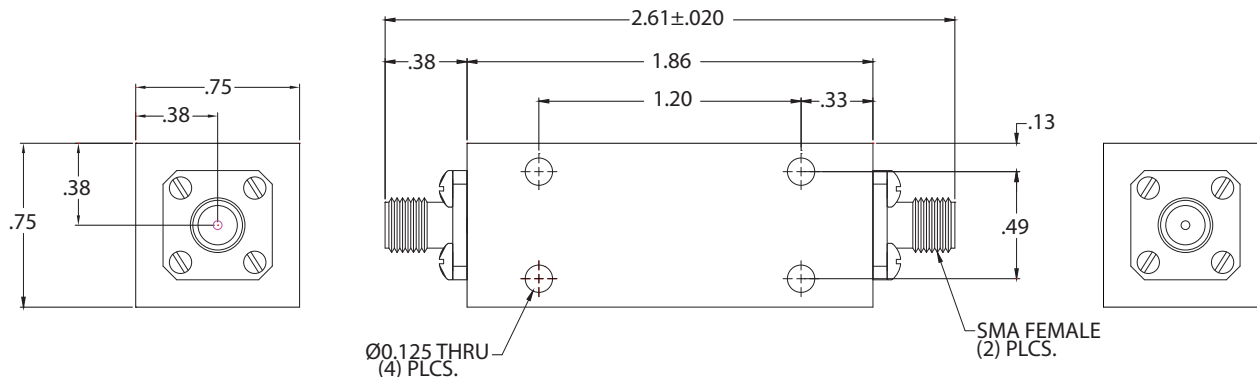

(TYPICAL WEIGHT = 46.0g)

STANDARD CASE STYLE C46  
(Optional Case Styles – C24, C25, C88, C89, M70)

### Part Number Ordering Information:

- Add desired case style suffix: "C46" (Ex: ACLM-4869C46)
- Add "R" suffix: Reverse Connector Configuration (Ex: ACLM-4869C25R) (SMA Female Input/SMA Male Output)
- Add "H" suffix: High power handling version: (Ex: ACLM-4869HC25R)
- Add "-RC" suffix: RoHS-compliant (Ex: ACLM-4869HC25-RC)

**Aeroflex Control Components**  
Aeroflex Microelectronic Solutions  
40 Industrial Way East  
Eatontown, NJ 07724 [USA]  
Fax: (732) 460-0214

Sales  
Phone: (732) 460-0212  
ACC-sales@aeroflex.com

[www.aeroflex.com/Microwave](http://www.aeroflex.com/Microwave) [www.aeroflex.com/ACC](http://www.aeroflex.com/ACC)

Aeroflex Control Components reserves the right to make changes to any products and services herein at any time without notice. Consult Aeroflex or an authorized sales representative to verify that the information in this data sheet is current before using this product. Aeroflex does not assume any responsibility or liability arising out of the application or use of any product or service described herein, except as expressly agreed to in writing by Aeroflex; nor does the purchase, lease, or use of a product or service from Aeroflex convey a license under any patent rights, copyrights, trademark rights, or any other of the intellectual rights of Aeroflex or of third parties.

Copyright 2011 Aeroflex Control Components. All rights reserved.

ISO 9001:2008 certified



Our passion for performance is defined by three attributes represented by these three icons: solution-minded, performance-driven and customer-focused.