



### Electrical specifications

**Center Frequency:** 2325 MHz  
**Bandwidth:** 10 MHz  
**Input / Output Impedance:** 50 Ohms  
**Passband:** 2320 – 2330 MHz  
**Passband variation over bandwidth:** <0.5 dB  
**Passband Insertion Loss:** <1.0 dB  
**Passband Ripple:** <0.2 dB  
**Passband Return Loss:** >18dB  
**Group delay variation over bandwidth:** <15 ns  
**Rejection:** 13 MHz offset from Center Frequency  
>20 dBc  
**Rejection 2:** 20 MHz offset from Center  
Frequency > 30 dBc  
**Power Handling:** 20 Watts  
**Peak Power Handling:** 150 Watts


### Mechanical

**Mounting Method:** Threaded Mounting Holes  
**Connector Type:** SMA Female  
**Dimensions:** 6.19 x 5.52 x 1.58 Inches

### Environmental

**Operating Temperature:** 0 to +55 deg.C  
**Storage Temperature:** -55 to +95 deg.C  
**Shock:** 20 G. 11ms  
**Vibration:** 20 G. 5to 200 MHz

### Outline Drawing:

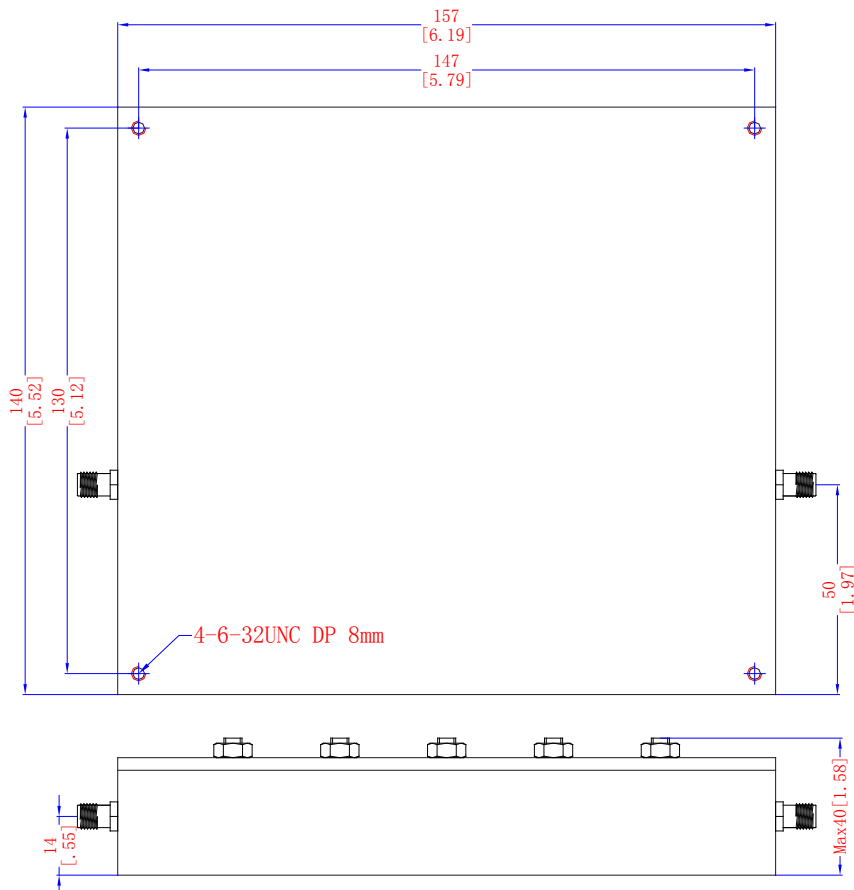




**ANATECH ELECTRONICS INC**  
RF & Microwave Filters & Products

# 2320-2330 MHz Cavity Filter

Part Number: AB2325B995



## Response Plot:

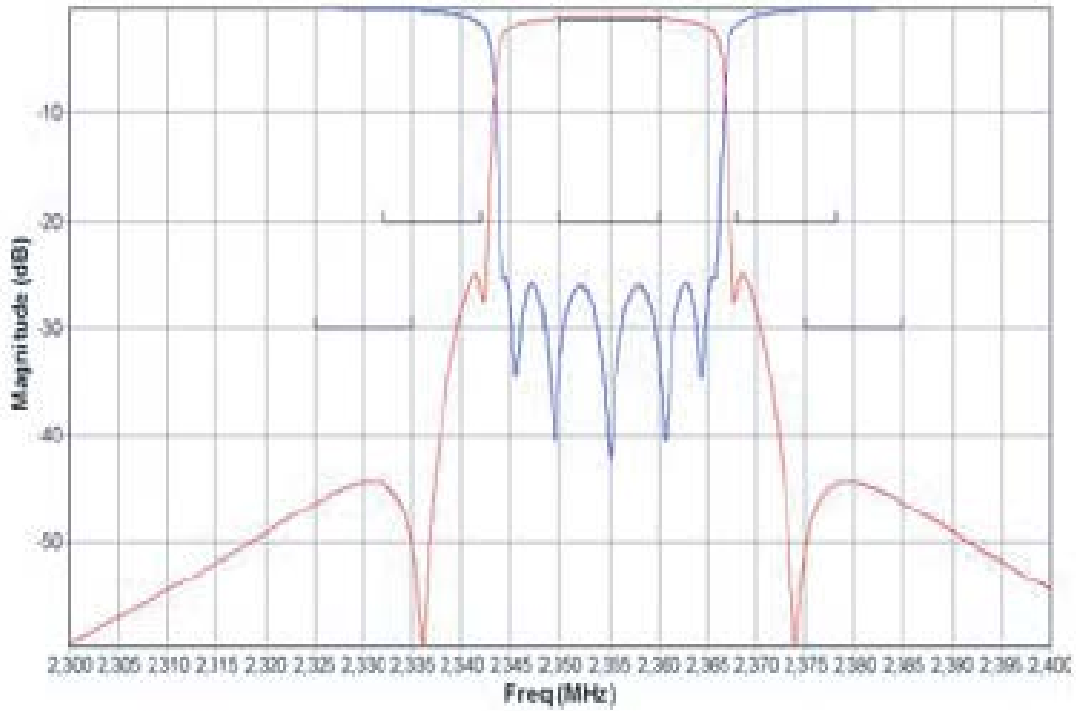

Available at our Web store:

70 Outwater Lane Phone: (973) 772-4242  
Garfield, NJ 07026 Fax : (973) 772-4646



Email: [sales@anatechelectronics.com](mailto:sales@anatechelectronics.com)  
Web: [www.anatechelectronics.com](http://www.anatechelectronics.com)