


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

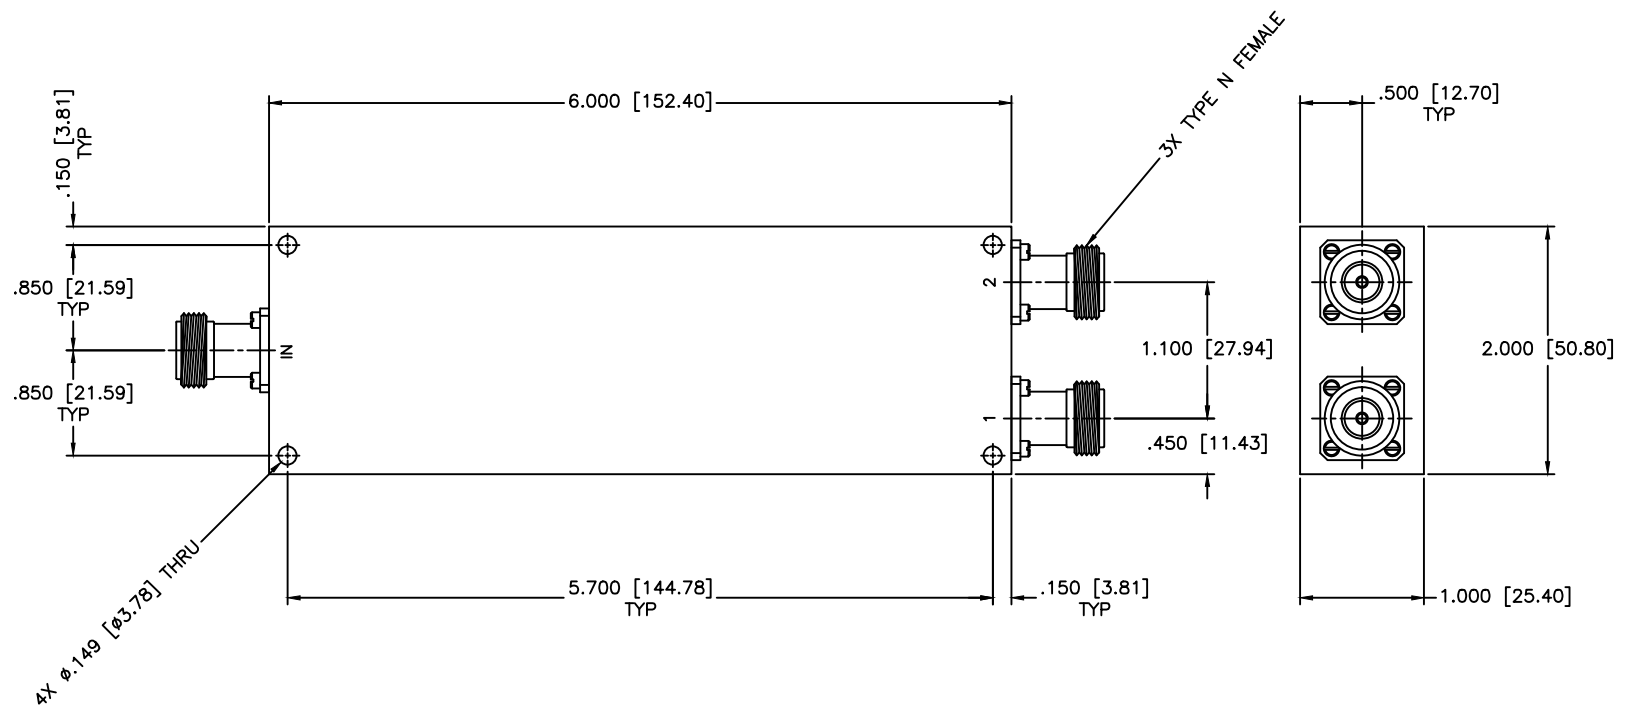

SPECIFICATIONS

Frequency Range: 450–2000 MHz
 Insertion Loss: 0.5dB Max.
 Isolation: 15dB Min.
 VSWR: 1.40:1 Max.
 Power: 100 W CW
 Amplitude Balance: ±0.2dB Max.
 Phase Balance: ±5 Deg. Max.

MATERIAL:	DRAWN: Paiboon Luakhomhan	DATE: 02-02-2011		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7250 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-8118 http://www.MCLI.COM		SCALE: N/A
				UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ± .01 ± .005 ANGLE: ± 1/2°		SHEET: N/A
APPROVED: T. Nguyen	DATE: 02-02-2011	DRAWING TITLE: 2-WAY POWER DIVIDER/COMBINER	PART NO.: PLH2-43	CAGE CODE: OD2L5		SIZE: N/A REV: N/A DWG NO.: 85315
DO NOT SCALE THE DRAWING			DO NOT SCALE THE DRAWING			