REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

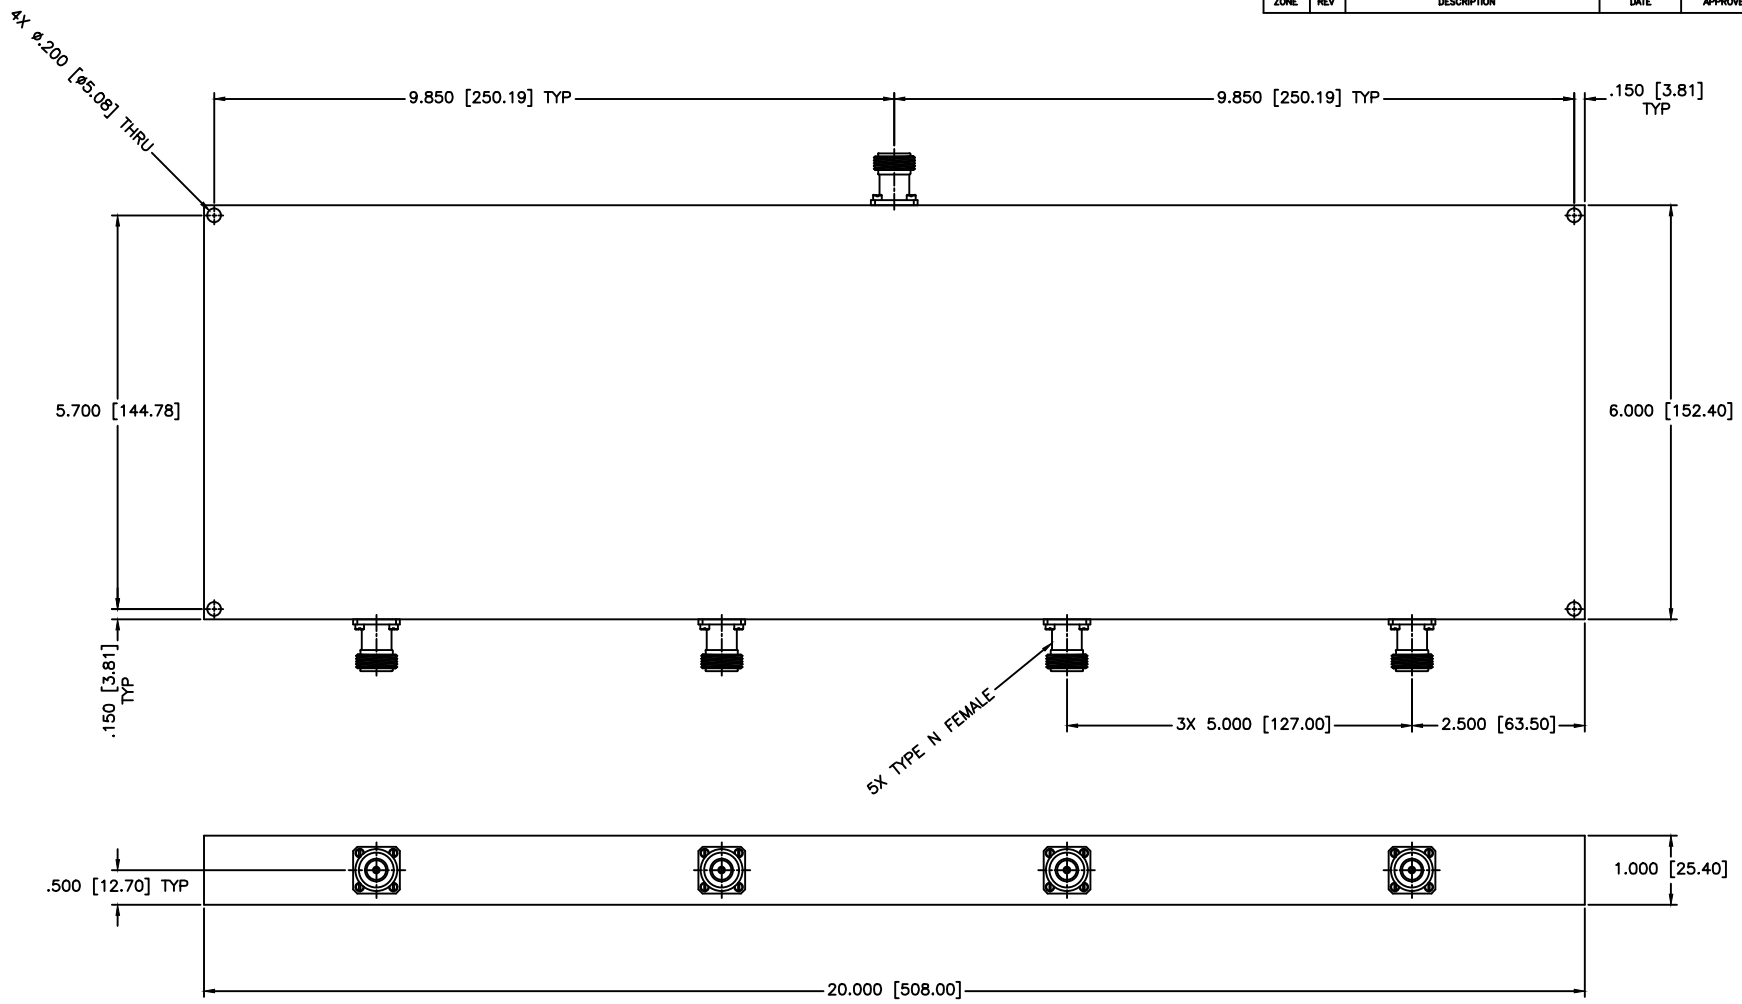

SPECIFICATIONS

Frequency Range: 0.8–1.5 GHz
Insertion Loss: 1.9dB Max.
Isolation: 18dB Min.
VSWR In/Out: 1.55:1/1.45:1 Max.
Power Rating: 30Watts CW
Amplitude Balance: ±0.6dB Max.
Phase Balance: ±4 Deg. Max.

MATERIAL:

DRAWN: Paiboon Luekhamhan — DATE: 10-07-1997

APPROVED: T. Nguyen — DATE: 10-07-1997

MCLI

MICROWAVE COMMUNICATIONS LABORATORIES INC.
7255 30TH AVE. N. SAINT PETERSBURG, FL 33710
TEL: (727) 344-6254 FAX: (727) 381-6116
hhtp://WWW.MCLI.COM

UNLESS OTHERWISE SPECIFIED:
TOLERANCES
IN (INCHES) OR [mm] (MILLIMETERS)
FRACTIONS: ± 1/64
DECIMALS: ±.01 ±.005
ANGLE: ±1/2°

PROPRIETARY NOTICE:
THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)

THIRD ANGLE PROJECTION

SCALE: N/A
SHEET: N/A

DRAWING TITLE: 4-WAY POWER DIVIDER

PART NO. PS4-120/NF

CAGE CODE: 0D2L5
SIZE: C
REV: N/A
DWG NO. 80023

DO NOT SCALE THE DRAWING