


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

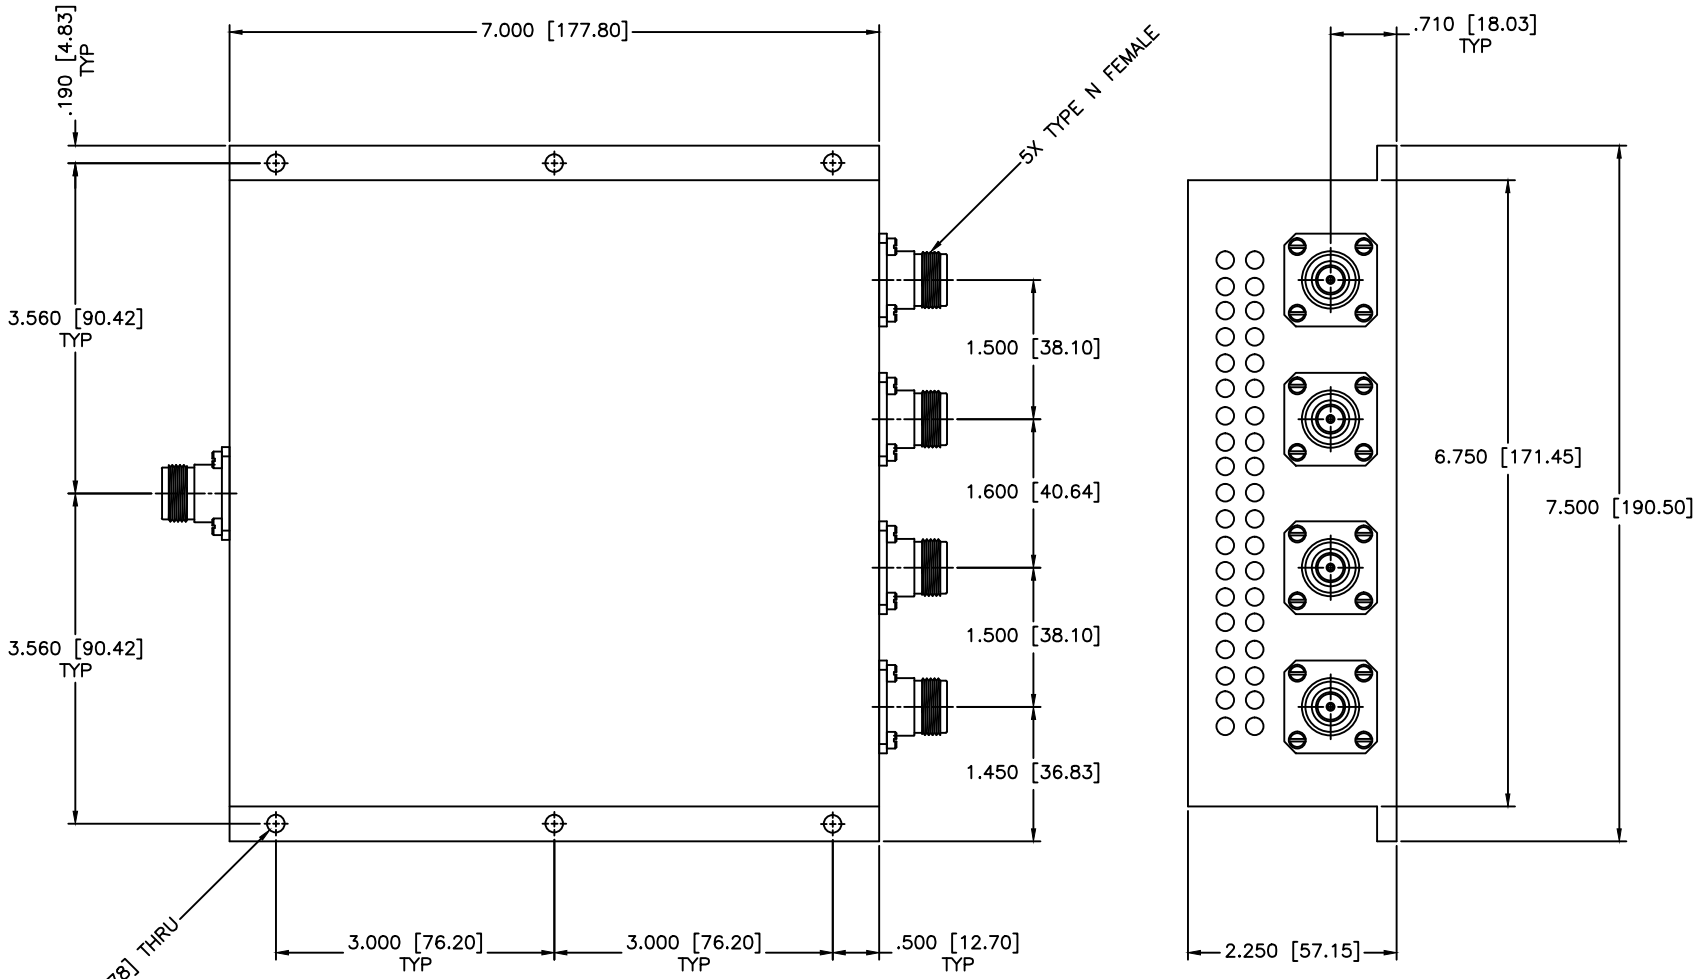

SPECIFICATIONS

Frequency Range: 20–500 MHz
 Insertion Loss: 0.70dB Max.
 Isolation: 18dB Min.
 Power: 1000 W CW
 Amplitude Balance: ± 0.5 dB Max.
 VSWR: 1.40:1 Max.
 Phase Balance: ± 5 Deg Max.

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7256 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 544-6254 FAX: (727) 381-8118 http://www.mcli.com	SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR (mm) (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.005$ ANGLE: $\pm 1/2^\circ$			SHEET: N/A
DRAWING TITLE: 4-WAY POWER DIVIDER		PART NO.: PLH4-5/1000	
DRAWN: Paiboon Luekhamhan	DATE: 12-08-2008	CAGE CODE: OD2L5	SIZE: N/A
APPROVED: T. Nguyen	DATE: 12-08-2008	REV: N/A	DWG NO.: 84011
		DO NOT SCALE THE DRAWING	