

TERMINATION SMA/MALE 18GHZ 5WATTS

ST3057

SPECIFICATIONS

ELECTRICAL:

FREQUENCY: 0-18 GHZ
 VSWR 1.15 MAX TO 12.4 GHZ
 1.25 MAX TO 18 GHZ
 POWER (AVG) 5 WATTS @ 25 DEG C
 IMPEDANCE: 50 OHMS

MECHANICAL:


MATERIAL CONNECTORS: PASSIVATED STAINLESS STEEL
 MATERIAL RING & CONTACTS: BeCu
 CENTER CONTACT: GOLD PLATED PER MIL-G-45204

RECOMMENDED TORQUE: 7-9 IN-LBS


ENVIRONMENTAL:

TEMP: -55 C to +125° C

ROHS COMPLIANT

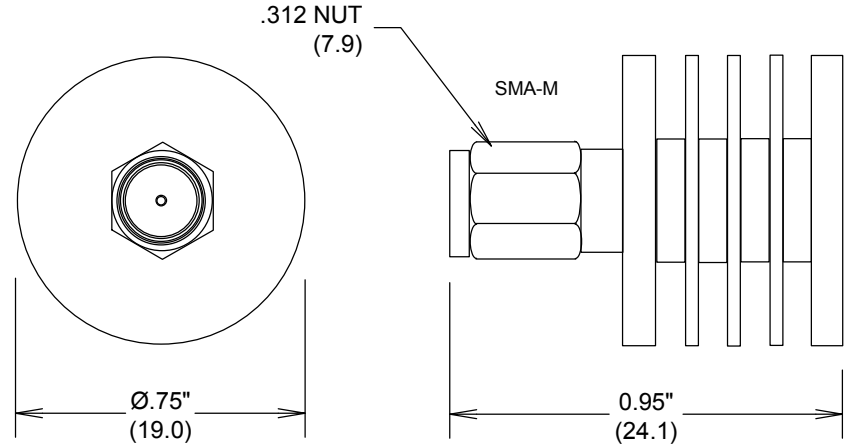

MEASUREMENTS BELOW ARE TYPICAL

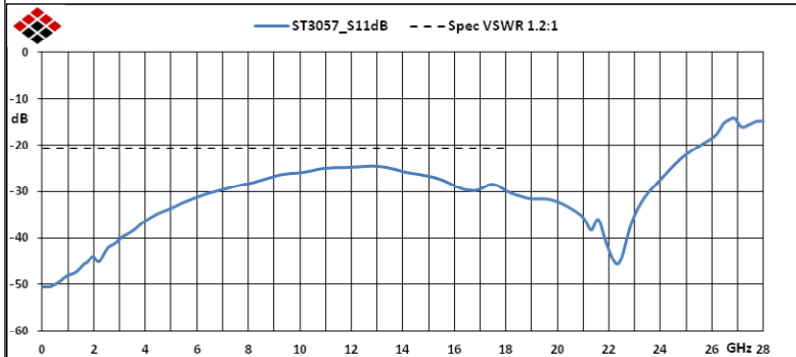

ALL DIMENSIONS IN inches(MM) Typical

FAIRVIEW MICROWAVE INC.			
ALLEN, TX 75013 WWW.FAIRVIEWMICROWAVE.COM			
TITLE			
TERMINATION SMA/MALE 18GHZ 5WATTS			
SIZE	CAGE CODE	DWG NO	REV
A	3FKR5	ST3057	B
SCALE		SHEET	