



Electrical specifications

Center Frequency: 3760 MHz
Bandwidth: 50 MHz min
VSWR: 15 dB min
Input / Output Impedance: 50 Ohms
Passband: 3735-3785 MHz
Passband Insertion Loss: 2.2 dB max
Passband Ripple: 0.2 dB max
Rejection: 30 dB min at 3520 MHz
Rejection 2: 50 dB min at 4000 MHz
Rejection 3: 60 dB min at 2880 MHz
Power Handling: 1 W

Mechanical


Mounting Method: SMT
Dimensions: 32 x 17 x 7.5 mm

Environmental

Operating Temperature: -20°C to 70°C
Storage Temperature: -50°C to +90°C

This product is RoHs compliant.

Outline Drawing:

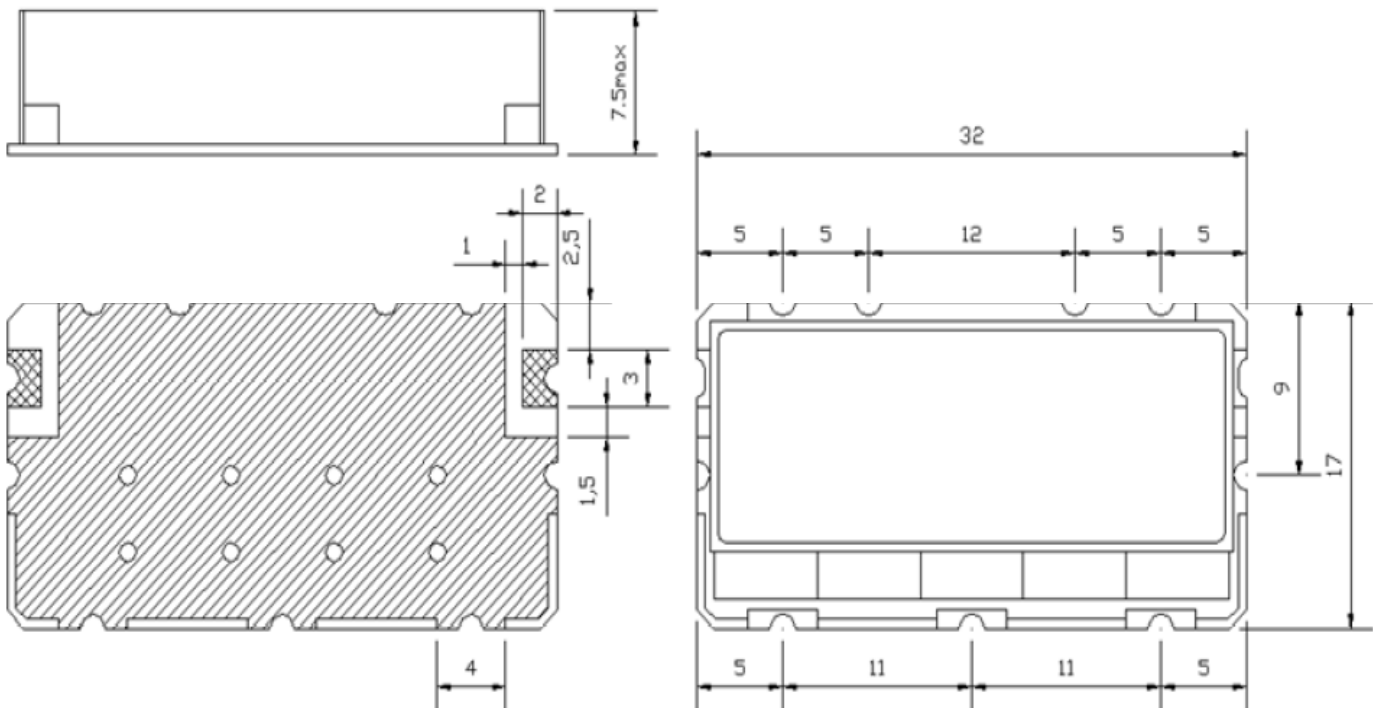

Unit:mm
Tolerance:±0.3