


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

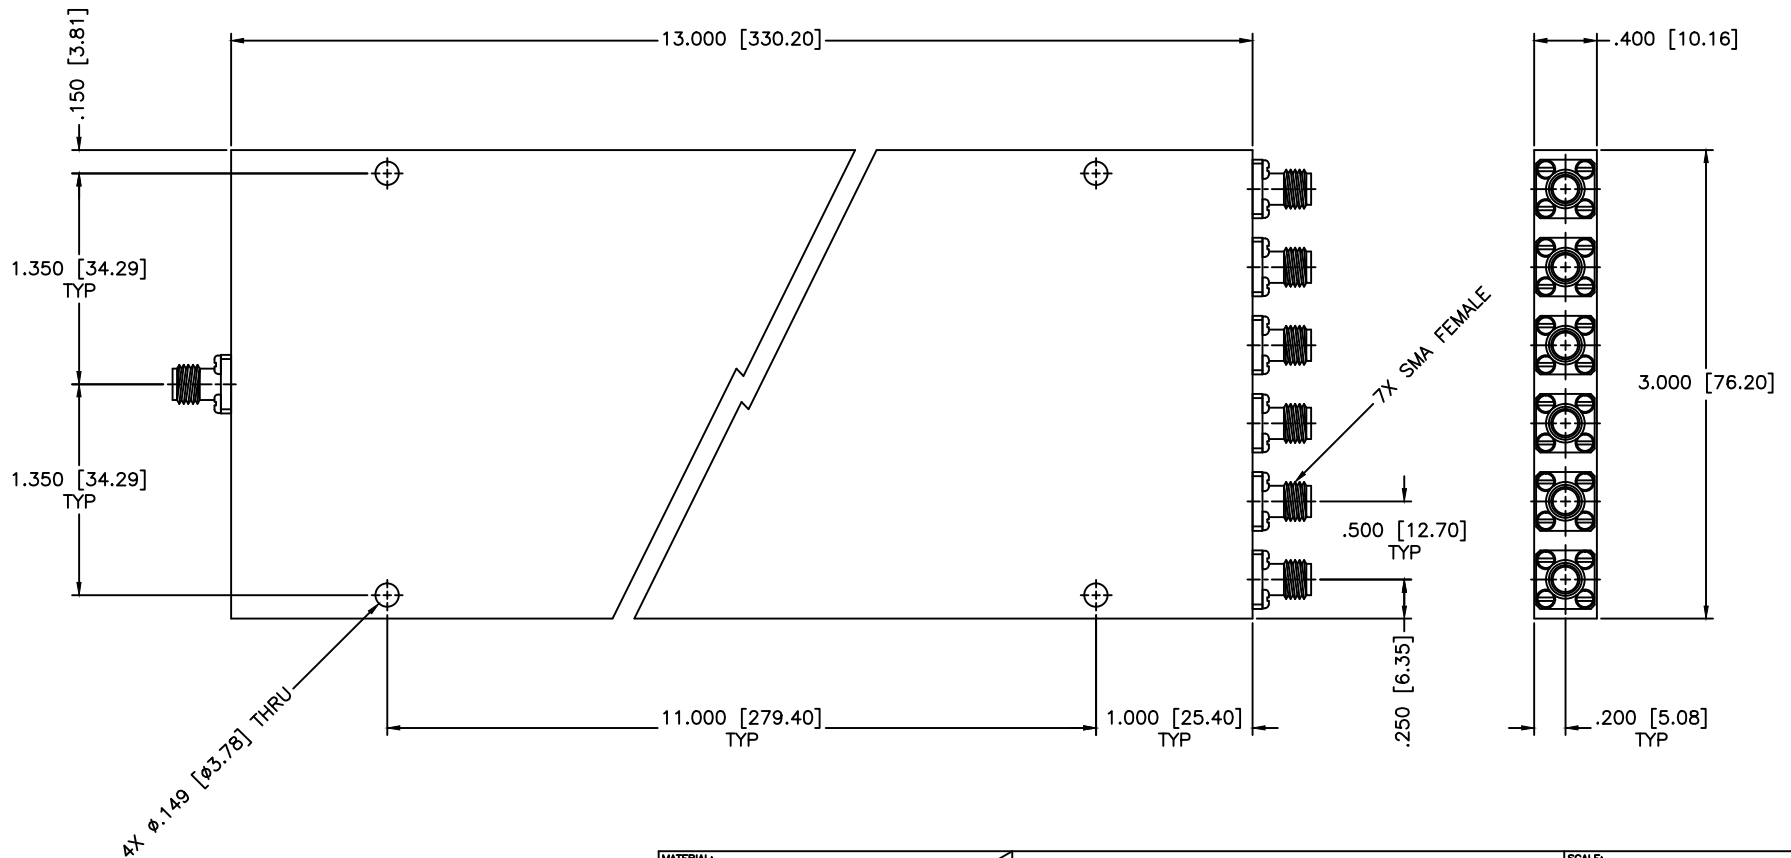

4X ϕ .149 [3.78] THRU

SPECIFICATIONS

Frequency Range: 0.5–18 GHz
 Insertion Loss: 4.9dB Max.
 Isolation: 18dB Min.
 Amplitude Balance: \pm 1.9dB Max.
 VSWR IN/OUT: 2.00:1/1.80:1 Max.
 Input Power: 10W (Load vswr @ 1.2)

MATERIAL:			MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.mcli.com		SCALE:	N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: \pm 1/64 DECIMALS: \pm 0.01 \pm 0.005 ANGLE: \pm 1/2°			DRAWING TITLE:		SHEET:	N/A
DRAWN: Paiboon Luekhamhan		DATE: 06-03-2002		6-WAY POWER DIVIDER		
APPROVED: T. Nguyen		DATE: 06-03-2002		PART NO. PS6-16		
THIRD ANGLE PROJECTION		CAGE CODE: OD2L5	SIZE: N/A	REV: N/A	DWG NO. 81963	
		DO NOT SCALE THE DRAWING				