




Standards
NF C 96-315
MIL-DTL-39030

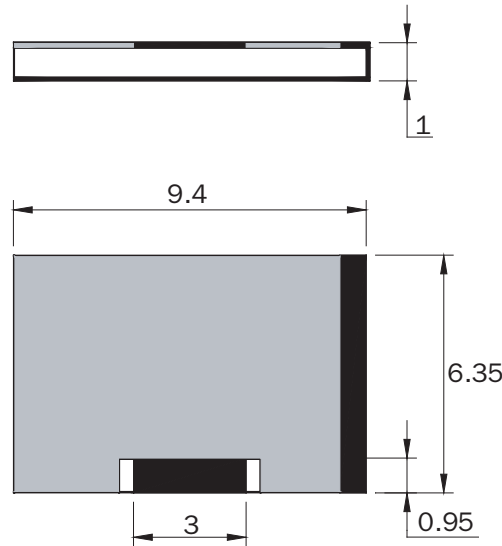

Substrate	Al ₂ O ₃
Resistive film	Thick film
Protection film	Epoxy
Contacts	PtAg

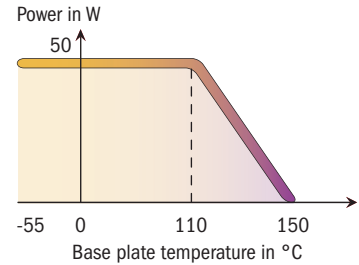

Dimensions in mm

P/N	Frequency (GHz)	Power (W)	Impedance (Ω ± 5%)	Max VSWR
40-0229	2.5	50	50	1.20

mm	inch
0.95	0.037
1	0.039
3	0.118
6.35	0.250
9.4	0.370

Available on Tap and Reel Packaging