


REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

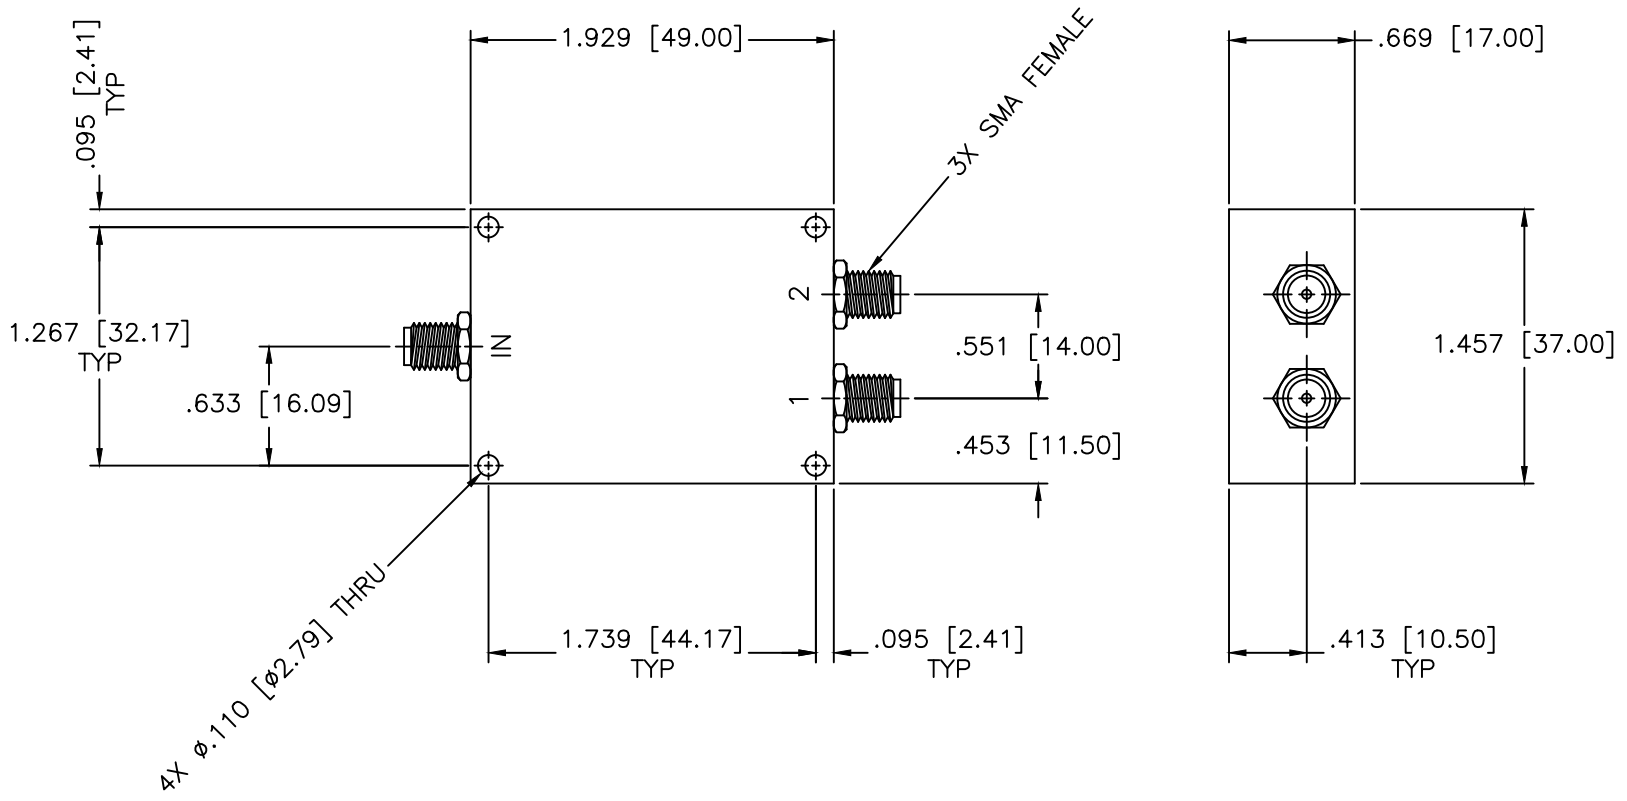

SPECIFICATIONS

Frequency Range: 100–1300 MHz
 Insertion Loss: 1.2dB Max.
 Isolation: 20dB Min.
 VSWR: 1.40:1 Max.
 Forward Power (CW): 1 Watt Max.
 Amplitude Balance: ±0.5 Max.
 Phase Balance: ±5 Deg. Max.
 Impedance: 50 Ohms

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
DRAWN: Paiboon Luengkhamhan		DATE: 03-06-2013	DRAWING TITLE: 2-WAY POWER DIVIDER	
APPROVED: T. Nguyen		DATE: 03-06-2013	PART NO. PL2-33	
<small>UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.01 ±.005 ANGLE: ±1/2°</small>		<small>PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)</small>	CAGE CODE: OD2L5	SIZE: N/A REV: A DWG NO. 84535
		<small>THIRD ANGLE PROJECTION</small> 	DO NOT SCALE THE DRAWING	