


## Model 1447 Medium Power, 7/16 Connectors *Low Intermodulation Design*


## 50 Watts dc to 6.0 GHz



### PHYSICAL DIMENSIONS:

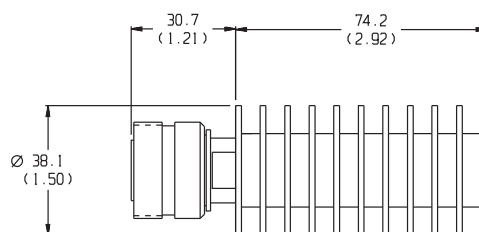

MODEL NO. 1447-1 FEMALE

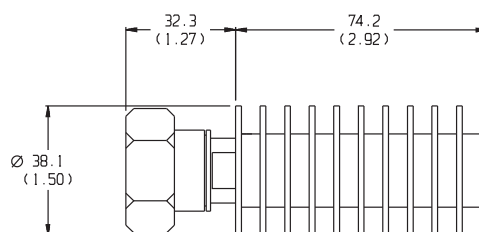

MODEL NO. 1447-2 MALE

NOTE: All dimensions are given in mm (inches) and tolerances are X.X+0.8 (0.03) unless otherwise specified.

### Features

- /// Optimized for Wireless OEM and Test Applications.
- /// Designed to meet environmental requirements of MIL-D-39030.
- /// Custom Designs Available.

### Specifications

**NOMINAL IMPEDANCE:** 50 Ω

**FREQUENCY RANGE:** dc to 6.0 GHz

#### MAXIMUM SWR:

Frequency (GHz)	SWR
dc - 6	1.20

**POWER RATING:** (mounted horizontally assuming unobstructed air flow and natural convection around unit): 50 watts **average** to 25°C ambient temperature, derated linearly to 5 watts @ 125°C. 5 kilowatt **peak** (5 μsec pulse width; 0.5% duty cycle).

**INTERMODULATION:** IM3 (Reflected) = -100 dBc with two +43 dBm Input Tones @ 869 MHz and 891 MHz.

**TEMPERATURE RANGE:** -55°C to 125°C.

**TEST DATA:** Swept data plots of SWR from 50 MHz to 6 GHz is available at additional cost.

**CONNECTOR:** 7/16 connector that conforms to DIN 47 223, IEC 1694, VG 95250, CECC 22190. Choice of 7/16 male(-2) of 7/16 female (-1) connector

**CONSTRUCTION:** Black, finned aluminum body, silver plated brass connector.

**WEIGHT:** Net 354 g (12.5 oz) maximum