


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

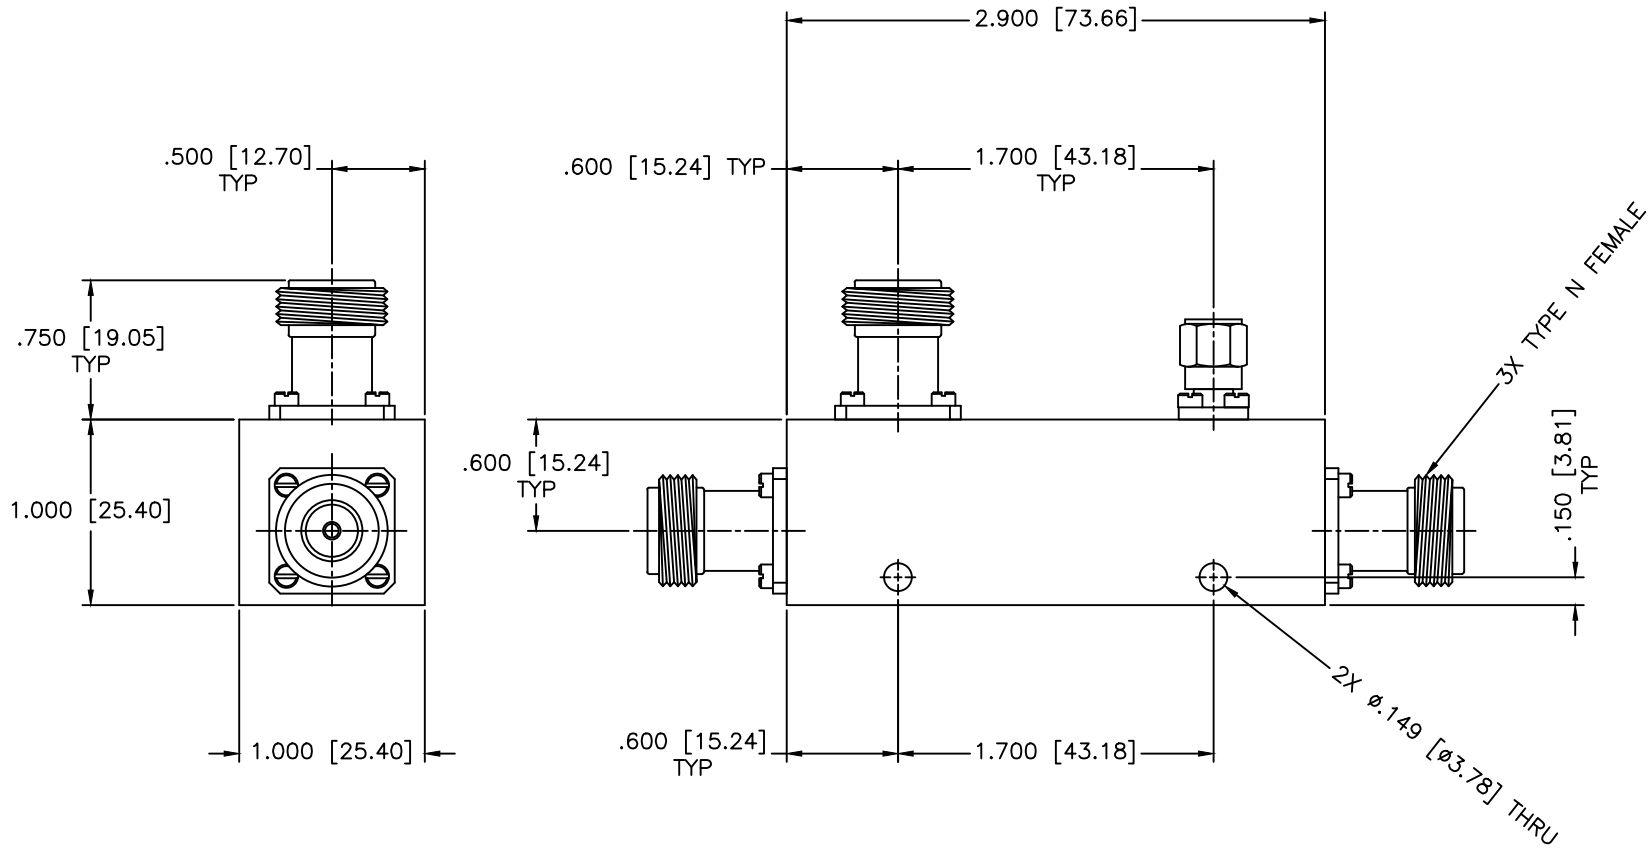

SPECIFICATIONS

- Frequency Range: 2–8 GHz
- Coupling: 20 ± 1.25 dB
- Insertion Loss: 0.5 dB Max.
- Frequency Sensitivity: ± 0.75 dB
- Directivity: 20 dB Min.
- VSWR: 1.35:1 Max.
- Power Avg/Peak: 50W/3kW

MATERIAL:		MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM	SCALE:	N/A
			SHEET:	N/A
		UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm 0.01 \pm 0.08$ ANGLE: $\pm 1/2^\circ$	DRAWING TITLE: DIRECTIONAL COUPLER	
DRAWN: Paiboon Luekhamhan		DATE: 11-17-1997	PART NO. CB3-20/NF	
APPROVED: T. Nguyen		DATE: 11-17-1997	CAGE CODE: OD2L5	SIZE: A REV: N/A DWG NO.: 80507
		PROPRIETARY NOTICE: THE INFORMATION IN THIS DRAWING IS PROPRIETARY AND SHALL NOT BE USED OR DISCLOSED WITHOUT WRITTEN PERMISSION FROM MICROWAVE COMMUNICATIONS LABORATORIES INC. (MCLI)	DO NOT SCALE THE DRAWING	