





Standards
NF C 96-315
MIL-DTL-3933

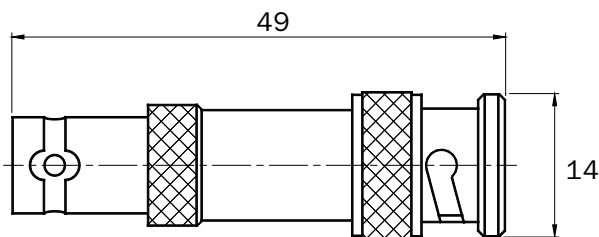

Impedance $50 \Omega \pm 5\%$
 Frequency DC - 2 GHz
 Max VSWR ≤ 1.20 at 1 GHz, ≤ 1.30 at 2 GHz
 Temperature range -55 to +125 °C
 Average power @ 25°C 2 W
 Weight 22 g



Dimensions in mm

Attenuation (dB)	P/N (BNC m/f)	Accuracy* $\pm\Delta\alpha$ (dB)
1	16-0401	0.3
2	16-0402	0.3
3	16-0403	0.3
4	16-0404	0.3
5	16-0405	0.4
6	16-0406	0.4
7	16-0407	0.4

*at 2 GHz

Attenuation (dB)	P/N (BNC m/f)	Accuracy* $\pm\Delta\alpha$ (dB)
8	16-0408	0.4
9	16-0409	0.6
10	16-0410	0.6
12	16-0412	0.6
16	16-0416	0.75
20	16-0420	1
30	16-0430	1

*at 2 GHz

Others attenuations on request

