


REVISIONS				
ZONE	REV	DESCRIPTION	DATE	APPROVED

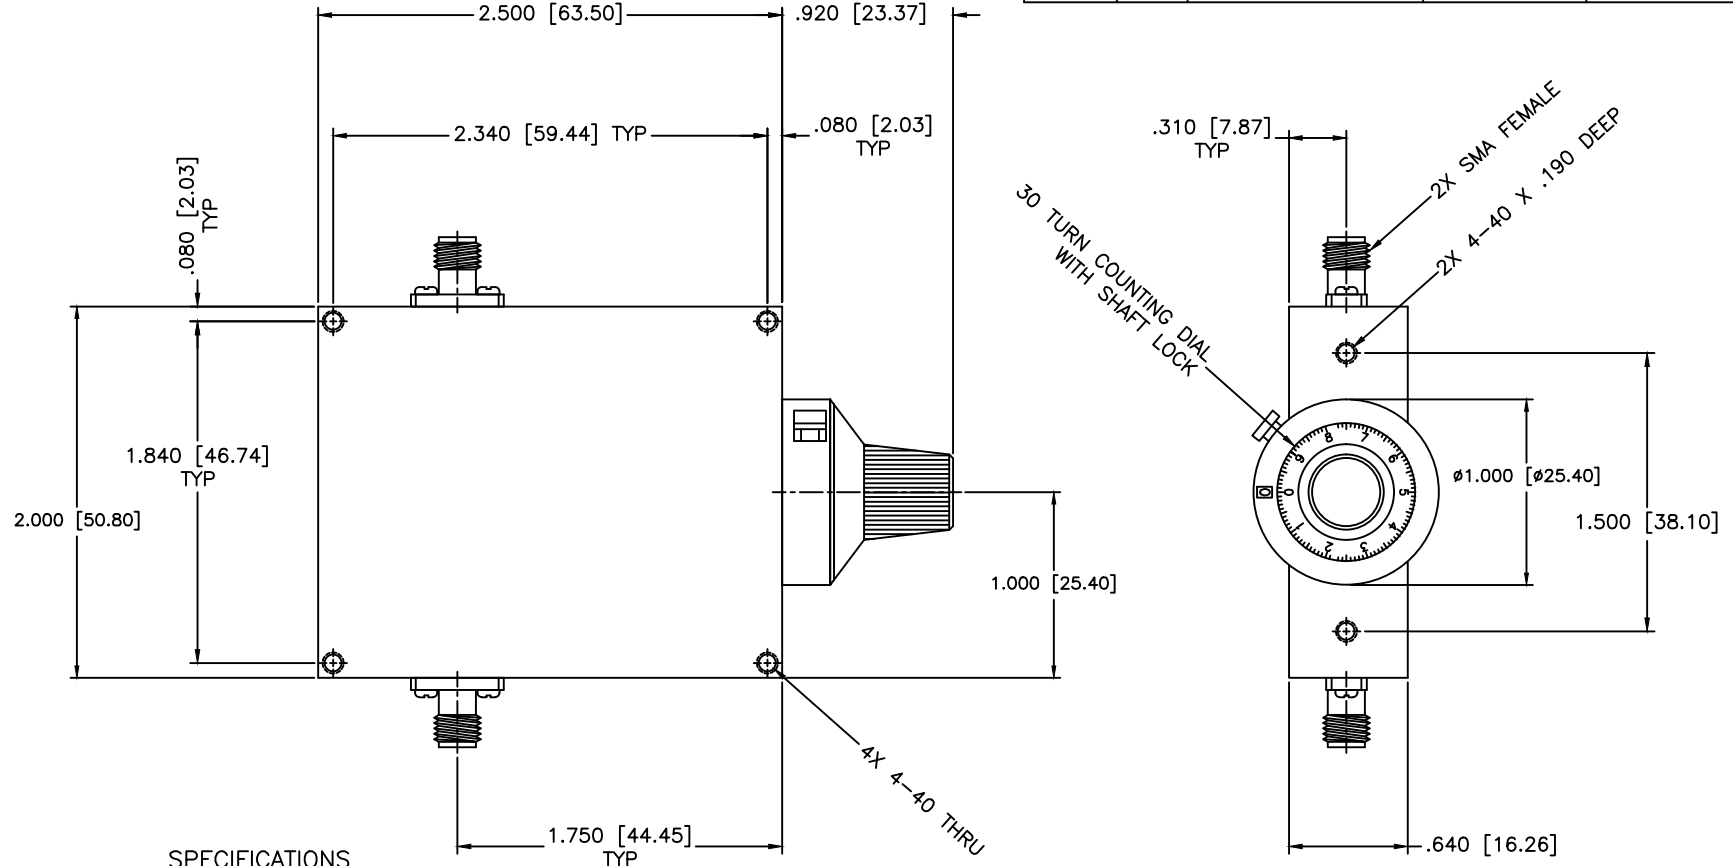

SPECIFICATIONS

Frequency Range: 6–8.5 GHz
 Attenuation: 40dB
 Insertion Loss: 0.5dB Max.
 VSWR: 1.75:1 Max.
 RF Power: 7W Avg. 3kW Peak
 Flatness: ±2.5dB
 Environmental
 Temperature range: –55°C to +110°C
 Shock: 15 G's, 11mS, 1/2 sine
 Vibration: 3 G's overall
 Operating Altitude: 25,000 ft
 Servival Altitude: 40,000 ft.

MATERIAL:	
DRAWN: Paiboon Luekhamhan	DATE: 12-23-2013
APPROVED: T. Nguyen	DATE: 12-23-2013

	MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://WWW.MCLI.COM		SCALE: N/A
	UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: ± 1/64 DECIMALS: ±.02 ±.009 ANGLE: ±1/2°		SHEET: N/A
DRAWING TITLE: FREQUENCY FLAT ATTENUATOR, WITH DIAL		PART NO. CA32-40/D	
CAGE CODE: OD2L5	SIZE: A	REV: A	DWG NO. 86478
DO NOT SCALE THE DRAWING			

