




REVISIONS				
ZONE	REV	DESCRIPTION	Date	APPROVED

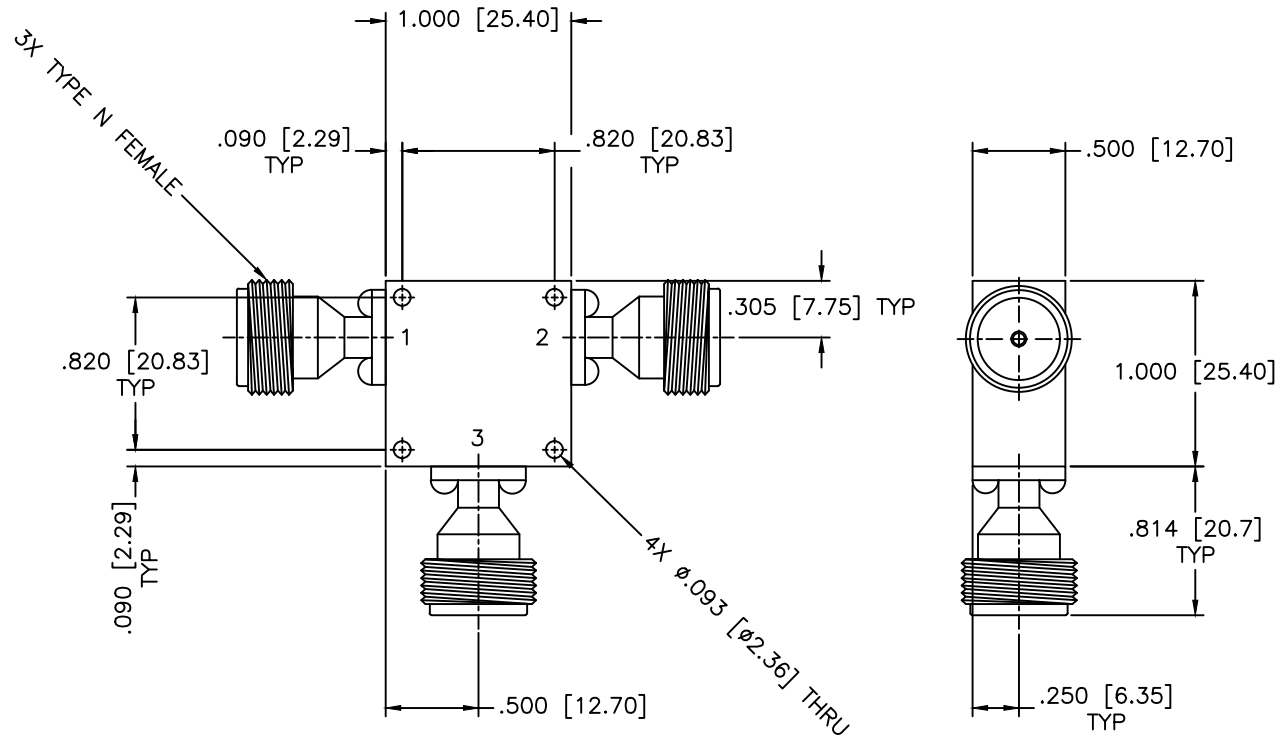

SPECIFICATIONS

Frequency Range: 1.2–1.4 GHz
Isolation: 20dB Min.
Insertion loss: 0.50dB Max.
VSWR: 1.25:1 Max.
Power: 25W Avg. 200W Peak
Operating Temperature: –54°C to +85°C

MATERIAL:		MCLI MICROWAVE COMMUNICATIONS LABORATORIES INC. 7255 30TH AVE. N. SAINT PETERSBURG, FL 33710 TEL: (727) 344-6254 FAX: (727) 381-6116 http://www.MCLI.COM		SCALE: N/A
UNLESS OTHERWISE SPECIFIED: TOLERANCES IN (INCHES) OR [mm] (MILLIMETERS) FRACTIONS: $\pm 1/64$ DECIMALS: $\pm .01 \pm .005$ ANGLE: $\pm 1/2^\circ$		DRAWING TITLE: COAXIAL CIRCULATOR		
		PART NO. CS-37/NF		
DRAWN: Paiboon Luekhamhan	DATE: 10-05-2012	CAGE CODE: OD2L5	SIZE: A	REV: N/A
APPROVED: T. Nguyen	DATE: 10-05-2012		DWG NO. 86174	
THIRD ANGLE PROJECTION		DO NOT SCALE THE DRAWING		

