



3 dB Fixed Attenuator, TNC Male To TNC Female Passivated  
Stainless Steel Body Rated To 2 Watts Up To 18 GHz

TECHNICAL DATA SHEET

PE7030-3

**3 dB Fixed Attenuator, TNC Male To TNC Female Passivated Stainless Steel Body Rated To 2 Watts Up To 18 GHz**

**Configuration**

Design	Fixed, Bidirectional Attenuator
Connector 1	TNC Male
Connector 2	TNC Female
Body Material and Plating	Passivated Stainless Steel

**Electrical Specifications**

Frequency Range, GHz	DC to 18
Impedance, Ohms	50
Attenuation Value, dB	3
Maximum Input Power, Watts	2

**Frequency 1**

Range, GHz	DC to 4
VSWR	1.15:1
Attenuation Accuracy, dB	± 0.3

**Frequency 2**

Range, GHz	4 to 8
VSWR	1.25:1
Attenuation Accuracy, dB	± 0.3

**Frequency 3**

Range, GHz	8 to 12.4
VSWR	1.3:1
Attenuation Accuracy, dB	± 0.3

**Frequency 4**

Range, GHz	12.4 to 18
VSWR	1.35:1
Attenuation Accuracy, dB	± 0.3

**Mechanical Specifications**

**Size**

Length, in [mm]	2.11 [53.59]
Width, in [mm]	0.59 [14.99]

**Connector 1**

Type	TNC Male
Connector Specification	MIL-STD-348

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3 dB Fixed Attenuator, TNC Male To TNC Female Passivated Stainless Steel Body Rated To 2 Watts Up To 18 GHz PE7030-3](#)

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.



3 dB Fixed Attenuator, TNC Male To TNC Female Passivated  
Stainless Steel Body Rated To 2 Watts Up To 18 GHz

TECHNICAL DATA SHEET

PE7030-3

**Connector 2**

Type  
Connector Specification

TNC Female  
MIL-STD-348

**Compliance Certifications** (visit [www.Pasternack.com](http://www.Pasternack.com) for current document)

RoHS Compliant

Yes

**Plotted and Other Data**

Notes:

Values at 25 °C, sea level

3 dB Fixed Attenuator, TNC Male To TNC Female Passivated Stainless Steel Body Rated To 2 Watts Up To 18 GHz from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and fiber optic products maintain a 99% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [3 dB Fixed Attenuator, TNC Male To TNC Female Passivated Stainless Steel Body Rated To 2 Watts Up To 18 GHz PE7030-3](http://www.pasternack.com/3db-fixed-tnc-female-tnc-male-2-watts-attenuator-pe7030-3-p.aspx)


URL: <http://www.pasternack.com/3db-fixed-tnc-female-tnc-male-2-watts-attenuator-pe7030-3-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal.

PE7030-3 CAD Drawing

3 dB Fixed Attenuator, TNC Male To TNC Female Passivated  
Stainless Steel Body Rated To 2 Watts Up To 18 GHz

P/N	ATTEN.	FIGURE
PE7030-1	1 dB	1
PE7030-2	2 dB	1
PE7030-3	3 dB	1
PE7030-6	6 dB	1
PE7030-10	10 dB	1
PE7030-20	20 dB	1
PE7030-30	30 dB	1

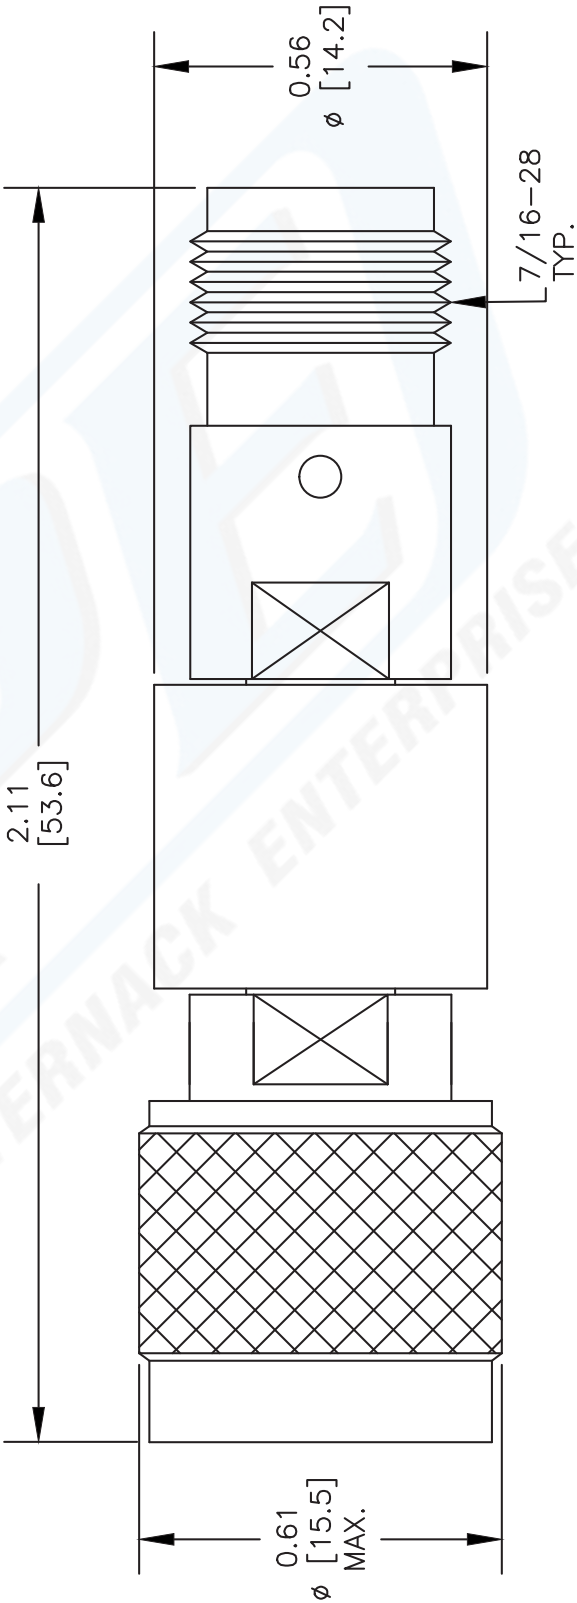

TNC FEMALE

FIGURE 1

TNC MALE

NOTES:  
1. UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE NOMINAL.  
2. ALL SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE AT ANY TIME.  
3. DIMENSIONS ARE IN INCHES [mm].

DWG TITLE  
**PE7030**

FSCM NO. 53919

**PE PASTERNAK®**  
Pasternack Enterprises, Inc.  
P.O. Box 16759 | Irvine | CA | 92623  
Phone: (949) 261-1920 | Fax: (949) 261-7451  
Website: [www.pasternack.com](http://www.pasternack.com) | E-Mail: [sales@pasternack.com](mailto:sales@pasternack.com)