


# Coaxial Bandpass Filter

## ZAFBP-3200+

50Ω 3100 to 3300 MHz

### The Big Deal

- High rejection, 50 dB typical
- Flat group delay 0.4 ns typical
- High power, 10.8W
- Good VSWR, 1.5:1 typical



CASE STYLE: CC1397

### Product Overview

ZABPF-3200+ is a 50Ω filter built into a rugged shielded case (size: 2.00" x 2.00" x 0.75") case. Covering the bandwidth of 3200 MHz ± 100 MHz, this filter offers very good rejection on both lower stopband and upper stopband. The power handling capacity is high as 10.8W at 25°C.

### Key Features

Feature	Advantages
High rejection (50 dB typical on lower side band and > 35 dB rejection till 8500 MHz on upper side band)	This enables the filter to attenuate sub harmonics and spurious signals.
Flat group delay characteristics (0.4 ns typical)	The model has a group delay flatness of 0.4 ns which helps in reducing the signal distortion.
High power (10.8W)	Suitable for base station and long-haul applications and test labs.
Good VSWR (1.5:1 typical in passband)	This provides good matching when used with other devices.



For detailed performance specs & shopping online see web site

P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine  Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)


IF/RF MICROWAVE COMPONENTS

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

# Bandpass Filter

## ZAFBP-3200+

50Ω 3100 to 3300 MHz



### Features

- High rejection, 50 dB typical
- Flat group delay over passband, 0.4 ns typical
- Good VSWR, 1.5:1 typical in passband
- Rugged shielded case

### Applications

- Harmonic rejection
- Transmitters / receivers
- Lab use

Connectors	Model	CASE STYLE: CC1397 Price	Qty.
SMA-FEMALE	ZAFBP-3200-S+	\$69.95 ea.	(1-9)

### Electrical Specifications at 25°C


Parameter	F#	Frequency (MHz)	Min.	Typ.	Max.	Unit	
Pass Band	Center Frequency	—	—	3200	—	MHz	
	Insertion Loss	F1-F2	3100 - 3300	—	4.0	5.0	dB
	VSWR	F1-F2	3100 - 3300	—	1.5	1.9	:1
Stop Band, Lower	Insertion Loss	DC-F3	DC-2800	20	29	—	dB
	VSWR	DC-F3	DC-2800	—	24	—	:1
Stop Band, Upper	Insertion Loss	F4-F5	3550 - 8500	20	30	—	dB
	VSWR	F4-F5	3550 - 8500	—	7	—	:1

### Maximum Ratings

Operating Temperature	-55°C to 100°C
Storage Temperature	-55°C to 100°C
RF Power Input	10.8W max. at 25°C

\* Derate linearly to 5.5W at 100°C ambient.  
Permanent damage may occur if any of these limits are exceeded.


### Functional Schematic

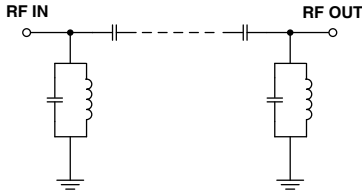

### Typical Performance Data at 25°C





Frequency (MHz)	Insertion Loss (dB)	VSWR (:1)	Frequency (MHz)	Group Delay (nsec)
10.0	94.83	1737.18	3100.0	4.24
500.0	61.50	157.93	3110.0	4.24
1600.0	46.69	124.09	3120.0	4.25
2800.0	29.32	24.14	3140.0	4.25
2925.0	13.31	4.51	3150.0	4.24
2975.0	7.14	1.76	3160.0	4.22
3000.0	5.37	1.38	3170.0	4.20
3100.0	3.19	1.42	3180.0	4.18
3200.0	3.42	1.39	3190.0	4.19
3300.0	3.82	1.51	3195.0	4.19
3400.0	6.11	1.06	3200.0	4.20
3450.0	13.05	2.57	3210.0	4.23
3500.0	26.02	8.01	3220.0	4.27
3550.0	38.85	15.81	3230.0	4.31
3600.0	50.12	23.81	3240.0	4.35
3620.0	53.71	26.74	3250.0	4.38
3700.0	58.37	37.77	3260.0	4.41
4700.0	50.44	51.10	3270.0	4.44
6000.0	40.79	54.29	3280.0	4.47
8500.0	42.84	22.00	3300.0	4.58

### Typical Frequency Response



+ RoHS compliant in accordance with EU Directive (2002/95/EC)

The +Suffix has been added in order to identify RoHS Compliance. See our web site for RoHS Compliance methodologies and qualifications.

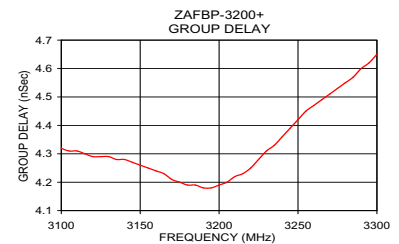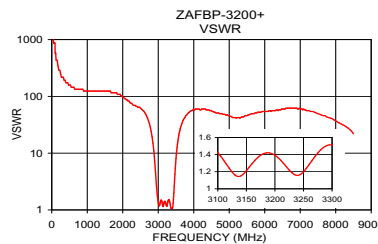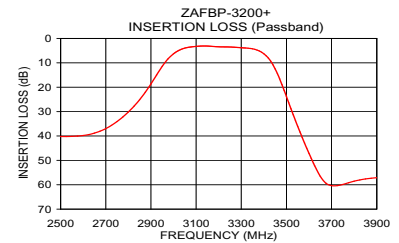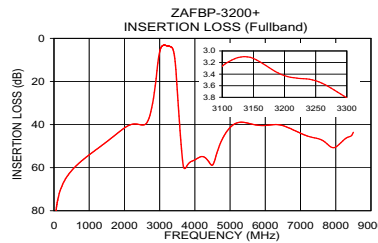

For detailed performance specs & shopping online see web site


P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 The Design Engineers Search Engine Provides ACTUAL Data Instantly at [minicircuits.com](http://minicircuits.com)

Notes: 1. Performance and quality attributes and conditions not expressly stated in this specification sheet are intended to be excluded and do not form a part of this specification sheet. 2. Electrical specifications and performance data contained herein are based on Mini-Circuit's applicable established test performance criteria and measurement instructions. 3. The parts covered by this specification sheet are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained therein. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at [www.minicircuits.com/MCLStore/terms.jsp](http://www.minicircuits.com/MCLStore/terms.jsp).

## Coaxial Connections

INPUT	1 (SMA female)
OUTPUT	2 (SMA female)

## Outline Drawing

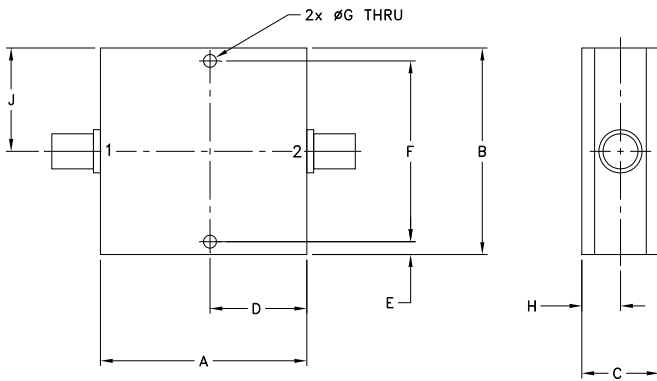

## Outline Dimensions ( $\frac{\text{inch}}{\text{mm}}$ )

A	B	C	D	E	F
2.00	2.00	.75	.938	.13	1.750
50.80	50.80	19.05	23.83	3.30	44.45
G	H	J			wt
.125	.38	1.00			grams
3.18	9.65	25.40			100.0